


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	ZY

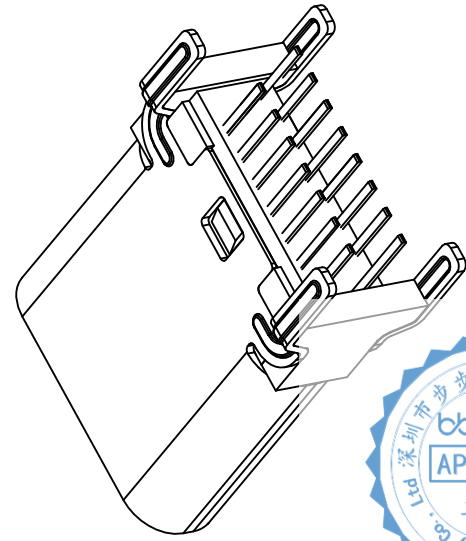

一. 原材料:

1. 塑胶: UL 94V-0型LCP黑色
2. 端子: 0.15厚铜合金 C2680/C7025
3. 外壳: 不锈钢 201/304
4. 中夹片: 不锈钢 201/304

二. 电镀:

1. 端子: 半金亮锡1u"
2. 外壳: 镀镍

三. 机械性能:

- 插入力: 5~20N
- 拔出力: 寿命测试前8~20N, 寿命测试后5~20N
- 耐插拔: 500次/H, 10000次
- 工作温度: 0°C~+50°C
- 储存温度: -20°C~60°C





四. 电气性能:

- 额定电流: C2680/3A; C7025/5A
- 接触阻抗: 寿命测试前40 mMax, 寿命测试后50 mMax
- 耐高压: 100V AC 1分钟 Min. 无击穿, 无电弧
- 绝缘阻抗: 100 M Min.


五. 环境性能:

- 环保: 产品符合ROHS要求
- 盐雾测试: 温度35±2°C, 湿度: 95—98%, PH值: 6.5—7.2, 镀金区48H, 镀镍区24H

4. 焊接工艺: 推荐使用回流焊, 本产品耐温260度, 8S

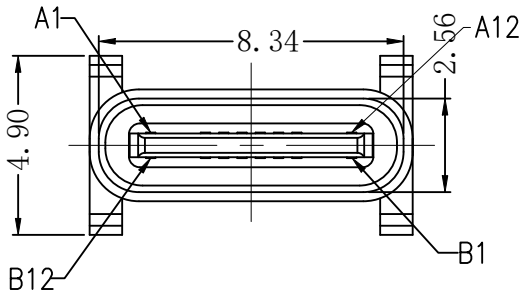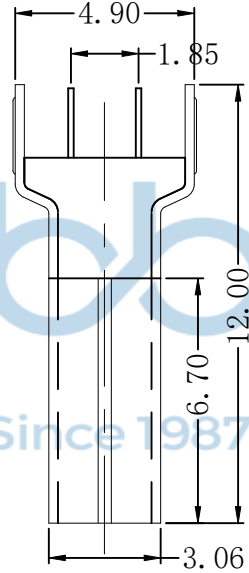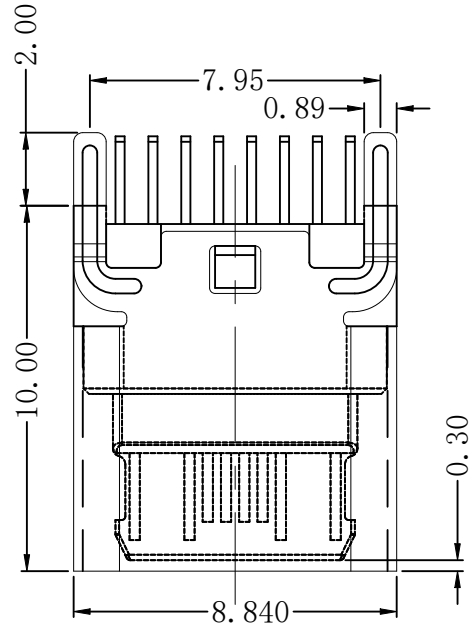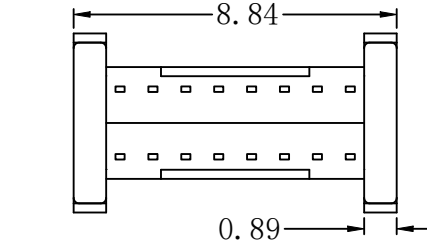

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SR02
A6	EP1	B7	DN2
A7	DN1	B6	DP2
A8	SR01	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

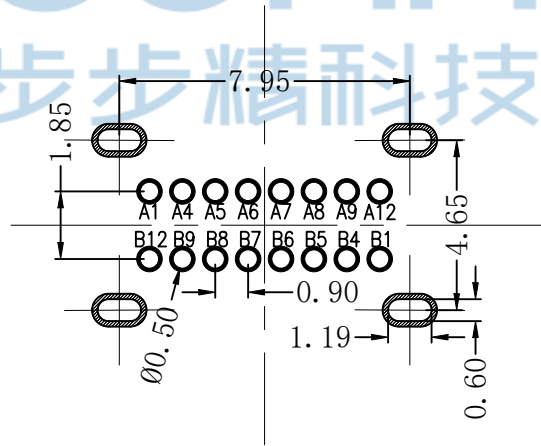

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0545-1

APPD. JM_Zheng

CHKD. LYX

DR. ZY

深圳市步步精科技有限公司

NAME: TYPE-C 母座 16P 直立式 外壳四脚插 端子DIP=10.0 带中夹片 编带(新款)

PJ. NO.: 126-225-160006-N7G





SIZE: A4 | DRW NO.:

FINISH: SEE NOTES | MAT'L.: SEE NOTES

SCALE: N/A | REV.: A0 | UNIT: mm | PAGE: 1/2

公差: .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3' .X': ±2' .XX': ±1'

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	ZY

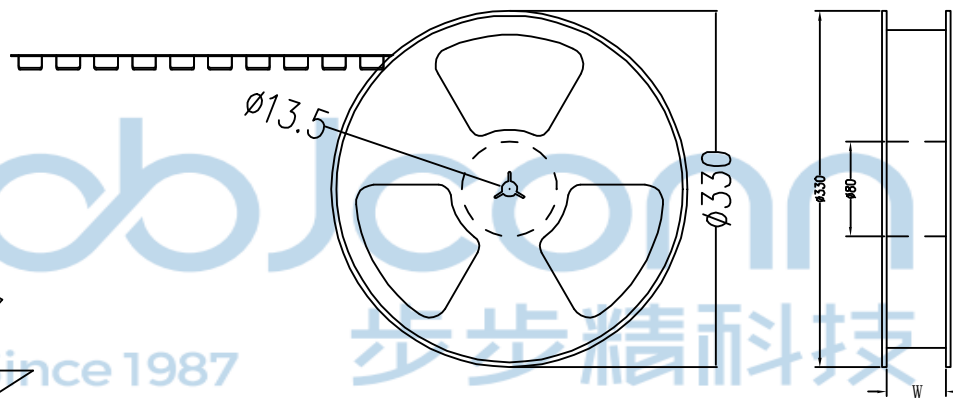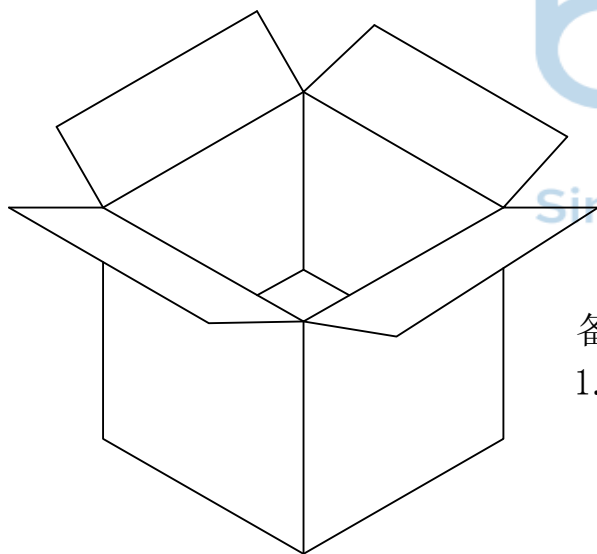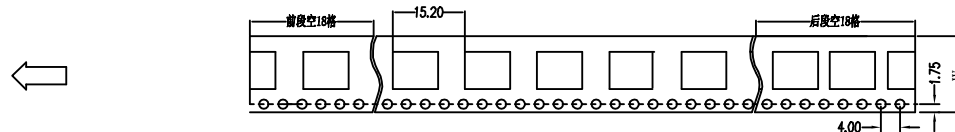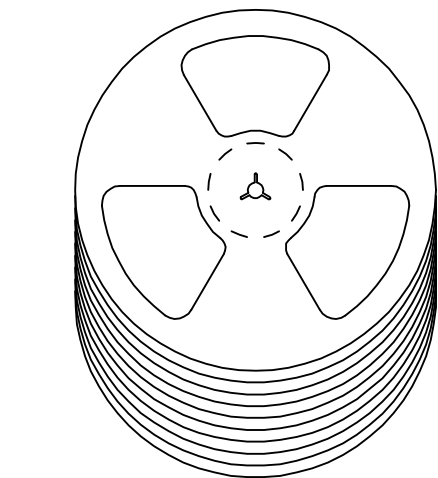

备注：
1. 包装数量：500/PCS/卷，10卷/箱。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 X': ±3" .XX: ±0.25 X'': ±2" .XXX: ±0.13 XX': ±1"		NAME: TYPE-C 母座 16P 直立式 外壳四脚插 端子DIP H=10.0 带中夹片 编带 (新款)	
APPD.	JM_Zheng	PJ. NO.: 126-225-160006-N7G		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0545-1	DR.	ZY	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2