

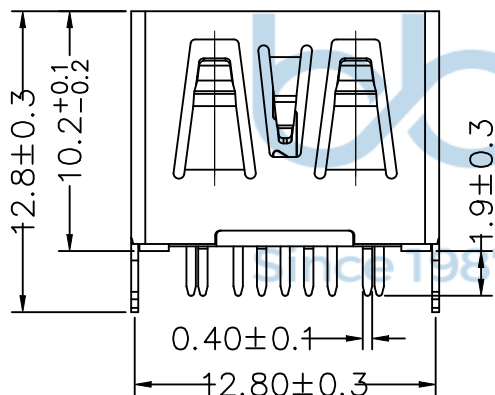
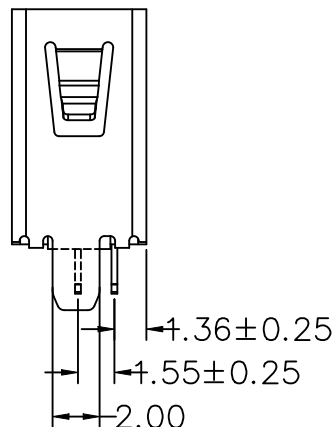
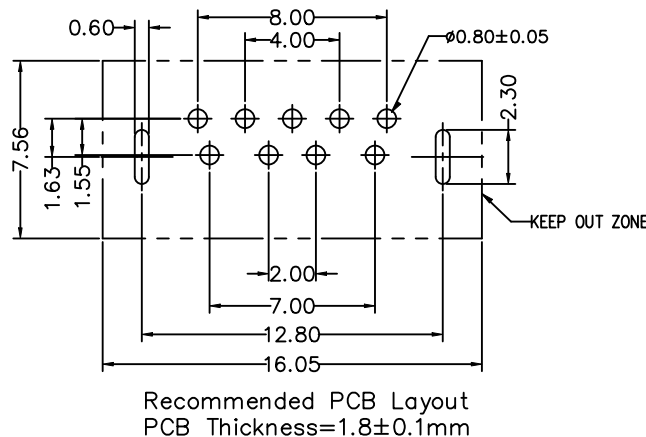


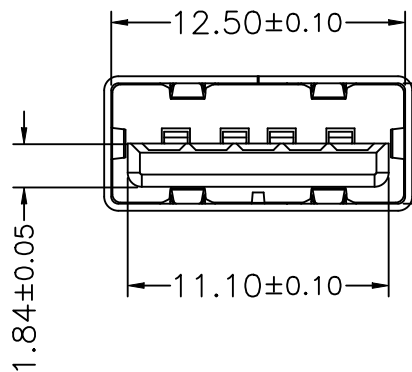


Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTE:

- MATERIAL:
 - INSULATOR:HIGH TEMPERATURE PLASTIC
 - CONTACT:BRONZE
 - SHELL:STAINLESS STEEL SUS201/C2680
- ELECTRICAL CHARACTERISTICS;
 - CONTACT RESISTANCE:30mΩ MAX
 - CONTACT CURRENT RATING:1.5A
 - DIELECTRIC WITHSTANDING VOLTAGE:100 V R. M. S.
 - INSULATION RESISTANCE 100 MΩ MIN
 - OPERATING TEMPERATURE:-40° C ~ 85° C
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE:3.57kgf MAX
 - UNMATING FORCE:1.02kgf MIN
 - DURABILITY:MANDATORY:1,500 CYCLES
- PLATING
 - TERMINAL:
 - 50u" MIN NICKEL ALL OVER
 - 120u" MIN Tin ON SOLDER AREA
 - 1u" Au ON CONTACT AREA
 - SHELL:50u" MIN. NICKEL ALL OVER

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO:	0536-1	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"
NAME:	USB 3.0 AF 180度 两脚直插 端子DIP H=10.20 平口 LCP蓝胶 不锈钢外壳		
APPD.	JM_Zheng	PJ. NO.: 127-275-040001-P2G	SIZE: A4 DRW NO.:
CHKD.	LYX	FINISH: SEE NOTES	MAT'L.: SEE NOTES
DR.	TSP	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

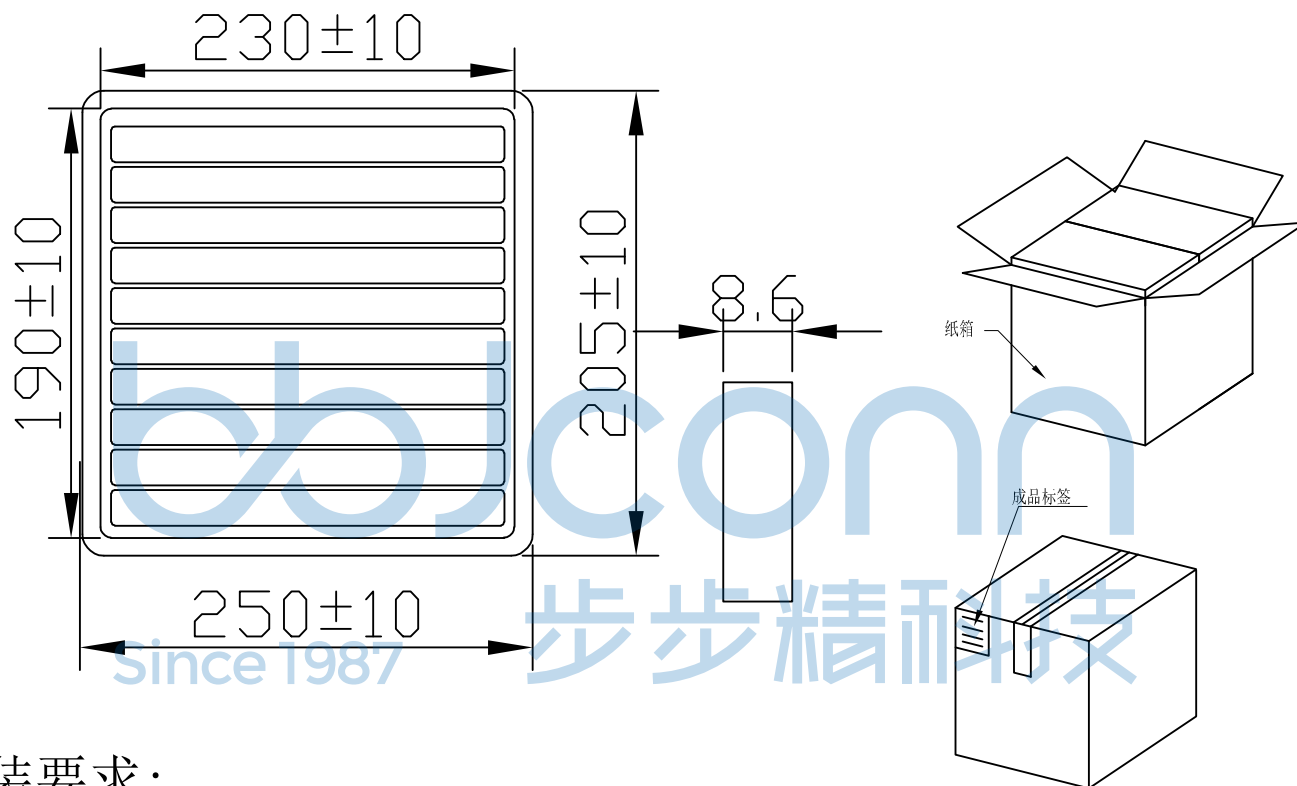

纸箱规格: 350*210*290

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每50盘放一箱, 共计5000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0536-1		NAME: USB 3.0 AF 180度 两脚直插 端子DIP H=10.20 平口 LCP蓝胶 不锈钢外壳	
APPD.	JM_Zheng	PJ. NO.:	127-275-040001-P2G
CHKD.	LYX	SIZE: A4	DRW NO.:
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2