





REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

NOTE:

- MATERIAL:
 - INSULATOR:HIGH TEMPERATURE PLASTIC,LCP BLUE.
 - CONTACT:BRONZE
 - SHELL:BRASS
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE:30mΩ MAX
 - CONTACT CURRENT RATING:1.5A
 - DIELECTRIC WITHSTANDING VOLTAGE:100 V R. M. S.
 - INSULATION RESISTANCE 100 MΩ MIN
 - OPERATING TEMPERATURE:-40° C ~ 85° C
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE:3.57kgf MAX
 - UNMATING FORCE:1.02kgf MIN
 - DURABILITY:MANDATORY:1,500 CYCLES
- PLATING
 - TERMINAL:
 - 50u" MIN NICKEL ALL OVER
 - 100u"MIN Tin ON SOLDER AREA
 - (1~30)u"Au ON CONTACT AREA
 - SHELL:100u"MIN. NICEL ALL OVER

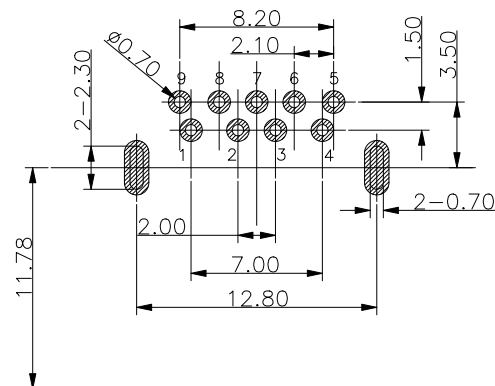


RECOMMENDED PCBA LAYOUT
(TOLERANCE+/-0.05)

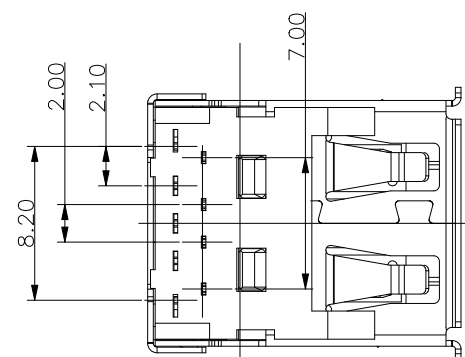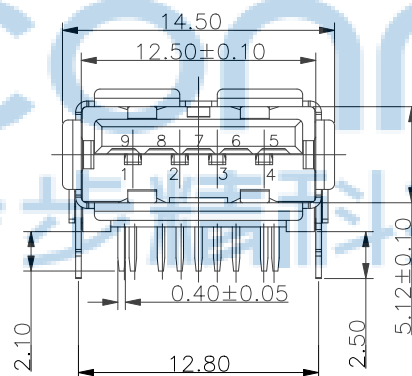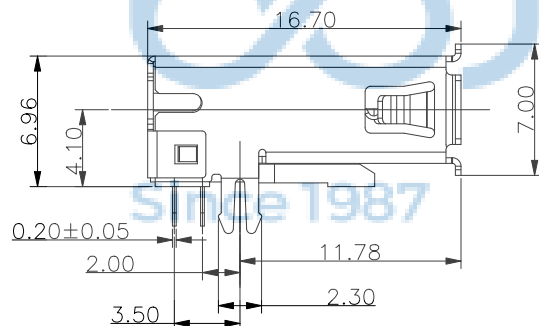

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0536-1		深圳市步步精科技有限公司		NAME:USB 3.0 AF 90度 板上型 外壳两脚DIP 端子DIP L=16.70 鱼叉脚 卷边 铜壳 LCP蓝胶 盒装	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	APPD.	JM_Zheng	PJ. NO.: 127-272-090029-P2G	SIZE: A4 DRW NO.:
CHKD.	LYX	FINISH:	SEE NOTES	MAT'L.:	SEE NOTES
DR.	GZY	SCALE:	N/A	REV.:	A0
		UNIT:	mm	PAGE:	1/2

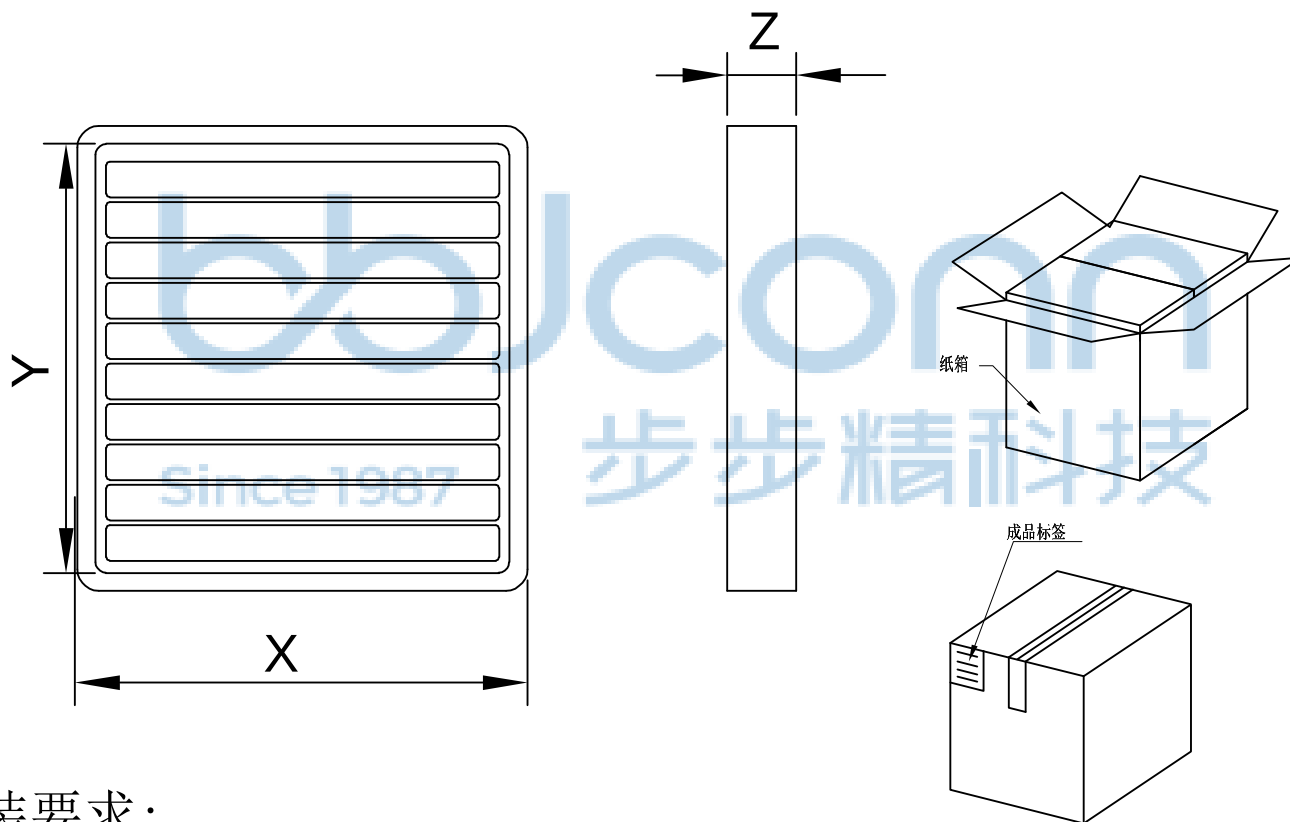

纸箱规格: 350*210*290

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
 - 1.2 每23盘放一箱, 共计2300PCS;
 - 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司		NAME: USB 3.0 AF 90度 板上型 外壳两脚DIP 端子DIP L=16.70 鱼叉脚 卷边 铜壳 LCP蓝胶 盒装	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		PJ. NO.: 127-272-090029-P2G	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
DR. GZY		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO: 0536-1		SCALE: N/A		REV.: A0	
		UNIT: mm		PAGE: 2/2	