
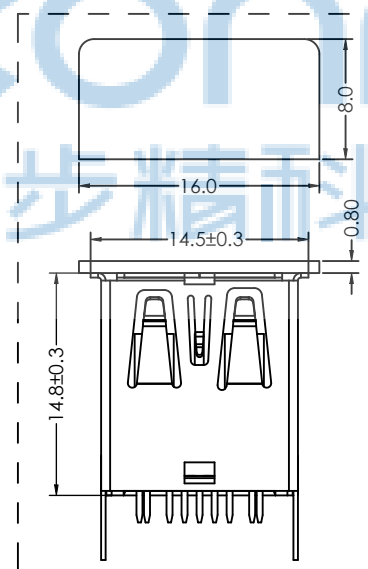
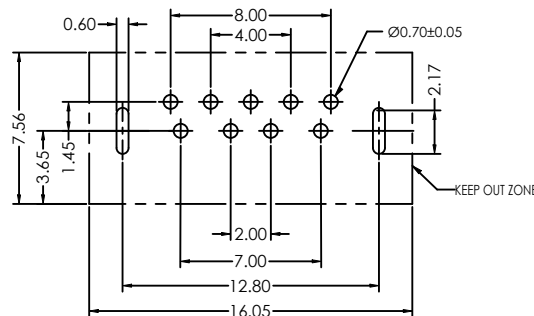


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

NOTE:

1. MATERIAL:

- 1.1 INSULATOR:HIGH TEMPERATURE PLASTIC
- 1.2 CONTACT:BRONZE
- 1.3 SHELL:BRASS
2. ELECTRICAL CHARACTERISTICS;
 - 2.1 CONTACT RESISTANCE:30mΩ MAX
 - 2.2 CONTACT CURRENT RATING:1.5A
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R. M. S.
 - 2.4 INSULATION RESISTANCE 100 MΩ MIN
 - 2.5 OPERATING TEMPERATURE:-40° C ~ 85° C
- 3 MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE:3.57kgf MAX
 - 3.2 UNMATING FORCE:1.02kgf MIN
 - 3.3 DURABILITY:MANDATORY:1,500 CYCLES
4. PLATING
 - 4.1 TERMINAL:
 - 50u" MIN NICKEL ALL OVER
 - 120u"MIN Tin ON SOLDER AREA
 - (1~30)u"Au ON CONTACT AREA
 - 4.2 SHELL:50u"MIN. NICEL ALL OVER
5. PART NO.

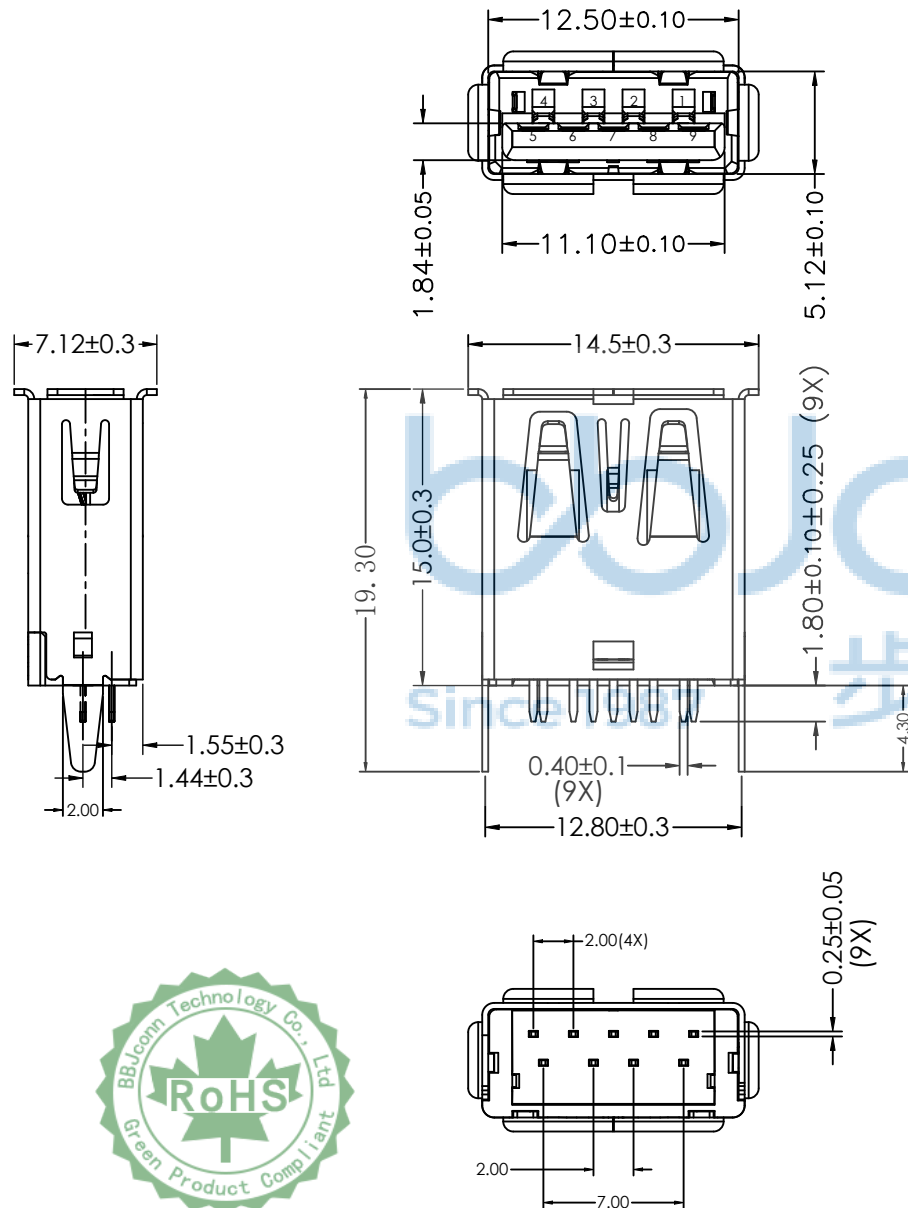

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0536-1

深圳市步步精科技有限公司		NAME: USB 3.0 A母 180 两脚插 无柱 卷边 带弹 L=19.3 LCP黑胶 端子DIP 外壳脚长1.8 铜壳 盒装	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' X': ±2' .XX': ±1'	P.J. NO.: 127-275-090010-P2G SIZE: A4 DRW NO.: FINISH: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm	
APPD. JM_Zheng	CHKD. LYX	MAT'L: SEE NOTES PAGE: 1/2	
DR. SGF			


包装作业图示及说明 (PACKING OPERATION DIAGRAM & INSTRUCTION)

一:

- 1) 将成品一一放入包装盘内, 依同一方向放入.
- 2) 包装时, 依图所示.
- 3) 一个吸塑盘放置100个成品.
- 4) 依次往上叠放30盘, 产品方向保持一致, 上下各放一块硬纸板, 用PE膜将托盘两边缠绕(PE鲜膜距托盘边约50mm)再在托盘中缠绕成#字形为一扎, (缠绕3~5圈. 用力要适当)




装盘

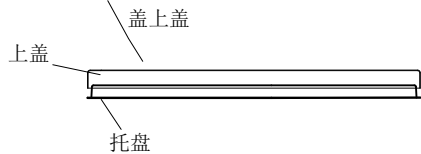


二:

- 1) 将一扎托盘放入纸箱中.
- 2) 纸箱内放2包干燥剂
- 3) 每箱装3000PCS成品

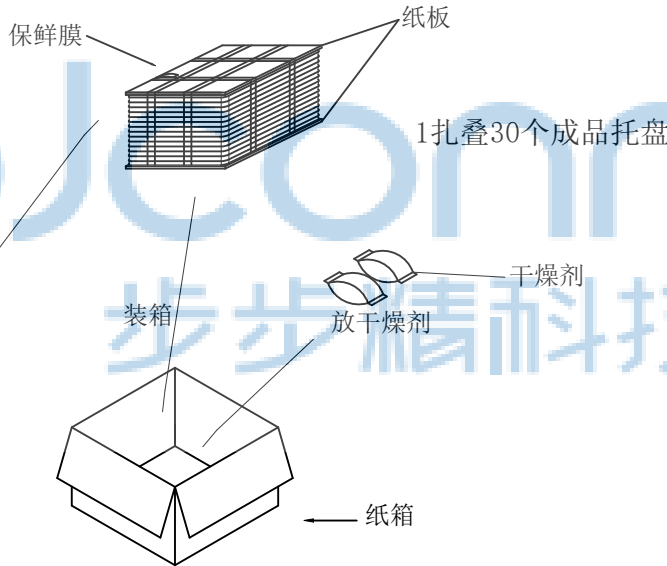


三:

- 1) 用透明胶将纸箱封实.
- 2) 将标签(按要求打印好的)贴在纸箱侧麦上方.



标签粘贴处

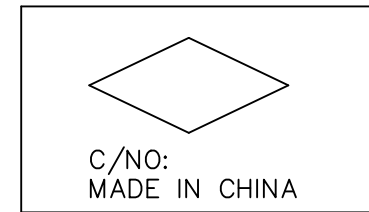

备注 (REMARK)

- 1) 装不满一个外箱的, 用填充物填满未空间或将纸箱割小至刚好装下.
- 2) 在搬运过程中要轻拿轻放.
- 3) 在运输中不可堆放过多, 不可有重压现象.
- 4) 跌落测试条件: 成品箱子从1.0米高自由落体: (三棱六面一角)
检验项目: 1. 产品不可跑出包装盘凹槽.
2. 产品不可有摔伤, 变形.
3. 外箱及内包装材料不可严重破损.

产品	料号	沉板 SMT&DIP	3000
透明胶		W=47	若干
PE膜		W=68	若干
干燥剂		1.2g/包	2包
纸板		314*224*3	2
托盘		314*224*9	30
纸箱		330*235*290	1
品名	料号	规格 (mm)	用量 (PCS)



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0536-1

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'	NAME: USB 3.0 A母 180 两脚插 无柱 卷边 带弹 L=19.3 LCP黑胶 端子DIP 外壳脚长1.8 铜壳 盒装
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: 127-275-090010-P2G
DR. SGF		SIZE: A4 DRW NO.:
		FINISH: SEE NOTES MAT'L: SEE NOTES
		SCALE: N/A REV.: AO UNIT: mm PAGE: 2/2