
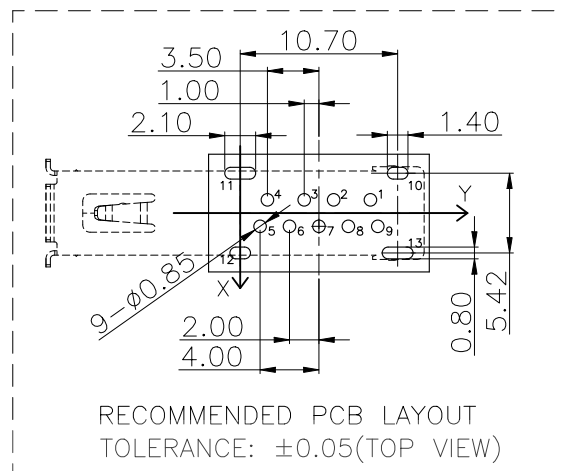
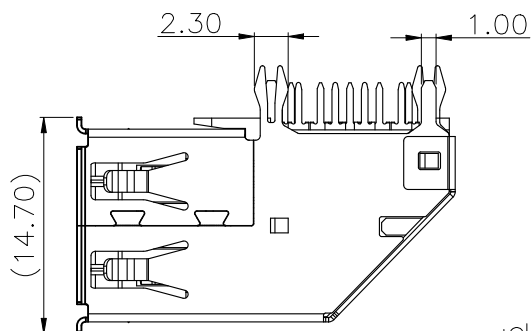

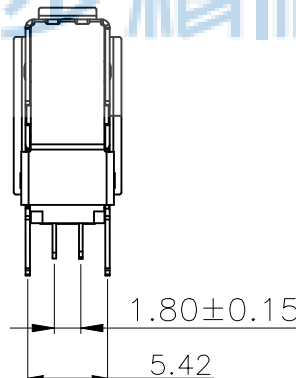
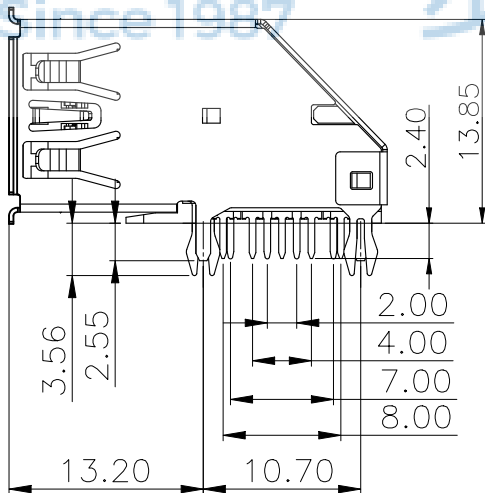


5.12±0.10

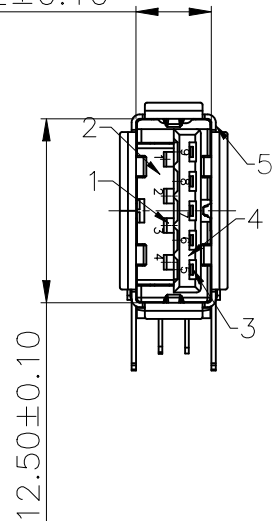

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSRT+

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

SPECIFICATIONS:

Contact current Rating:

1.8 Amperes for pin1&pin4.

0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)

Insulation resistance:100Megohms Minimum.

Contact Resistance:

30mΩ Max for pin1&pin4

50mΩMax for other contacts

Mechanical Characteristics:

Mating Force:35 Newtoms.Maximum

Unmating Force:10 Newtoms.Mlimum.

Operating Temperature:-40 °C+85 °C



ITEM	PART NAME	Material	Q'TY	REMARK
1	4P Semi-	Housing LCP&PBT	1	Black &Blue UL94V-0
2	manufactured Goods	Contact COPPER ALLOY	4	T=0.25 Plating Gild/Tin
3	5P Semi-	Housing LCP&PBT	1	Black &Blue UL94V-0
4	manufactured Goods	Contact COPPER ALLOY	5	T=0.25 Plating Gild/Tin
5	Shell	Stainless Steel	1	T=0.3

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0886-1



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3"
.XX: ±0.25 .X': ±2"
.XXX: ±0.13 .XX': ±1"

NAME: USB 3.0 A母 侧插 DIP 小鱼叉直脚
卷边 LCP蓝胶 不锈钢外壳 L=25.70 盒装

APPD. JM_Zheng




PJ. NO.: 127-272-090001-K4G

CHKD. LYX

SIZE: A4 DRW NO.:

DR. TSP

FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

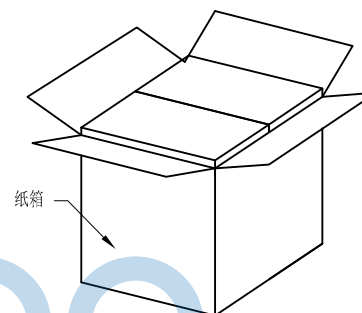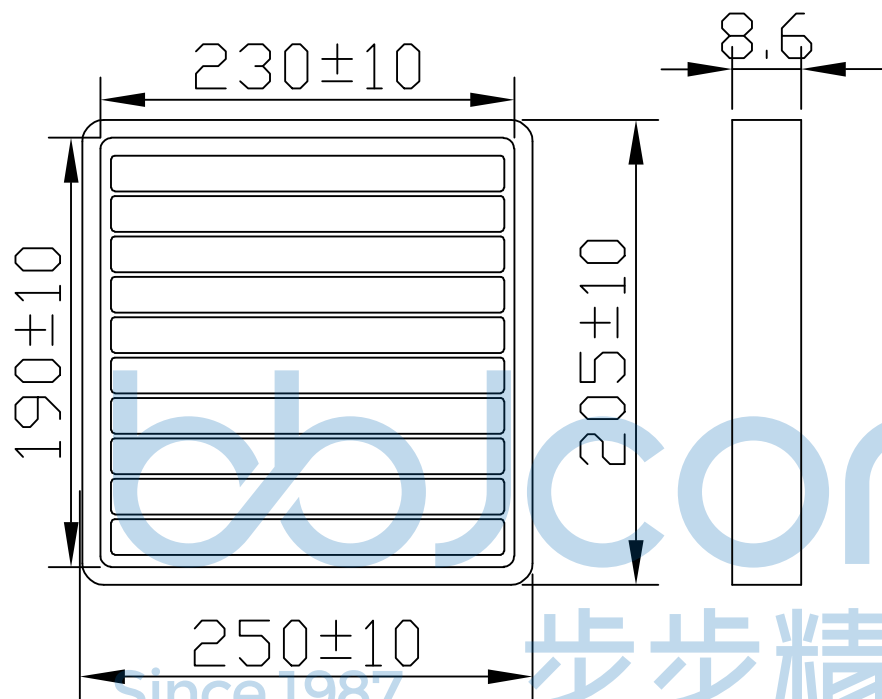

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0886-1		深圳市步步精科技有限公司			
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
		NAME: USB 3.0 A母 侧插 DIP 小鱼叉直脚 卷边 LCP蓝胶 不锈钢外壳 L=25.70 盒装			
				PJ. NO.: 127-272-090001-K4G SIZE: A4 DRW NO.:	
		APPD. JM_Zheng CHKD. LYX		FINISH: SEE NOTES SCALE: N/A	
UNIT: mm		PAGE: 2/2			