

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdB_SSTX-
6	StdB_SSTX+
7	GND_DRAIN
8	StdB_SSRX-
9	StdB_SSRX+
Shell	Shield



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTE:

1. MATERIAL:

- 1.1 INSULATOR:LCP UL 94V-0
- 1.2 CONTACT:COPPER(5PIN:T=0.20/4PIN:T=0.25)
- 1.3 SHELL:BRASS(T=0.30/T=0.20)

2. ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACTRESISTANCE:30mΩ MAXIMUM
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100VR.M.S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS MIN
- 2.5 OPERATING TEMPERATURE:-40° C ~ 85° C

3. MECHANICAL CHARACTERISTICS:

- 3.1 MATING FORCE:3.57kg MAX
- 3.2 UNMATED FORCE:1.02kg MIN INITIAL/0.82kg MIN AFTER TEST.
- 3.3 DURABILITY:1,500 CYCLES MIN






4. PLATING

TERMINAL:50u" MIN NICKEL ALL OVER 80u"MIN Tin
ON SOLDER AREA Au G/F ON CONTACT AREA

4.2 SHELL:NICEL PLATED

5. "▼" FOR MAJOR DIM.

6. "⊗" FOR FAI DIM.

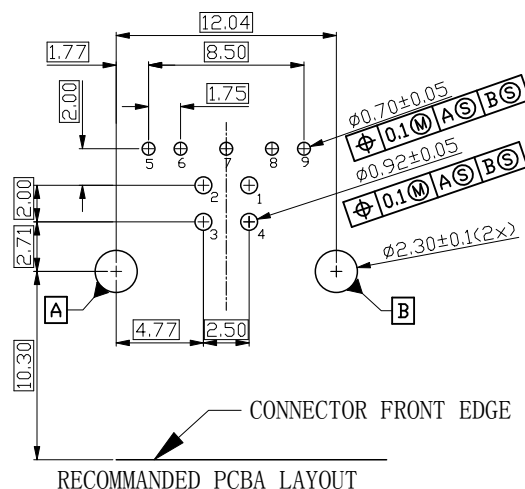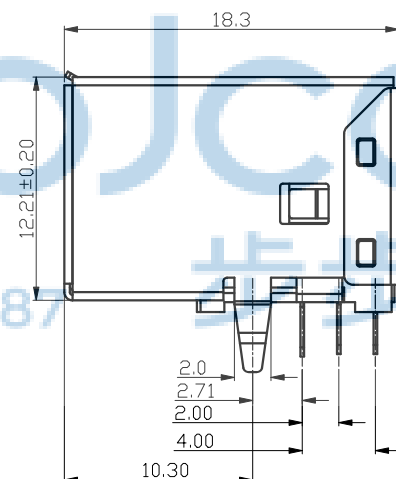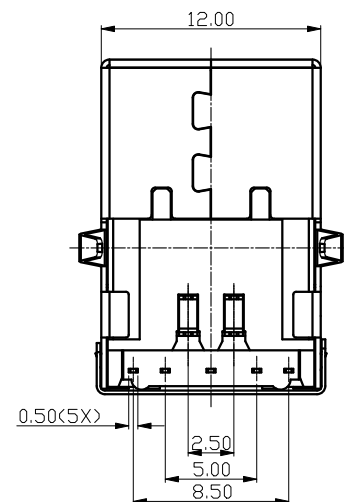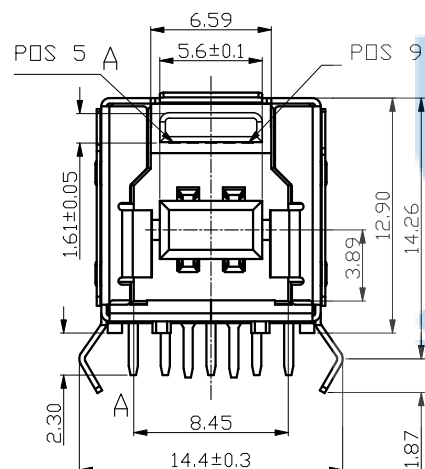

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PWDG.NO: 0886-1	DR. TSP	NAME: USB 3.0 B母 90度 DIP 两脚插 弯脚 平口 铜壳 LCP蓝胶 L=18.30 盒装	PJ. NO.: 127-272-090010-K4G
APPD. JM_Zheng	CHKD. LYX	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

Packing Operation Standard

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

包装作业图示及说明 (PACKING OPERATION DIAGRAM & INSTRUCTION)

一:

- 1) 将成品一一放入包装盘内, 依同一方向放入.
- 2) 包装时, 依图所示.
- 3) 一个包装盘放置100个成品. 盖上托盘上盖.

4) 依次往上叠放8盘, 产品方向保持一致, 底部放一块硬纸板, 用PE膜将托盘两边缠绕再在托盘中间缠绕成#字形, (缠绕3~5圈. 用力要适当)

另外一扎叠放7盘, 底部放一块硬纸板, 用PE膜将托盘两边缠绕再在托盘中间缠绕成#字形, (缠绕3~5圈. 用力要适当)

二:

- 1) 将2扎托盘叠放入纸箱内.
- 2) 箱内放2包干燥剂
- 3) 每箱装1500PCS成品

三:

- 1) 用透明胶将纸箱封实.
- 2) 将标签(按要求打印好的)贴在纸箱侧麦上方.


标签粘贴处

ITEM NO:
Q'TY: PCS
N.W: KGS
G.W: KGS
MEAS: 33X23.5X29CM


C/NO:
MADE IN CHINA

注 (REMARK)

- 1) 装不满一个外箱的, 用填充物填满未空间或将纸箱割小至刚好装下.
- 2) 在搬运过程中要轻拿轻放.
- 3) 在运输中不可堆放过多, 不可有重压现象.

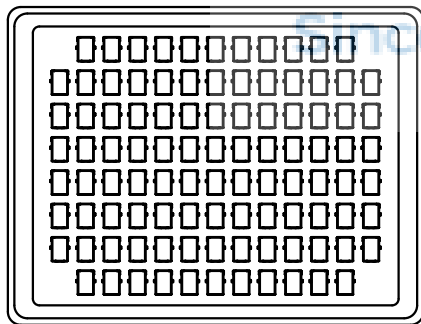

产品摆放示意图

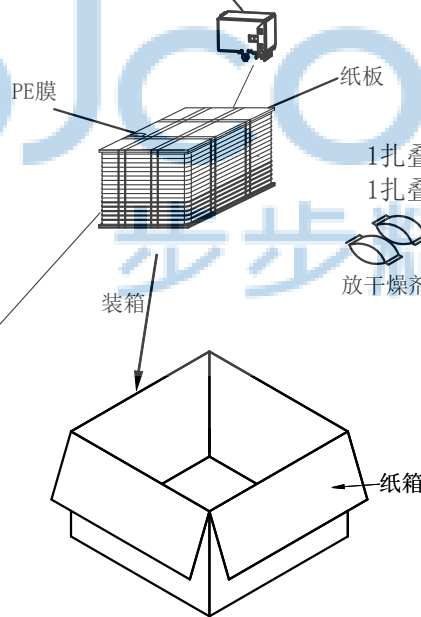

每箱数量	净重	毛重
1.5K套/箱	7.19KG	9.27KG



产品	USB 3.0 BF	90°	1500
透明胶		W=47	若干
PE膜		W=68	若干
干燥剂		1.2g/包	2包
纸板		314*224*3	2
托盘上盖		314*224*17	15
托盘		314*224*17	15
纸箱		330*235*290	1
品名		规格(mm)	用量(PCS)

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0886-1

APPD. JM_Zheng

CHKD. LYX

DR. TSP

NAME: USB 3.0 B母 90度 DIP 两脚插 弯脚 平口 铜壳 LCP蓝胶 L=18.30 盒装

PJ. NO.: 127-272-090010-K4G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2