

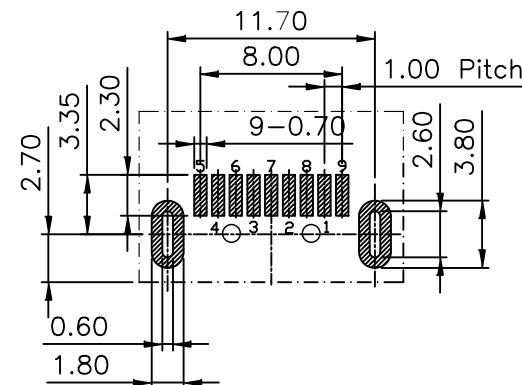
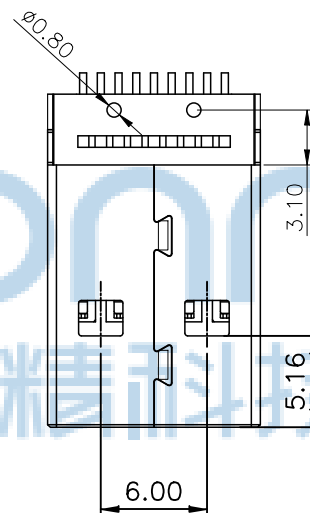
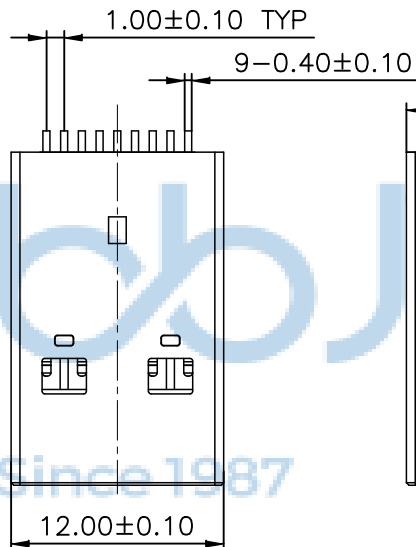


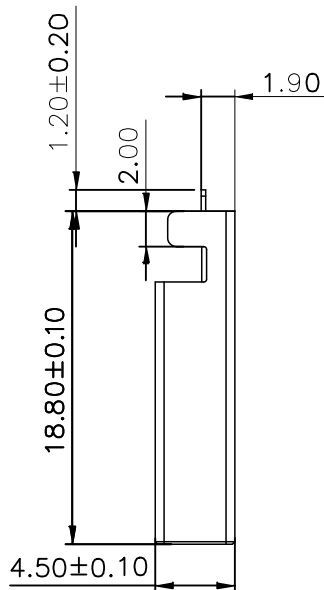


| REV | ECN NO | CONTENT         | DATE | ENGINEER |
|-----|--------|-----------------|------|----------|
| A0  |        | INITIAL RELEASE | /    | SGF      |

NOTE:

- ELECTRICAL CHARACTERISTICS;
  - CONTACT RESISTANCE: 30mΩ MAXIMUM
  - CONTACT CURRENT RATING: 1.5 AMPERES
  - DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
  - INSULATION RESISTANCE 1000 MEGOHMS MIN
  - OPERATING TEMPERATURE: -40°C ~ 85°C
- MECHANICAL CHARACTERISTICS;
  - MATING FORCE: 3.57kg MAX
  - UNMATING FORCE: 1.02kg MIN
  - DURABILITY: MANDATORY: 5,000 CYCLES

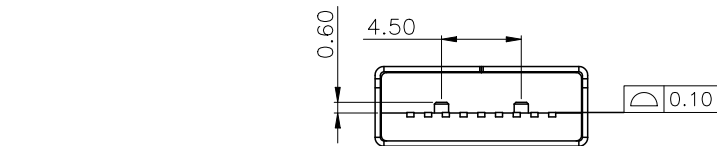

RECOMMENDED P.C.B LAYOUT

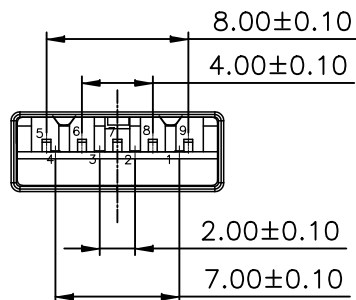

| Pin NUMBER | SIGNAL NAME |
|------------|-------------|
| 1          | VBUS        |
| 2          | D-          |
| 3          | D+          |
| 4          | GND         |
| 5          | StdA_SSRX-  |
| 6          | StdA_SSRX+  |
| 7          | GND_DRAIN   |
| 8          | StdA_SSTX-  |
| 9          | StdA_SSTX+  |
| Shell      | Shield      |



| ITEM | DESCRIPTION | Q'TY | MAT'L                 | REMARK                  |
|------|-------------|------|-----------------------|-------------------------|
| 1    | INSULATION  | 1    | HSG: LCP              | UL94-V0                 |
| 2    | SHELL       | 1    | TML: C5191R-EH T=0.20 | Ni50u", Sn80u" Au1~30u" |
|      |             | 1    | SPCC T=0.30           | Cu100u", Ni120u"        |

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co., Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
PRIOR WRITTEN PERMISSION.

PDWG NO: 0886-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3"  
.XX: ±0.25 .X': ±2"  
.XXX: ±0.13 .X': ±1"

NAME: USB 3.0 公头 90度 L=18.8 沉板 2.59  
直脚 端子 SMT 带柱 LCP 黑胶 铁壳 编带

APPD JM\_Zheng


PJ NO: 127-171-090002-K4G

CHKD LYX


SIZE: A4 DRW NO:

FINISH: SEE NOTES MAT'L: SEE NOTES


SCALE: N/A REV: A0 UNIT: mm PAGE: 1/2

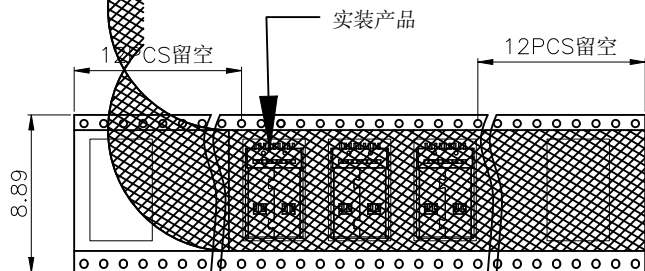


卷料时收料方向: PIN端先卷入




圖一:




圖二:



圖三:




圖五:

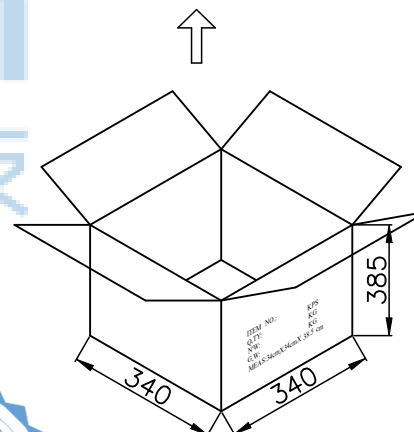

圖四:

34\*34\*38.5CM

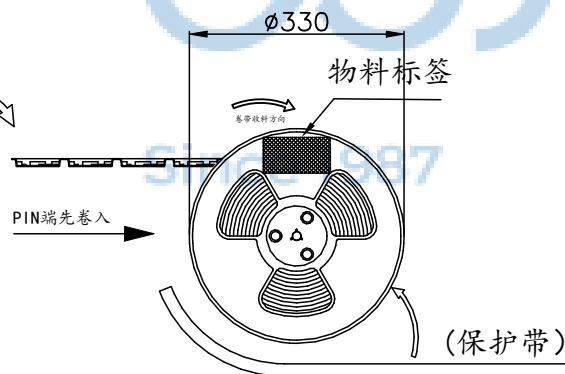

包装说明:

1. 将合格产品放置在卷带内,并用自黏带封装,每卷数量见表格,再将卷带绕在盘内如图一所示。
2. 每一整卷包装完畢後,需在外圈加裝黑色保護帶,并貼上標籤(見圖二)。
3. 再將卷盤疊起,并放入紙箱內(如圖三)。
4. 每箱產品數量見表格(如圖四)。
5. 最後對紙箱進行“工”型封裝(如圖五)。
6. 紙箱封裝OK後,在外箱上貼上標籤,按要求註明毛重、淨重、品名等。



| 包装方式 | 每盘数量<br>(PCS/盘) | 盘数<br>(盘/箱) | 每箱数量<br>(PCS/箱) | 净重N. W<br>(Kg/箱) | 毛重G. W<br>(Kg/箱) |
|------|-----------------|-------------|-----------------|------------------|------------------|
| 卷装   | 600             | 10          | 6000            | ----             | ----             |

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
PRIOR WRITTEN PERMISSION.

PDWG NO: 0886-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'  
.XX: ±0.25 .X': ±2'  
.XXX: ±0.13 .XX': ±1'

APPD JM\_Zheng  
CHKD LYX

DR

NAME: USB 3.0 公头 90度 L=18.8 沉板2.59  
直脚 端子SMT 带柱 LCP黑胶 铁壳 编带

PJ NO: 127-171-090002-K4G  
SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES  
SCALE:N/A REV:AO UNIT:mm PAGE:2/2