


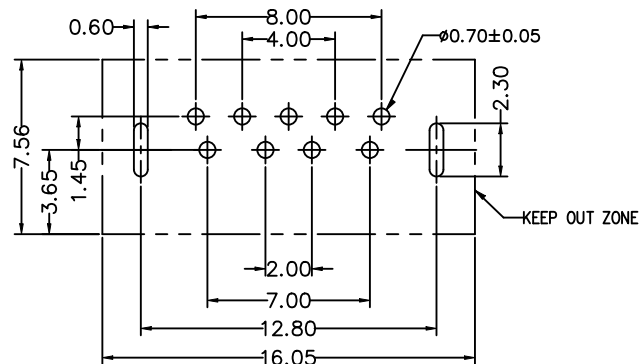
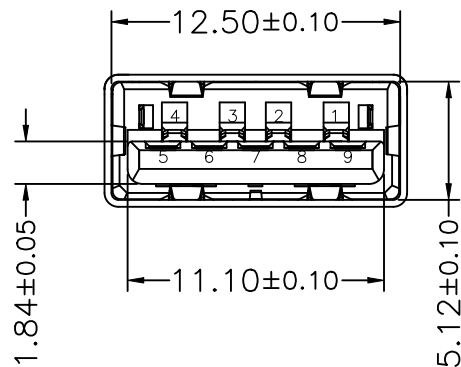


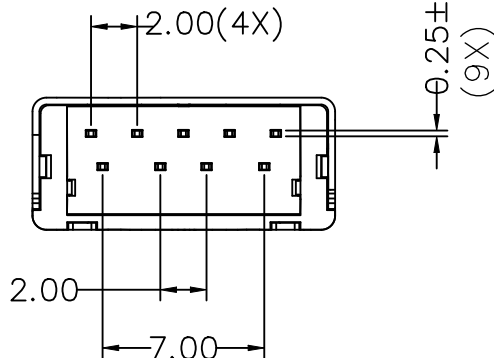

Recommended PCB Layout
PCB Thickness=1.8±0.1mm

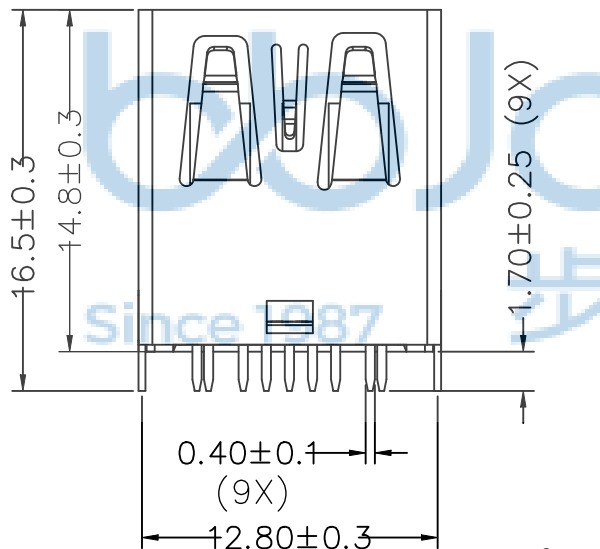

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

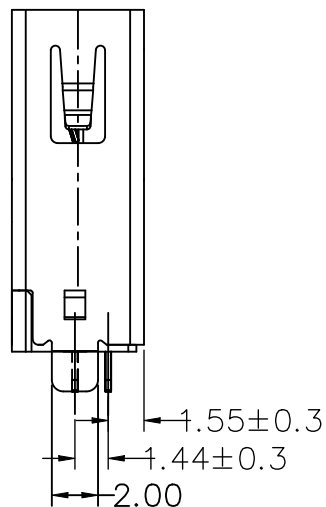

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTE:

- MATERIAL:
 - INSULATOR:HIGH TEMPERATURE PLASTIC LCP
 - CONTACT:BRONZE
 - SHELL:BRASS
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE:30mΩ MAX
 - CONTACT CURRENT RATING:1.5A
 - DIELECTRIC WITHSTANDING VOLTAGE:100 V R. M. S.
 - INSULATION RESISTANCE 100 MΩ MIN
 - OPERATING TEMPERATURE:-40° C ~ 85° C
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE:3.57kgf MAX
 - UNMATING FORCE:1.02kgf MIN
 - DURABILITY:MANDATORY:1,500 CYCLES
- PLATING
 - TERMINAL:
 - 50u" MIN NICKEL
 - 80u"MIN Tin ON SOLDER AREA
 - Au G/F ON CONTACT AREA
 - SHELL:50u"MIN. NICKEL


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME:USB 3.0 A母 180度 DIP 两脚插 直脚 外壳脚长1.7 平口 不锈钢外壳 LCP蓝胶 H=14.80 盒装	
.X: ±0.38	.X*: ±3"	APPD. JM_Zheng		PJ. NO.: 127-275-090023-K4G	
.XX: ±0.25	.X*: ±2"	CHKD. LYX		SIZE: A4 DRW NO.:	
.XXX: ±0.13	.XX*: ±1"	DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0886-1				SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

包装作业图示及说明 (PACKING OPERATION DIAGRAM & INSTRUCTION)

一:

- 1) 将成品一一放入包装盘内, 依同一方向放入.
- 2) 包装时, 依图所示.
- 3) 一个吸塑盘放置100个成品.


4) 依次往上叠放15盘, 产品方向保持一致, 上下各放一块硬纸板, 用PE膜将托盘两边缠绕(PE鲜膜距托盘边约50mm) 再在托盘中间缠绕成#字形为一扎, (缠绕3~5圈. 用力要适当)

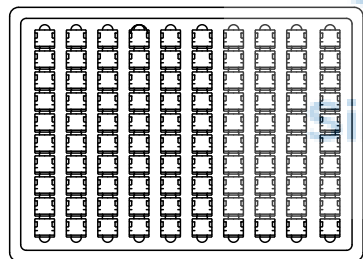

吸塑盒规格: 315mm*225mm*9mm


二:

- 1) 将2扎托盘按上下顺序放入纸箱中.
- 2) 纸箱内放2包干燥剂
- 3) 每箱装3000PCS成品

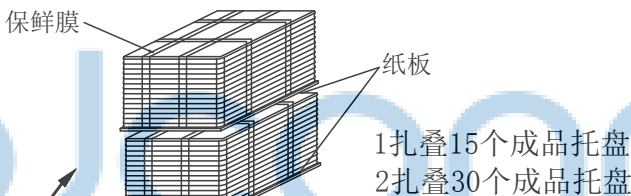

1扎叠15个成品托盘
2扎叠30个成品托盘


装箱




纸箱

三:

- 1) 用透明胶将纸箱封实.
- 2) 将标签(按要求打印好的)贴在纸箱侧麦上方.



标签粘贴处

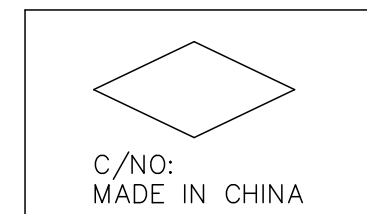

备注 (REMARK)

- 1) 装不满一个外箱的, 用填充物填满未空间或将纸箱割小至刚好装下.
- 2) 在搬运过程中要轻拿轻放.
- 3) 在运输中不可堆放过多, 不可有重压现象.
- 4) 跌落测试条件: 成品箱子从1.0米高自由落体: (三棱六面一角)
检验项目: 1. 产品不可跑出包装盘凹槽.
2. 产品不可有摔伤, 变形.
3. 外箱及内包装材料不可严重破损.



产品	SMT&DIP	3000
透明胶	W=47	若干
PE膜	W=68	若干
干燥剂	1.2g/包	2包
纸板	314*224*3	2
托盘	315*225*9	30
纸箱	330*235*290	1
品名	规格(mm)	用量(PCS)

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0886-1		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		NAME:USB 3.0 A母 180度 DIP 两脚插 直脚 外壳脚长1.7 平口 不锈钢外壳 LCP蓝胶 H=14.80 盒装	
		APPD. JM_Zheng			PJ. NO.: 127-275-090023-K4G		
		CHKD. LYX			SIZE: A4 DRW NO.:		
		DR. TSP		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0		UNIT: mm	PAGE: 2/2