

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	LYL

NOTE:

1.MATERIAL:

- 1.1 INSULATOR:PBT & PA9T &LCP
 - 1.2 CONTACT:COPPER ALLOY C5191
 - 1.3 SHELL:SUS201&SPCC
- 2.ELECTRICAL CHARACTERISTICS;
- 2.1 CONTACTRESISTANCE:30mΩ MAXIMUM
 - 2.2 CONTACT CURRENT RATING:1.5A
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R.M.S.
 - 2.4 INSULATION RESISTANCE 100 MEGOHMS MIN
 - 2.5 OPERATING TEMPERATURE:-20°C ~ 60°C






3.PLATING

3.1 TERMINAL:

50u" MIN NICKEL ALL OVER
100u"MIN Tin ON SOLDER AREA
(1~30)u"Au ON CONTACT AREA

3.2 SHELL:80u"MIN.NICEL ALL OVER

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

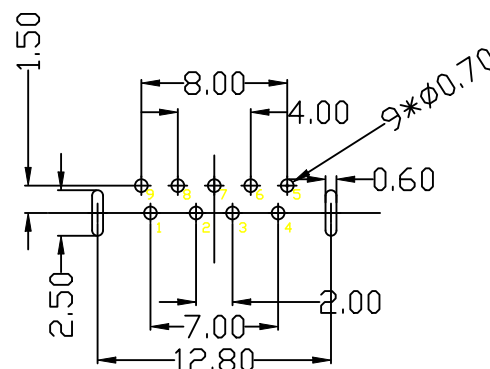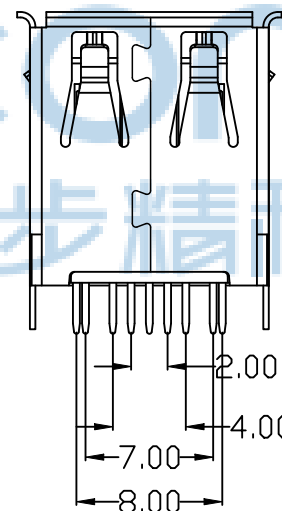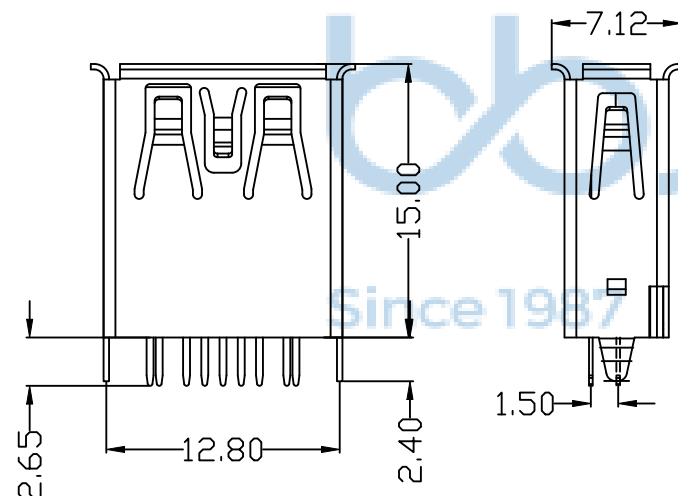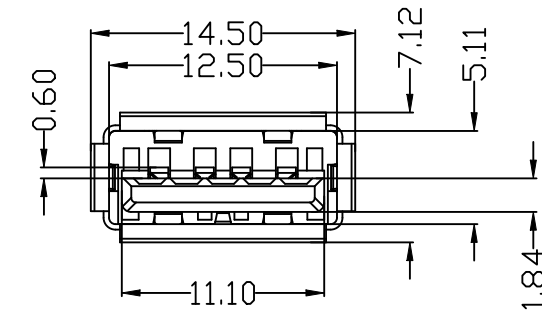

P.C.B LAYOUT
TOL:±0.05



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0471-1



深圳市步步精科技有限公司

.X: ±0.38 X*: ±3*
.XX: ±0.25 .X*: ±2*
.XXX: ±0.13 .XX*: ±1*

NAME: USB 3.0 AF 180度 H=15.0 直脚 直插 端子DIP 卷边 LCP蓝胶 铁壳

APPD. JM_Zheng

PJ. NO.: UB.03.11-31-W003




CHKD. LYX

SIZE: A4 DRW NO.:

DR. LYL

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

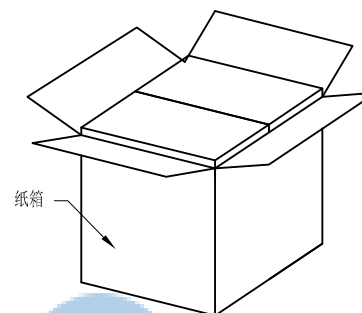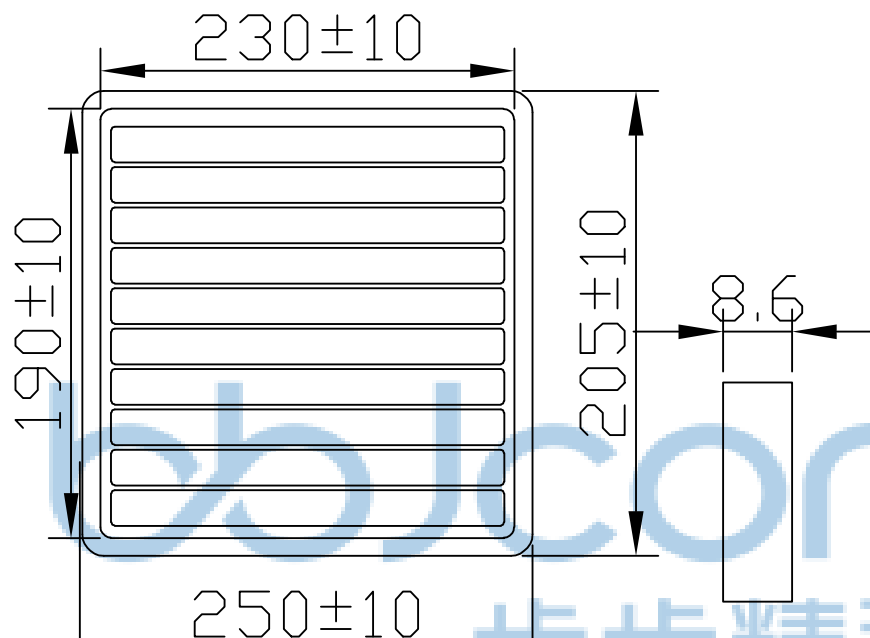

纸箱规格: 350*210*290



- 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: USB 3.0 AF 180度 H=15.0 直脚 直插 端子DIP 卷边 LCP蓝胶 铁壳	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		PJ. NO.: UB.03.11-31-W003	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0471-1		DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	