

REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	LQ

NOTE:

1. MATERIAL:

- 1.1 INSULATOR:PBT & PA9T &LCP
- 1.2 CONTACT:COPPER ALLOY
- 1.3 SHELL:BRASS&SPCC&SUS201

2. ELECTRICAL CHARACTERISTICS;

- 2.1 CONTACTRESISTANCE:40mΩ MAXIMUM
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R. M. S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS MIN
- 2.5 OPERATING TEMPEROTURE:-20° C ~ 60° C

3. PLATING

3.1 TERMINAL:

- 50u" MIN NICKEL ALL OVER
100u"MIN Tin ON SOLDER AREA
(1~30)u"Au ON CONTACT AREA

3.2 SHELL:80u"MIN.NICEL ALL OVER




Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3' .XX: ±0.25 .X'': ±2' .XXX: ±0.13 .X'X': ±1'		NAME: USB 3.0 AF 180度 直脚直插 H=13.75 端子DIP 平口 LCP蓝胶 不锈钢外壳 端子镀金1u	
APPD	JM_Zheng		PJ NO: UB.03.12-33-W010
CHKD	LYX	SIZE:A4	DRW NO:
PDWG NO: 0471-1		FINISH:SEE NOTES	MAT'L:SEE NOTES
DR	LQ	SCALE:N/A	REV: A0 UNIT:mm PAGE: 1/2

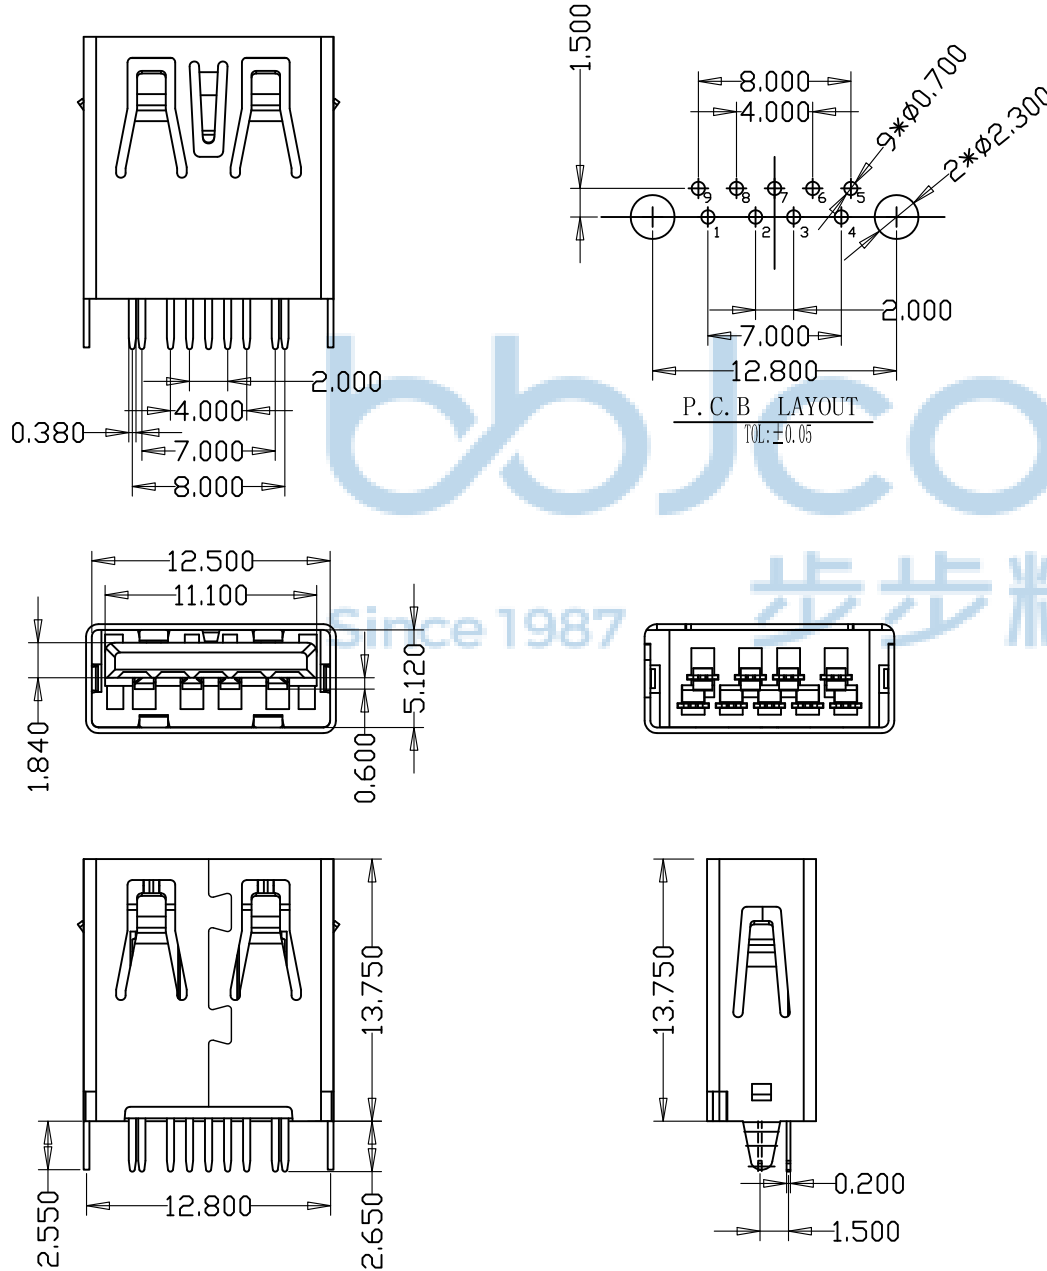


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LQ




bbJconn
Since 1987 步步精科技



产品




上盖



下盖

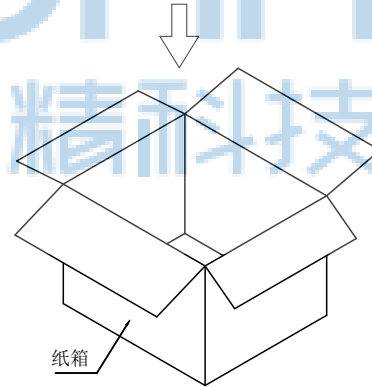

纸箱

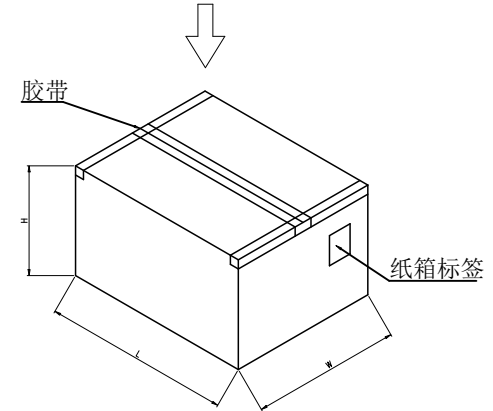

纸箱规格: L350*W210*H290

1、包装要求:

- 1.1 每盒吸塑盒包装100pcs ;
- 1.2 每20盘放一箱,共计2000PCS;
- 1.3 纸箱外贴上标签。



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0471-1

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: USB 3.0 AF 180度 直脚直插 H=13.75 端子DIP 平口 LCP蓝胶 不锈钢外壳 端子镀金Lu
APPD JM_Zheng	PJ NO: UB.03.12-33-W010	
CHKD LYX	SIZE:A4	DRW NO:
DR LQ	FINISH:SEE NOTES	MAT'L:SEE NOTES
	SCALE:N/A	REV: A0
	UNIT:mm	PAGE: 2/2