

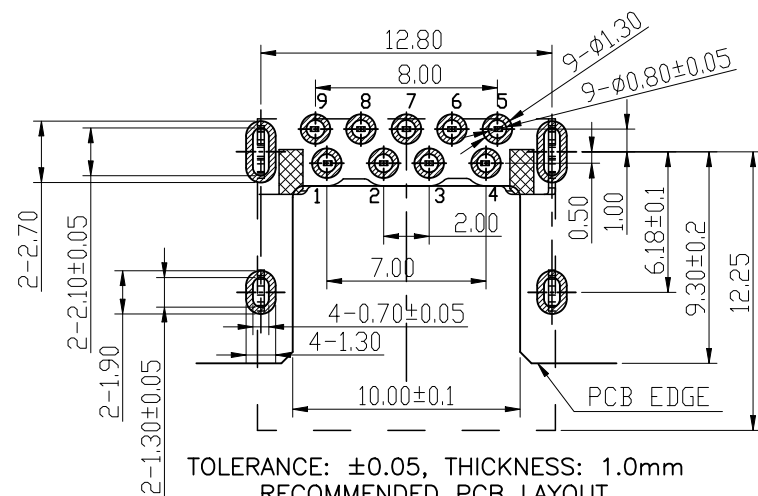
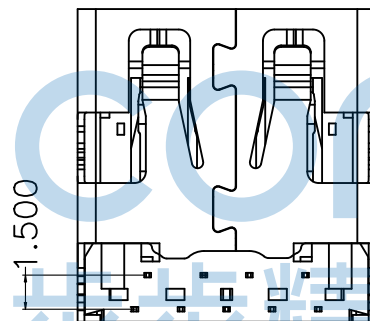
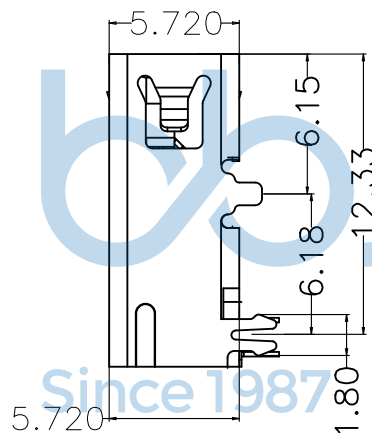


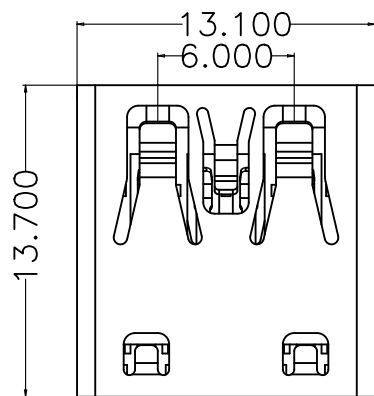

TOLERANCE: ± 0.05 , THICKNESS: 1.0mm

RECOMMENDED PCB LAYOUT

(TOP VIEW)

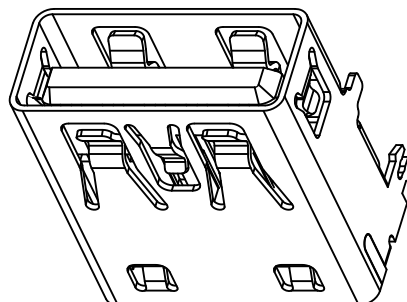


KEEP OUT AREA



Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	StdA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	StdA_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	StdA_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	FRIST

3	外壳	SUS//BRASS	NICKEL PLATED
2	端子	COPPER ALLOY	GOLD/TIN PLATED
1	胶芯	HIGH TEMPERATURE PLASTIC	UL94V-0
NO.	PART NAME	MATERIAL	DESCRIPTION

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

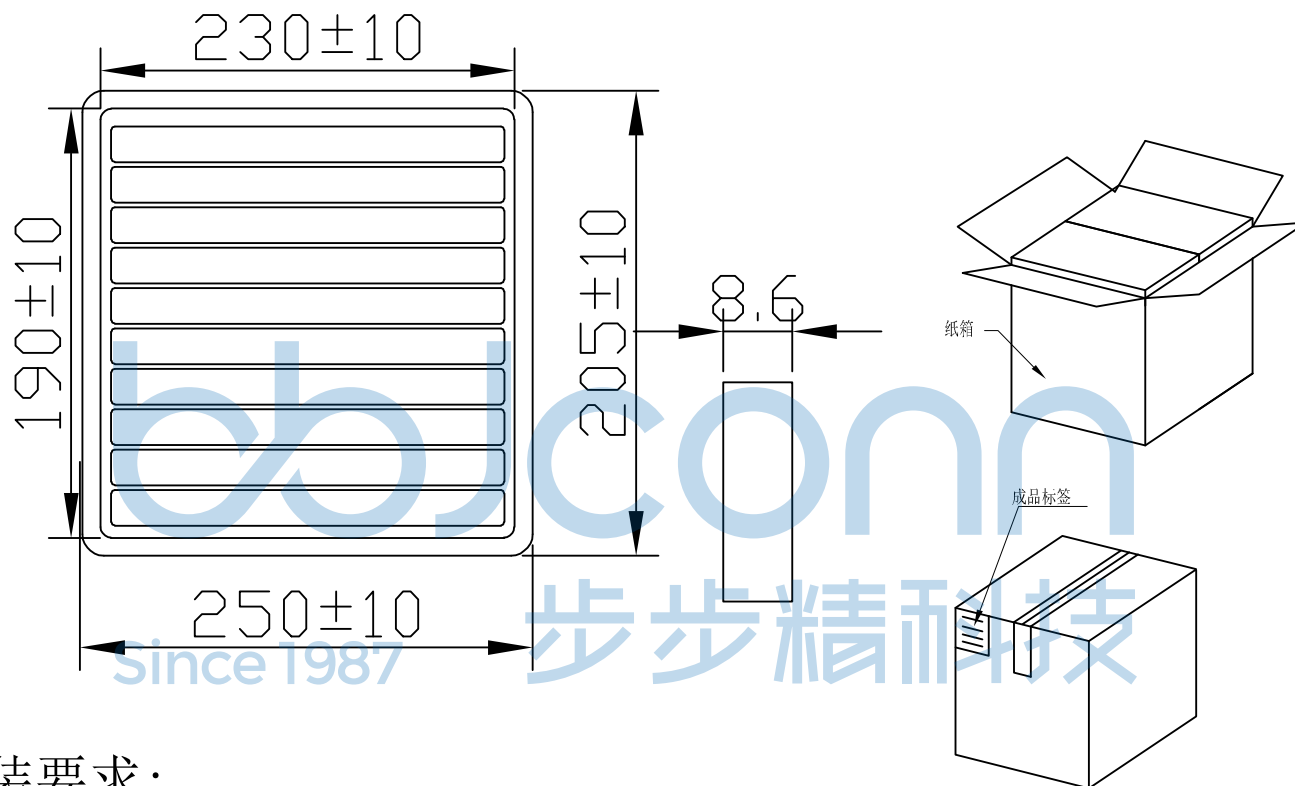

纸箱规格: 350*210*290

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*	
NAME: USB 3.0 AF 90度 四脚插 端子DIP L=13.70 平口 LCP蓝胶 不锈钢外壳		P.J. NO.: UB.03.12-33-W012	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES	
PDWG.NO: 0471-1		MAT'L.: SEE NOTES	
DR. TSP		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	