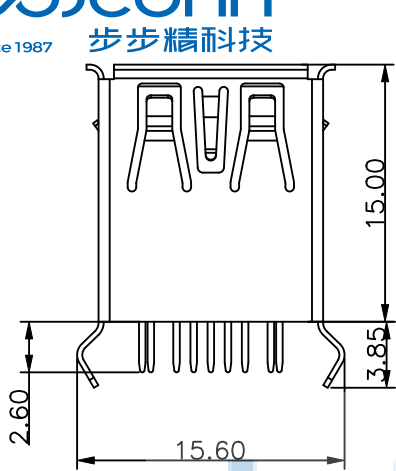


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

NOTE:

1. MATERIAL:

- 1.1 INSULATOR:PBT & PA9T &LCP
- 1.2 CONTACT:COPPER ALLOY
- 1.3 SHELL:BRASS&SPCC&SUS201

2. ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACTRESISTANCE:40mΩ MAXIMUM
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R.M.S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS MIN
- 2.5 OPERATING TEMPEROTURE:-20° C ~ 60° C

3. PLATING

3.1 TERMINAL:




- 50u" MIN NICKEL ALL OVER
- 100u"MIN Tin ON SOLDER AREA
- (1~30)u"Au ON CONTACT AREA

3.2 SHELL:80u"MIN.NICEL ALL OVER

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0471-1

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' X'': ±2' X'': ±1'
APPD. JM_Zheng CHKD. LYX DR. LHC	NAME: USB 3.0 AF 180度 H=15.0 弯脚 LCP 蓝胶 卷边 不锈钢外壳 DIP PJ. NO.:UB. 04. 11-33-3001 SIZE: A4 DRW NO.: FINISH: SEE NOTES SCALE: N/A REV.: A3
23/05'02 23/05'02 23/05'02	MAT'L.: SEE NOTES UNIT: mm PAGE: 1/2

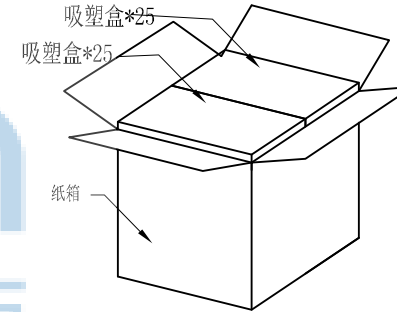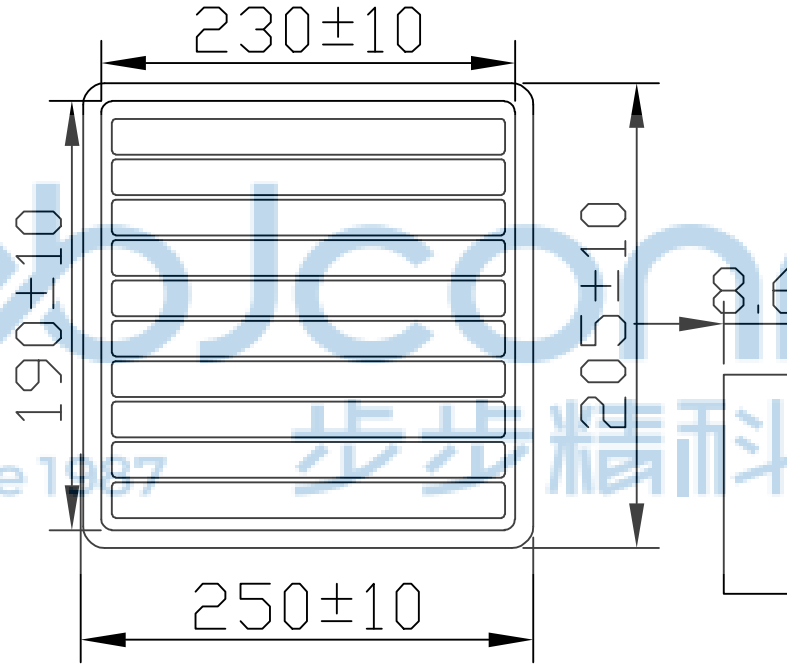

纸箱规格: 350*210*290



1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
 - 1.2 每50盘放一箱, 共计5000PCS;
 - 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: USB 3.0 AF 180度 H=15.0 弯脚 LCP 蓝胶 卷边 不锈钢外壳 DIP	
APPD. JM_Zheng		PJ. NO.: UB. 04. 11-33-3001	
CHKD. LYX		SIZE: A4 DRW NO.:	
DR. WYY		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0471-1		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	