

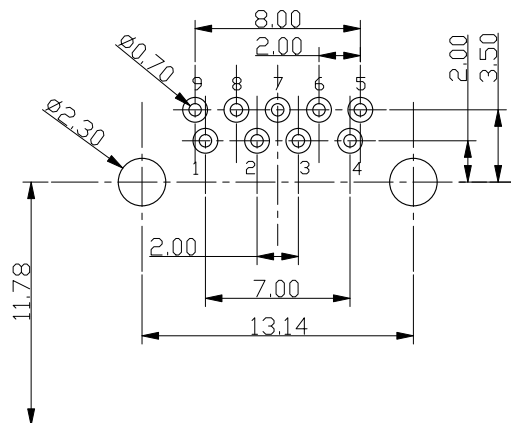
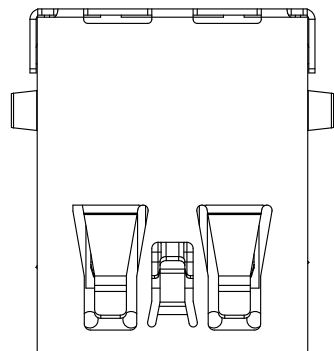
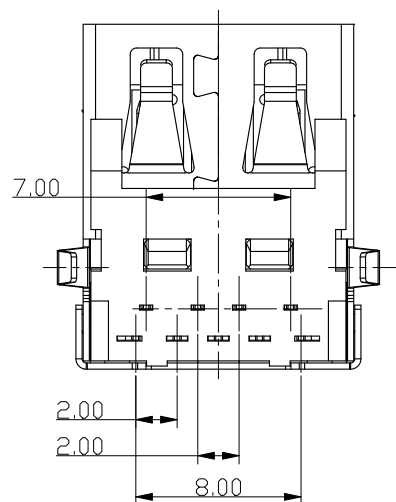



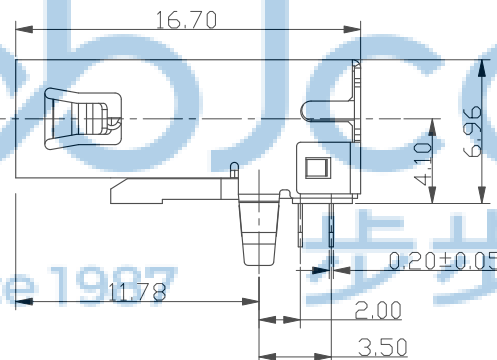

RECOMMENDED PCBA LAYOUT
(TOLERANCE ± 0.05)

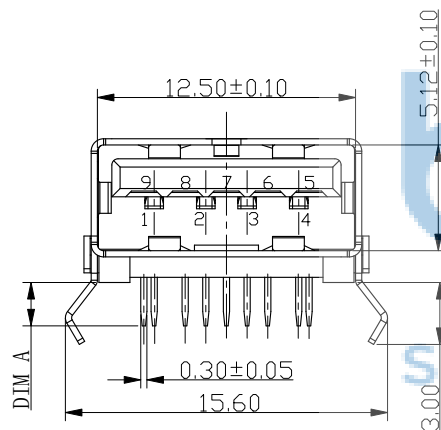

NOTE:




- MATERIAL:
 - INSULATOR: HIGH TEMPERATURE PLASTIC
 - CONTACT: BRONZE
 - SHELL: BRASS/SUS201
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ MAX
 - CONTACT CURRENT RATING: 1.5A
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 V R.M.S.
 - INSULATION RESISTANCE 100 MΩ MIN
 - OPERATING TEMPERATURE: -40° C ~ 85° C
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 3.57kgf MAX
 - UNMATING FORCE: 1.02kgf MIN
 - DURABILITY: MANDATORY: 1,500 CYCLES
- PLATING
 - TERMINAL:
 - 50u" MIN NICKEL ALL OVER
 - 100u" MIN Tin ON SOLDER AREA
 - (1~30)u" Au ON CONTACT AREA
 - SHELL: 50u" MIN. NICKEL ALL OVER

DIMA
2.10
2.30



Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell Shield	

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG. NO: 0471-1	DR. TSP	NAME: USB 3.0 AF 90度 L=16.70 H=6.96 后两脚插 弯脚 端子DIP 端子脚长2.10 平口 LCP黑胶 不锈钢外壳	P.J. NO.: 127-272-090019-Y4G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT' L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1
APPD. JM_Zheng	CHKD. LYX		

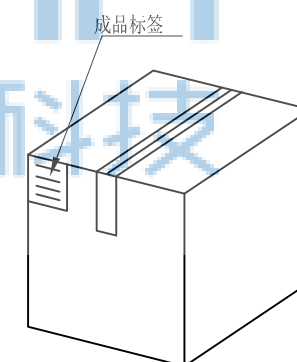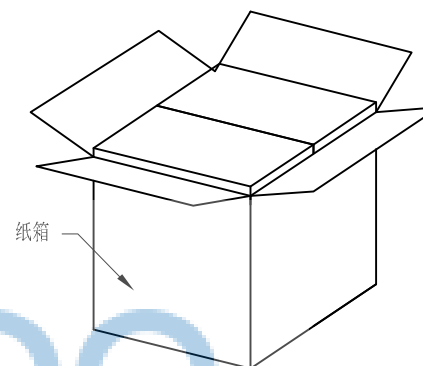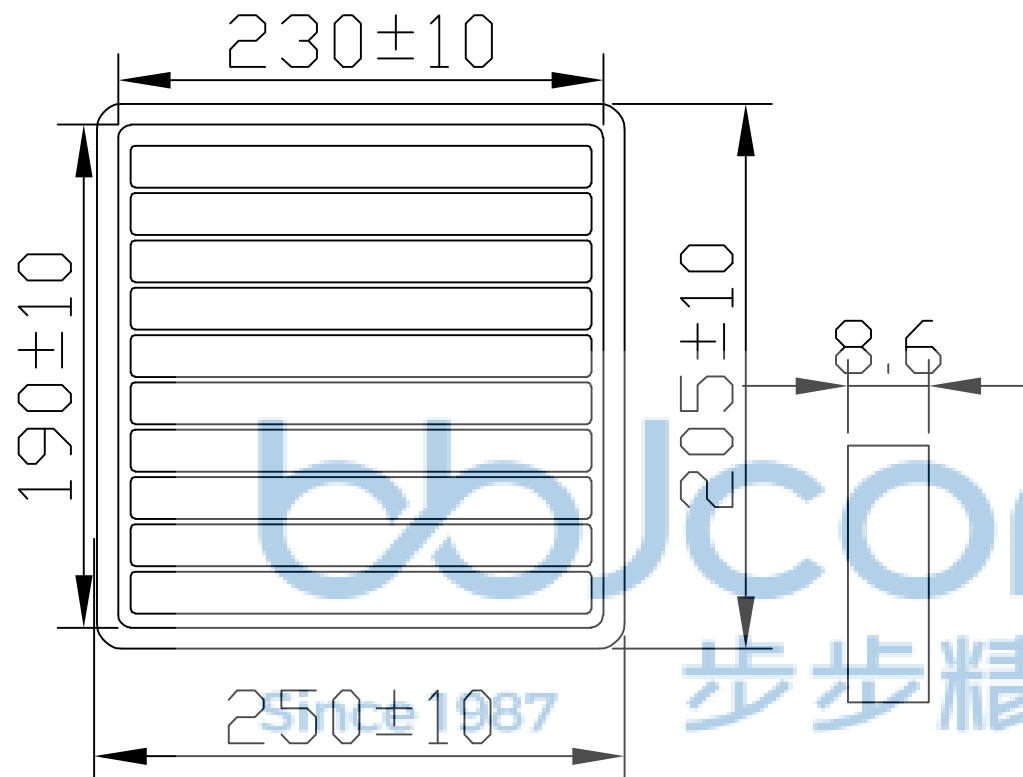

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装**100PCS**;
- 1.2 每**20**盘放一箱, 共计**2000PCS**;
- 1.3 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"	
APPD. JM_Zheng		NAME: USB 3.0 AF 90度 L=16.70 H=6.96 后两脚插 弯脚 端子DIP 端子脚长2.10 平口 LCP黑胶 不锈钢外壳	
CHKD. LYX		PJ. NO.: 127-272-090019-Y4G SIZE: A4 DRW NO.:	
DR. TSP		FINISH: SEE NOTES MAT'L: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1	