

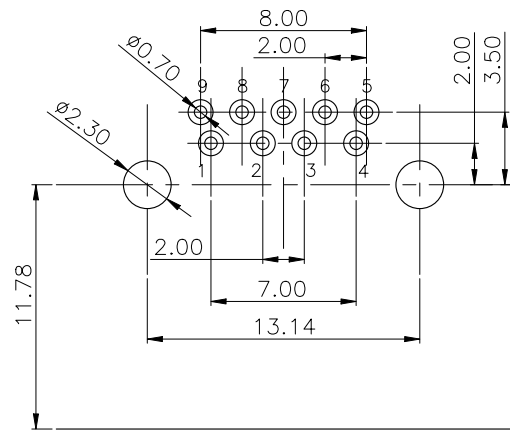
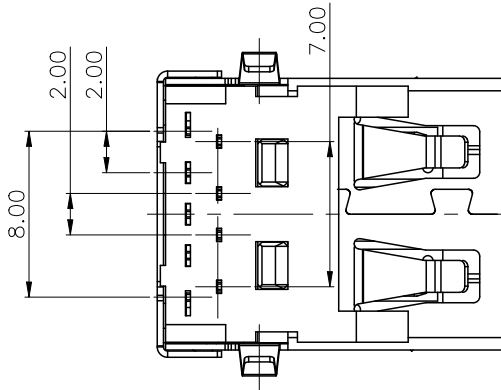
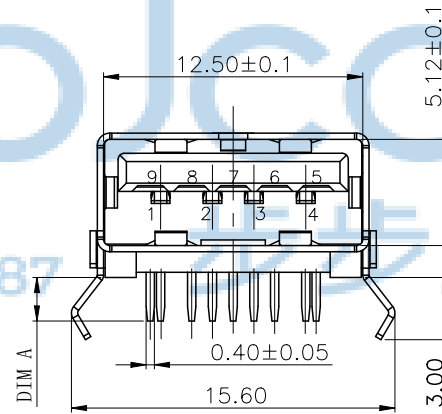


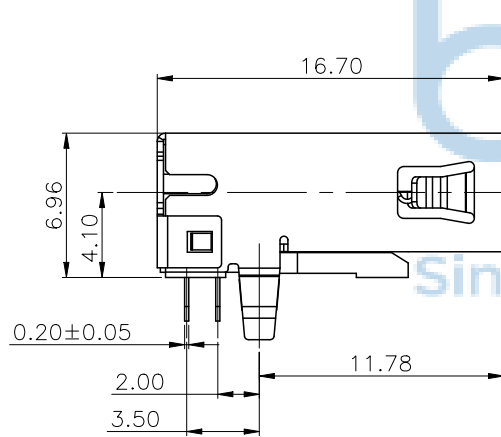

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

NOTE:
1. MATERIAL:
1.1 INSULATOR:HIGH TEMPERATURE PLASTIC
1.2 CONTACT:BRONZE
1.3 SHELL:SUS201
2. ELECTRICAL CHARACTERISTICS:
2.1 CONTACT RESISTANCE:30mΩ MAX
2.2 CONTACT CURRENT RATING:1.5A
2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R. M. S.
2.4 INSULATION RESISTANCE 100 MΩ MIN
2.5 OPERATING TEMPERATURE:-40° C ~ 85° C
3. MECHANICAL CHARACTERISTICS:
3.1 MATING FORCE:3.57kgf MAX
3.2 UNMATING FORCE:1.02kgf MIN
3.3 DURABILITY:MANDATORY:1,500 CYCLES
4. PLATING
4.1 TERMINAL:
50u" MIN NICKEL ALL OVER
100u"MIN Tin ON SOLDER AREA
(1~30)u"Au ON CONTACT AREA
4.2 SHELL:50u"MIN. NICEL ALL OVER

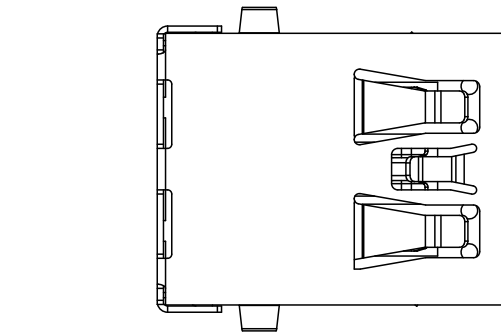

RECOMMENDED PCBA LAYOUT
(TOLERANCE+±0.05)



DIMA
2.10
2.30
2.50

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: USB 3.0 AF 90度 L=16.70 H=6.96 后两脚弯插 端子DIP脚 长2.5 平口 LCP蓝胶 不锈钢外壳 耐高温通孔回流焊 盒装	
APPD	JM_Zheng	PJ NO: 127-272-090023-Y4G	
CHKD	LYX	SIZE:A4 DRW NO:	
PDWG NO: 0471-1		FINISH:SEE NOTES MAT'L:SEE NOTES	
DR	SGF	SCALE:N/A REV:A0 UNIT:mm PAGE:1/2	


包装作业图示及说明

(PACKING OPERATION DIAGRAM & INSTRUCTION)


- 1: 将成品依次入包装盘内, 依同一个方向放入。
- 2: 包装时, 以图所示。
- 3: 一个包装盘放置100个成品。
- 4: 依次往上叠放20盘, 产品方向保持一致, 上下各放一块硬纸板, 用PE膜将托盘两边缠绕在托盘中间缠绕成#字行 (缠绕3-5圈, 用力要适当)




装盘



- 1: 将一扎托盘放入纸箱中
- 2: 纸箱内放2包干燥剂
- 3: 每箱装2000个成品

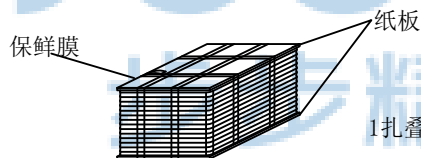

装箱




纸箱




1扎叠20个成品托盘

- 1: 用透明胶将纸箱封实
- 2: 将标签贴在纸箱侧上方



标签粘贴处



备 注

(RFMARK)

- 1: 装不满一个外箱的, 用填充物填满未装空间或将纸箱割小至刚好装下
- 2: 在搬运过程中要轻拿轻放
- 3: 在运输过程中不可堆放过多, 不可有重压现象。



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0471-1

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR SGF

NAME:
USB 3.0 AF 90度 L=16.70 H=6.96 后两脚弯插 端子DIP脚
长2.5 平口 LCP蓝胶 不锈钢外壳 耐高温通孔回流焊 盒装

PJ NO: 127-272-090023-Y4G

SIZE:A4 DRW NO:

FINISH:SEE NOTES

SCALE:N/A

MAT'L:SEE NOTES

UNIT:mm PAGE:2/2