

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

NOTE:

1. MATERIAL:

- 1.1 INSULATOR:PBT & PA9T &LCP
- 1.2 CONTACT:COPPER ALLOY
- 1.3 SHELL:BRASS&SPCC&SUS201

2. ELECTRICAL CHARACTERISTICS;

- 2.1 CONTACTRESISTANCE:40mΩ MAXIMUM
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R.M.S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS MIN
- 2.5 OPERATING TEMPEROTURE:-20° C ~ 60° C





3. PLATING

3.1 TERMINAL:

- 50u" MIN NICKEL ALL OVER
100u"MIN Tin ON SOLDER AREA
(1~30)u"Au ON CONTACT AREA

3.2 SHELL:80u"MIN.NICEL ALL OVER

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

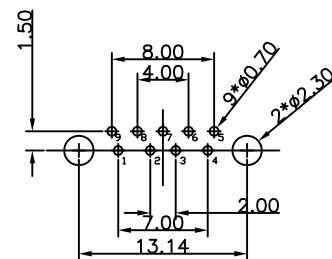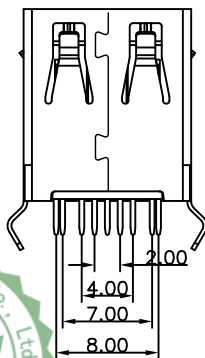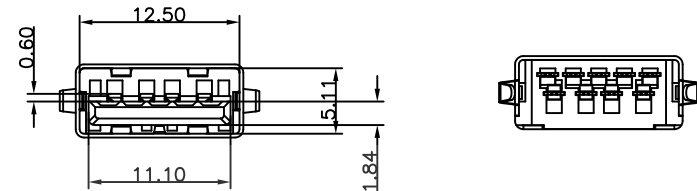

P.C.B LAYOUT
TOL:±0.05




TOLERANCE UNSPECIFIED
.0 ±0.35
.00 ±0.25
.000 ±0.15
X.° ±2.00°
CUSTOMER DRAWING

深圳市步步精科技有限公司



TITLE:

USB3.0 AF 180度 H15.0 弯脚 LCP蓝胶 平口 不锈钢 DIP

DRAWN/ DATE	设计 LYX	SIZE:A4	UNIT:MM.	PART.NO:	127-275-090011-Y4G
CHECKED/ DATE	审核 HMY	SCALE: 1:1	PROJECTION	REV.:	A0
APPROVED/ DATE	核准 LJP	DWG. PATH	0471-1	SHEET:	页码

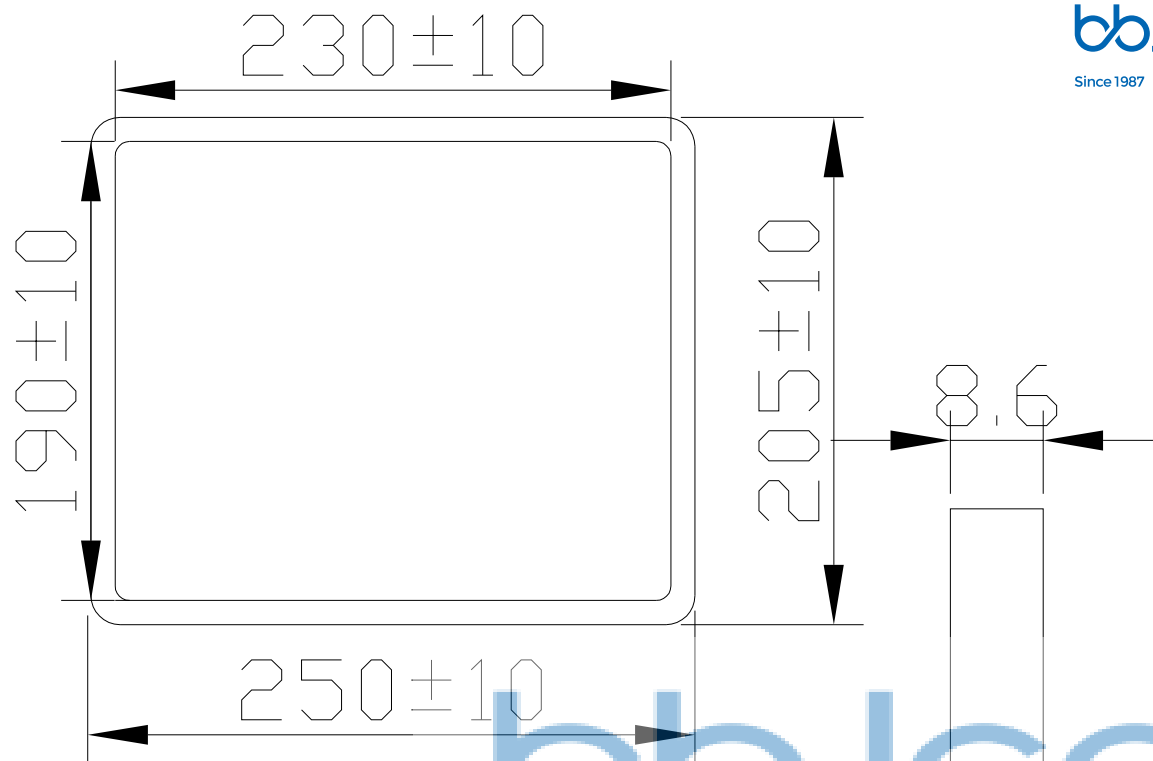

bbJconn
Since 1987 步步精科技

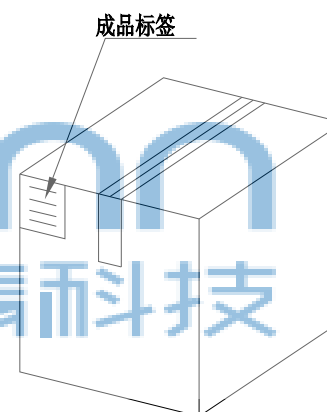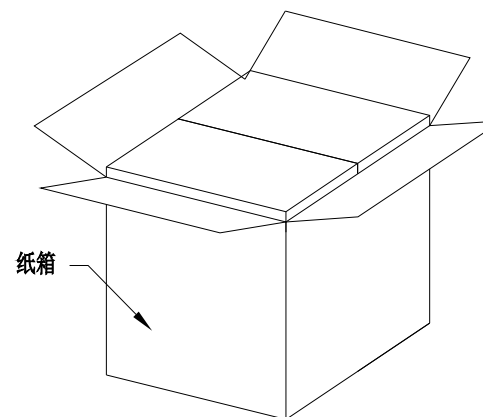

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签



TOLERANCE UNSPECIFIED			 深圳市步步精科技有限公司			
.	0	±0.35				
.	00	±0.25	TITLE:			
.	000	±0.15	USB3.0 AF 180度 H15.0 弯脚 LCP蓝胶 平口 不锈钢 DIP			
X.°		±2.00°	CUSTOMER DRAWING			
DRAWN/ DATE	设计	LYX	SIZE:A4	UNIT:MM.	PART. NO: 127-275-090011-Y4G	
CHECKED/ DATE	审核	HMY	SCALE: 1:1		PROJECTION 	REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH	0471-1		SHEET: 页码