



| REV. | DESCRIPTION | NAME | DATE |
|------|-------------|------|------|
| A    | NEWS ISSUE  |      |      |
|      |             |      |      |

#### NOTES:

##### 1. MATERIAL

CONTACTS: COPPER ALLOY (T=0.20mm)

SHELL: SPCC/C2680 (T=0.30mm)

HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.

##### 2. ELECTRICAL PERFORMANCE

CONTACT RESISTANCE: 30MΩ MAX

CONTACT CURRENT RATING: 1.5 AMPERES

DIELECTRIC WITHSTAND VOLTAGE, 500V R. M. S

INSULATION RESISTANCE: 100MΩ MIN

OPERATING TEMPERATURE: -40° C ~ +85° C.

##### 3. MECHANICAL PERFORMANCE

INSERTION FORCE: 3.5kgf Max

REMOVAL FORCE: 1.02kgf Min

DURABILITY: 5000 CYCLES.

##### 4. PLATING SPECIFICATION:


CONTACTS: GOLD PLATED ON CONTACT AREA, Sn ON SOLDER AREA,  
NICKEL UNDERPLATED.

SHELL: BRIGHT NICKEL PLATING OVER ALL,

NICKEL MUST BE SOLD RABILITY.

HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0 .

RECOMMENDED P.C.B HOLE LAYOUT  
COMPONENT SIDE VIEW (TOLERANCE: +/-0.05)

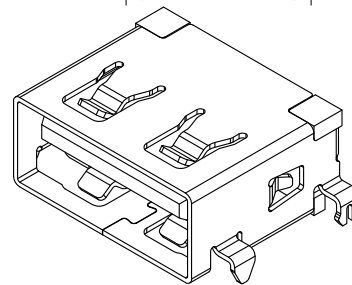

#### TOLERANCE UNSPECIFIED

|                  |        |
|------------------|--------|
| .0               | ±0.35  |
| .00              | ±0.25  |
| .000             | ±0.15  |
| X.°              | ±2.00° |
| CUSTOMER DRAWING |        |



深圳市步步精科技有限公司

#### TITLE:

USB 2.0 AF 90度 短体L=11.05 沉板1.1 平口 LCP黑胶 铜壳 (端子SMT)

| Pin Number | Signal Name |
|------------|-------------|
| 1          | VBUS        |
| 2          | D-          |
| 3          | D+          |
| 4          | GND         |

|                   |    |     |
|-------------------|----|-----|
| DRAWN/<br>DATE    | 设计 | TSP |
| CHECKED/<br>DATE  | 审核 | LYX |
| APPROVED/<br>DATE | 核准 | LJP |


|            |            |           |
|------------|------------|-----------|
| SIZE: A4   | UNIT: MM.  | PART. NO: |
| SCALE: 1:1 | PROJECTION | REV.: 版本  |
| DWG. PATH  | 0100-2     | SHEET: 页码 |



| REV. | DESCRIPTION | NAME | DATE |
|------|-------------|------|------|
| A    | NEWS ISSUE  |      |      |
|      |             |      |      |



一.  
將成品依同一方向放入真空盤內,如圖所示。

At same direction, put product onto the tray. Direction refers to below drawing.

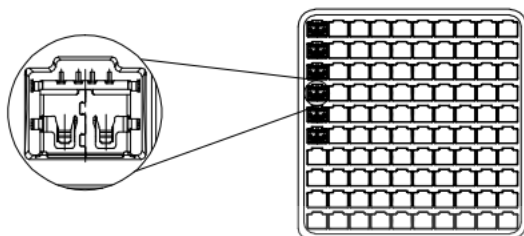

二. VIEW-1

- 1) 一只紙箱可放置之包裝盤(包括上蓋)見下表。  
1) trays per carton, please see next table.
- 2) 最上面一個真空盤作為上蓋,故不放置成品。貼上標籤。  
2) Put cover on the top tray to protect product. Sticking Show.
- 3) 每1個紙箱用的包裝數量詳見下表。  
3) The Q'ty of products per carton please see next tabel.

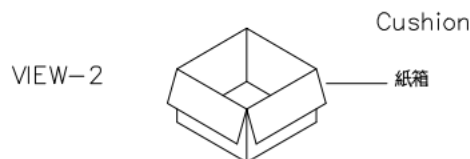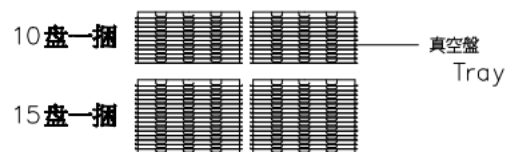

VIEW-2


| 包裝明細表 (The detail of the packing) |         |             |                |          |          |          |
|-----------------------------------|---------|-------------|----------------|----------|----------|----------|
| 包裝容量 (Packing Capacity)           |         |             | 重量 Weight (Kg) |          |          |          |
|                                   | pcs/box | boxs/Carton | Pcs/Box        | N.W./Pcs | N.W./Box | G.W./Box |
|                                   | 100     | 50          | 5000           |          |          |          |

- 4) 將裝滿成品的真空盤用 PE帶捆緊後放在塑膠袋內,裝完後再封箱。
- 4) Bind the trays with PE tape and then put them into the poly bag. Seal the carton with tape.

三.

- 1) 將標籤貼於紙箱側麥上方。  
Stick the needful label On the up-right corner of the side of carton.

標籤黏貼處  
Location of  
Sticking label

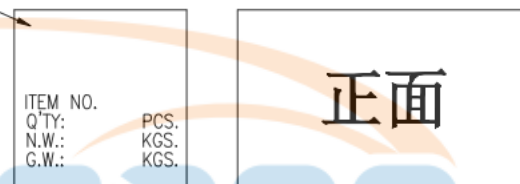

VIEW-3

備註(REMARK)

1. 若有未裝滿之零數箱,必須以緩衝材塞滿。  
The unfilling-carton must be filled with assuagement.
2. 裝滿成品后之外箱,最大堆積箱數:5箱  
About the box fully filled with products, the MAX accumulating quantity of boxes is 5.
3. 如須貼Bar-code,請依Bar-code作業辦法執行  
If barcode label is required, do it according to the related barcode label operation standards.



|                       |        |     |                                                    |    |            |            |
|-----------------------|--------|-----|----------------------------------------------------|----|------------|------------|
| TOLERANCE UNSPECIFIED |        |     | 深圳市步步精科技有限公司                                       |    |            |            |
| .0                    | ±0.35  |     |                                                    |    |            |            |
| .00                   | ±0.25  |     | TITLE:                                             |    |            |            |
| .000                  | ±0.15  |     | USB 2.0 AF 90度 短体L=11.05 沉板1.1 平口 LCP黑胶 铜壳 (端子SMT) |    |            |            |
| X.°                   | ±2.00° |     | DRAWN/                                             | 设计 | TSP        | SIZE:A4    |
| CUSTOMER DRAWING      |        |     | DATE                                               |    |            | UNIT:MM.   |
| CHECKED/              | 审核     | LYX | DATE                                               |    |            | PART. NO:  |
| APPROVED/             | 核准     | LJP | DATE                                               |    |            | SCALE: 1:1 |
|                       |        |     | DWG. PATH                                          |    | PROJECTION | REV.: 版本   |
|                       |        |     |                                                    |    | 0100-2     | SHEET: 页码  |