

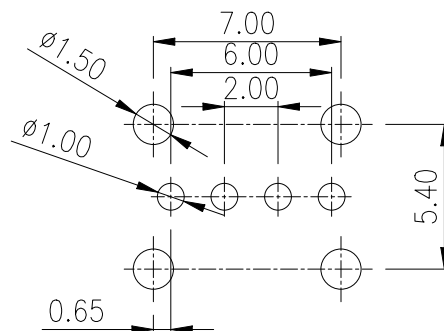
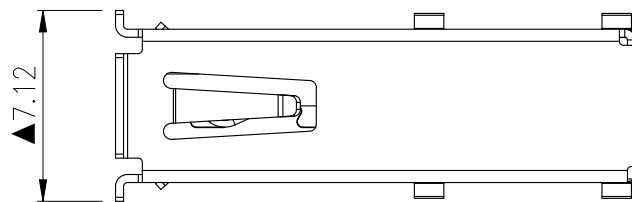
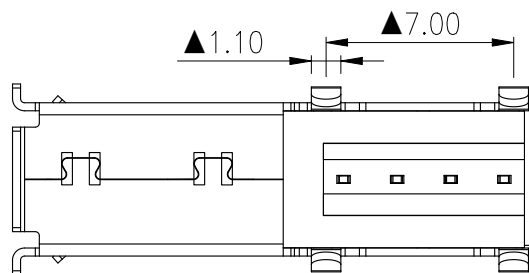
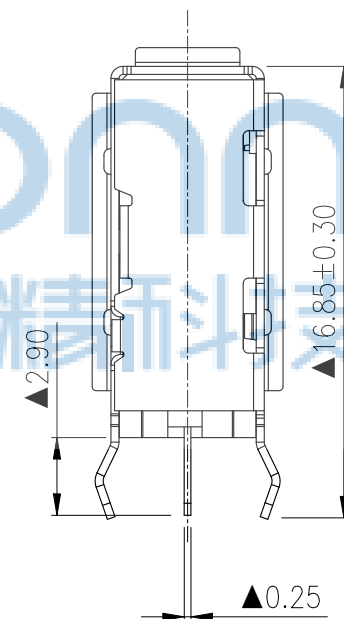


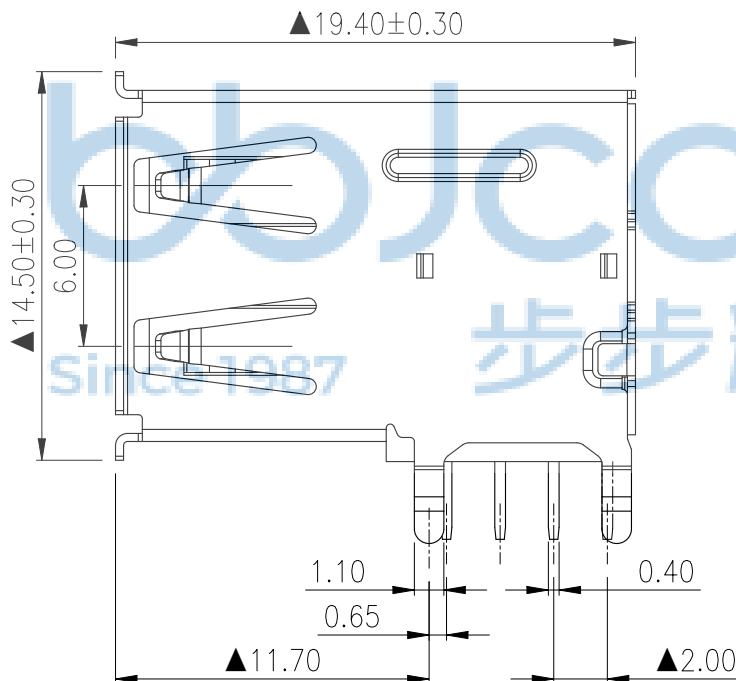

Recommend PCB layout

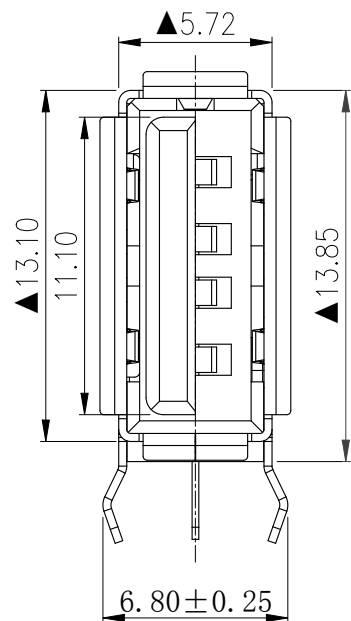

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

注:

1. 机械性能:

插入力:35N Max.

拔出力:10N Min.

储存温度: -20℃~60℃

2. 电性能:

额定电流:1.5A Max.

接触阻抗:30 mΩ Max.

耐高压:500V AC Min.

绝缘阻抗:1000 MΩ Min.

3. 原材料:Material:

1. 胶芯:insulater:PBT

2. 端子>Contact:Copper Alloy C2680

3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子>Contact: Plated Gold in Mating Area;
Tin On Solder Talls

端子四周镀50U" (MIN) 锡, 镀金区域镀100-200U" 镀金1~3U"




2. 外壳:Shell:

铜壳四周镀80U" (MIN) 锡

Nickel Plating



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3' .X*: ±2' .XX*: ±1'		NAME: USB 2.0 AF 侧插长体 L=19.40 H=13.85 弯脚 脚距6.80 端子DIP 卷边 PBT白胶 铁壳			
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: 127-272-040017-W7G			
DR. TSP		FINISH: SEE NOTES		SIZE: A4 DRW NO.:			
PDWG.NO: 0383-1		MAT'L.: SEE NOTES		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2			

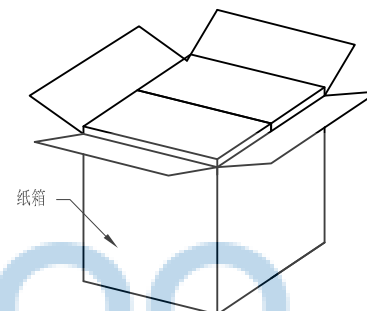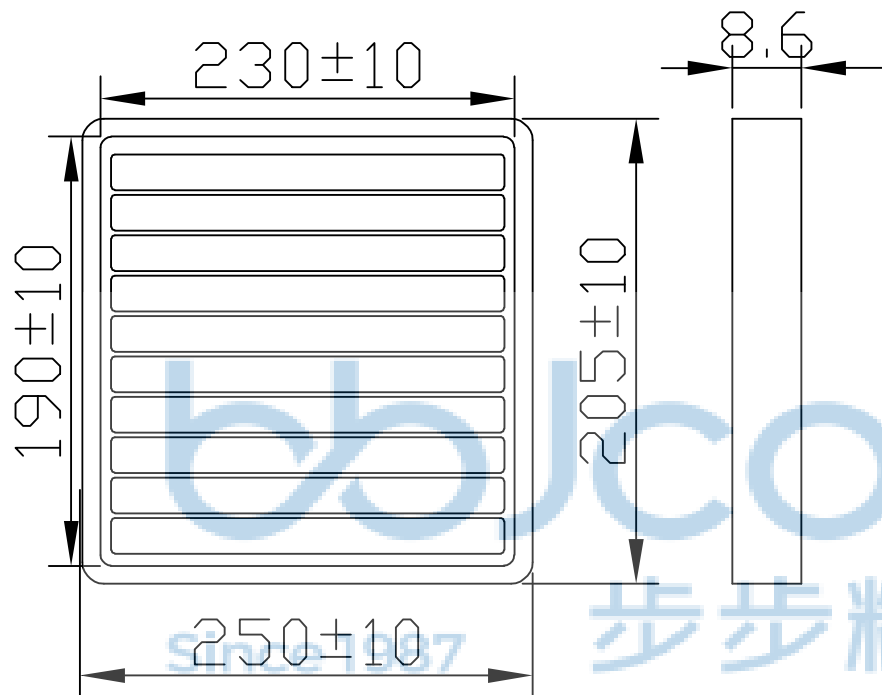

纸箱规格: 350*210*290



1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司		NAME: USB 2.0 AF 侧插长体 L=19.40 H=13.85 弯脚 脚距6.80 端子DIP 卷边 PBT白胶 铁壳	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		PJ. NO.: 127-272-040017-W7G	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0383-1		DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	