

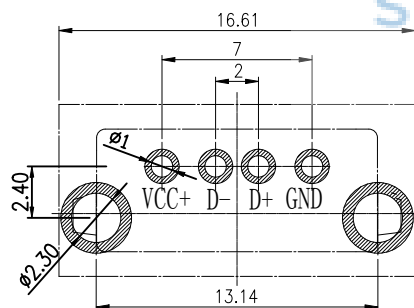
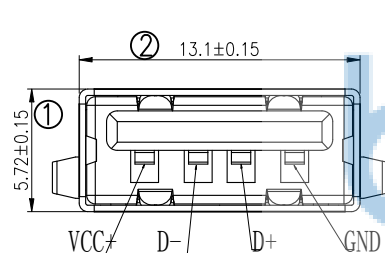
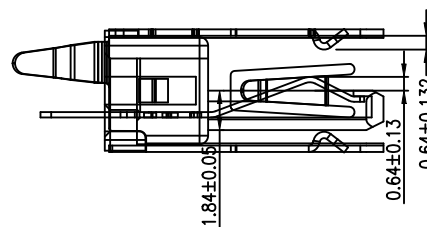

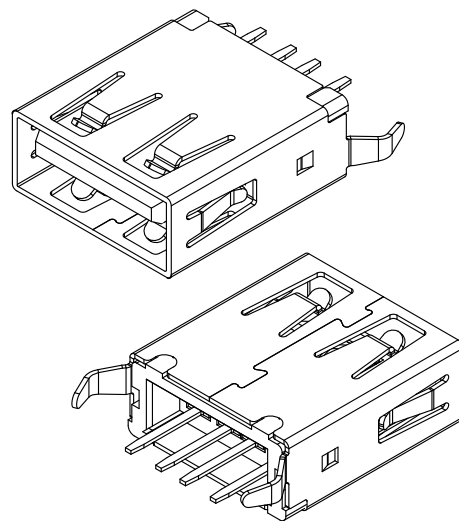
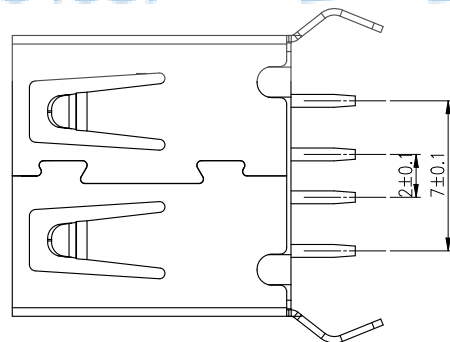


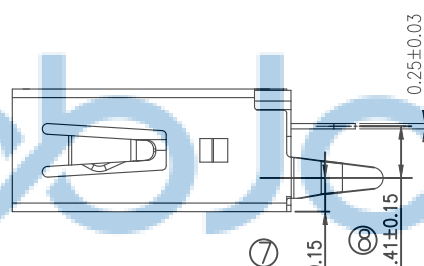

Recommend PCB layout

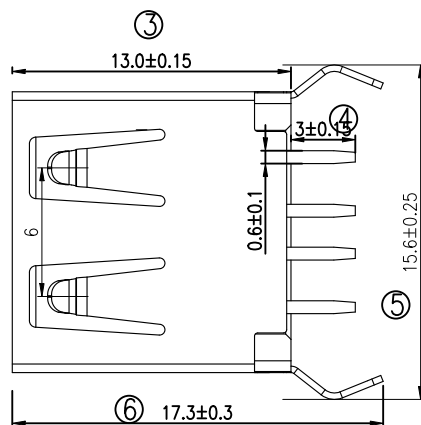

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

1. 材质:
 - 1-1 塑胶: PBT/LCP
 - 1-2 端子: 黄铜C2680
 - 1-3 外壳: C2680/SPCC
2. 电镀:
 - 端子接触区域: 镀金G/F
 - 端子锡脚: 镀锡80u"min.
 - 端子整个表面: 镀镍40u"min.
 - 外壳: 镀铜底50~80u"镀镍50~80u"
3. 电气性能:
 - 3-1 耐电压: 500V 交流电
 - 3-2 接触电阻: 50 毫欧 最大
 - 3-3 绝缘阻抗: 500 兆欧最小
 - 3-4 额定电流: 1.5A
4. 机械性能 (插拔次数1500次)
 - 4-1 插入力: 3.5kgf MAX
 - 4-2 拔出力: 0.8kgf MIN
5. 环境
 - 温度范围: -20° C TO +65° C
 - 6 焊接温度: 230° C
7. 零件必须符合ROHS标准.



铁壳	铜底50-80, 镀镍 50-80u"	PBT UL94 白色	C2680-EH, T=0.25, 半金锡G/F
铜壳	cu, 镀镍50-80u"	LCP 本色; 黑色	
规格	外壳 (1)	胶体 (2)	端子 (3)

PDWG,NO: 0383-1



深圳市步步精科技有限公司

.X:	± 0.38
.XX:	± 0.25
.XXX:	± 0.13

$$\begin{array}{l} X^*: \pm 3^* \\ .X^*: \pm 2^* \\ .XX^*: \pm 1^* \end{array}$$

NAME: USB 2.0 AF 180度 H=13.0 弯脚
端子DIP 平口 LCP黑胶 铁壳






PJ. NO.: 127-275-040047-W7G

SIZE: A4	DRW NO.:
----------	----------

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1 / 2
------------	----------	----------	-------------

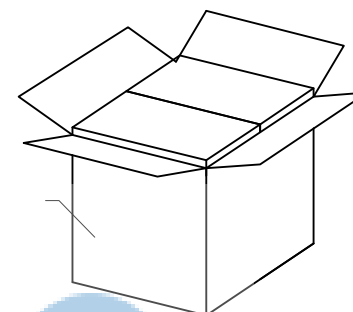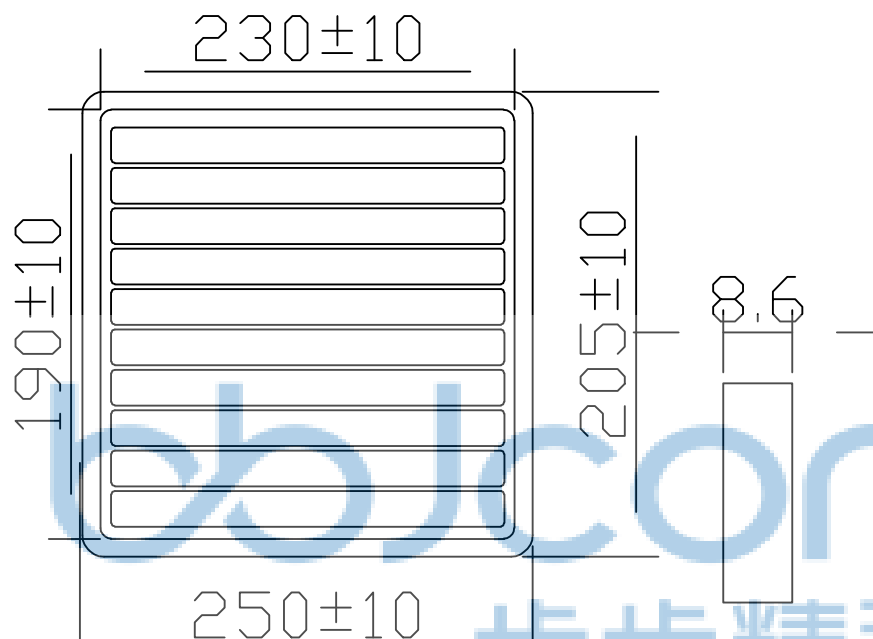

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
 - 1.2 每20盘放一箱, 共计2000PCS;
 - 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: USB 2.0 AF 180度 H=13.0 弯脚 端子DIP 平口 LCP黑胶 铁壳	
APPD. JM_Zheng		PJ. NO.: 127-275-040047-W7G	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0383-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. TSP		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	