



Ø0.92*2

0.60



规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.02kgf (MIN)

原材料:Material:

1. 塑胶: Housing: LCP BLIKE
Hing Temperature Tnermaplastics,
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
端子四周镀50U" (MIN) 锡, 镀金区域镀60-80U"镀金1U"
2. 外壳: Shell:
铁壳四周镀80U" (MIN) 锡
Nickel Plating

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0383-1



深圳市步步精科技有限公司

.X: ±0.38 X°: ±3°
.XX: ±0.25 .X°: ±2°
.XXX: ±0.13 .XX°: ±1°

NAME: USB 2.0 AF 180度 直脚直插 端子DIP
H=10.0 平口 LCP黑胶 铁壳

APPD. JM_Zheng

PJ. NO.: UB.01.12-11-V017

CHKD. LYX

SIZE: A4 DRW NO.:

DR. TSP

FINISH: SEE NOTES

MAT' L.: SEE NOTES



SCALE: N/A

REV.: A0




UNIT: mm

PAGE: 1/2


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

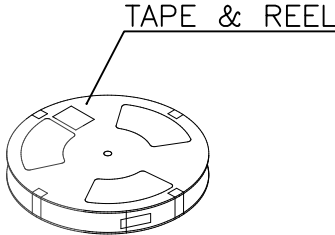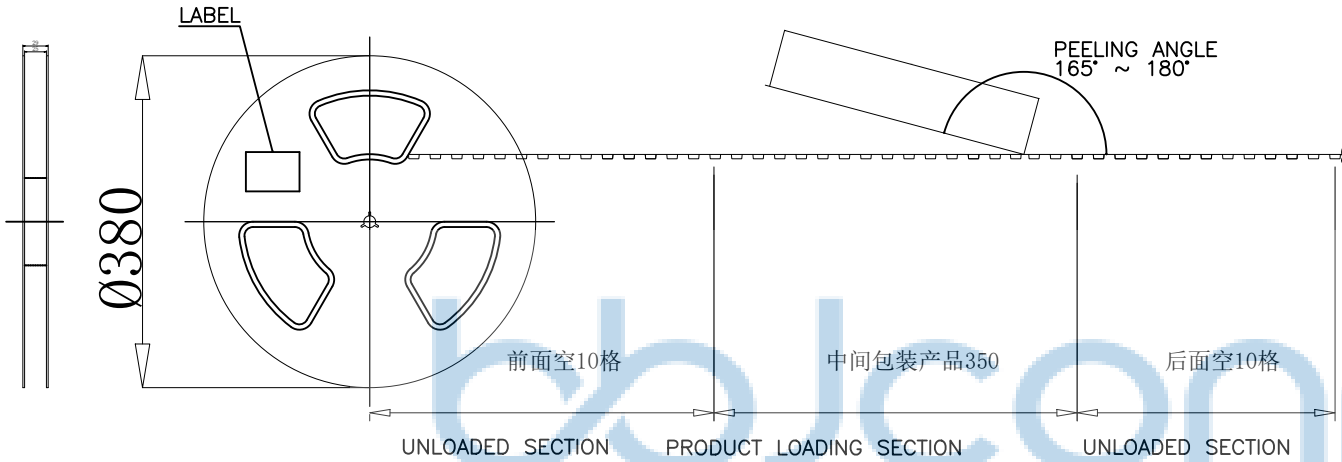

TAPE & REEL

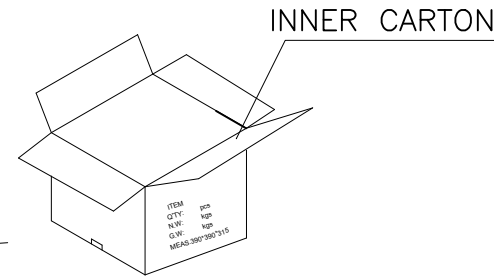

BOX
DIMENSIONS:
390*390*315



SCALE: 1:1



350	10	3500 PCS
PCS/ REEL	REELS/ CARTON	QUANTITY

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0383-1		深圳市步步精科技有限公司		NAME: USB 2.0 AF 180度 直脚直插 端子DIP H=10.0 平口 LCP黑胶 铁壳	
.X: ±0.38	X° :±3°	APPD. JM_Zheng		P.J. NO. : UB.01.12-11-V017	
.XX: ±0.25	.X° :±2°	CHKD. LYX		SIZE: A4 DRW NO. :	
.XXX: ±0.13	.XX° :±1°	DR. TSP		FINISH: SEE NOTES	
				MAT' L. : SEE NOTES	
				SCALE: N/A	REV.: A0
				UNIT: mm	PAGE: 2/2