

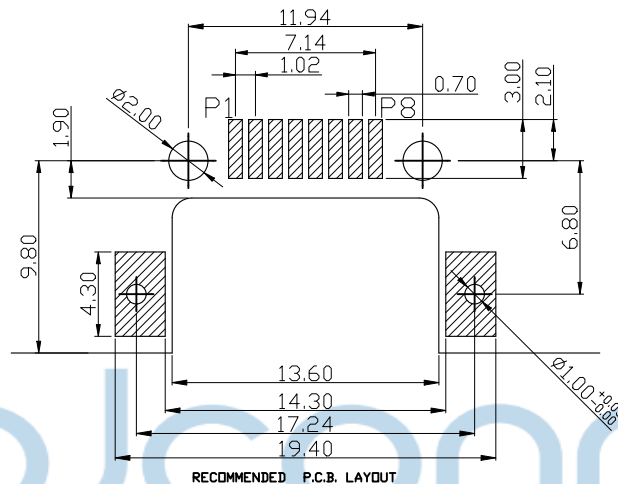
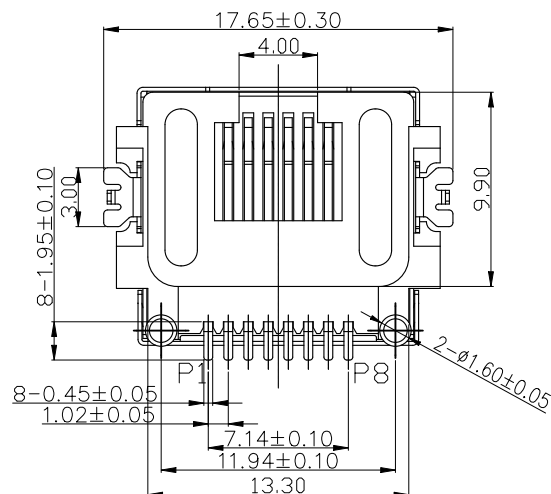
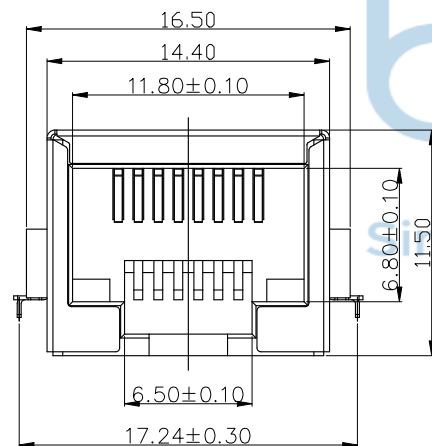
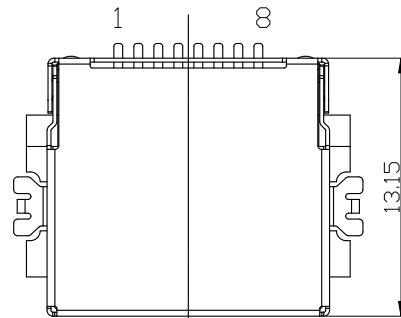



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				



RECOMMENDED P.C.B. LAYOUT

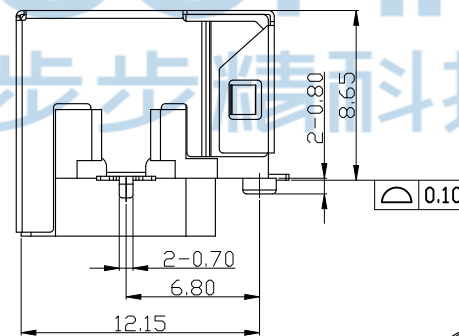


说明:


1. 材质:
胶芯: LCP, UL94V-0; COLOR: BLACK
端子: C2680
外壳: C2680
2. 电镀说明:
端子: 接触区域镀金3U
焊锡区域镀锡
全部区域镍底
外壳: 表面镀镍
3. 性能说明:
1) 电压: 150V AC RMS.
2) 额定电流: 1.5A.
3) 接触电阻: 40mΩ Max.
4) 绝缘电阻: 500MΩ MIN.
5) 绝缘耐压: 1000V AC.
6) 工作温度: -40° C TO +80° C.
7) 耐久性: 500 Mating Cycles MIN.




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: 网络接口 RJ45 1x1 8P8C 90度 L=13.15 沉板8.6 无灯 无弹 全包 带柱 SMT 端子接触区镀金3U	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3° .X*: ±2° .XX*: ±1°		P.J. NO.: 131-2K1-080001-V2G	
APPD. JM_Zheng		CHKD. TSP		SIZE: A4 DRW NO.:	
PDWG. NO: 0100-2		DR. LYX		FINISH: SEE NOTES MAT'L: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

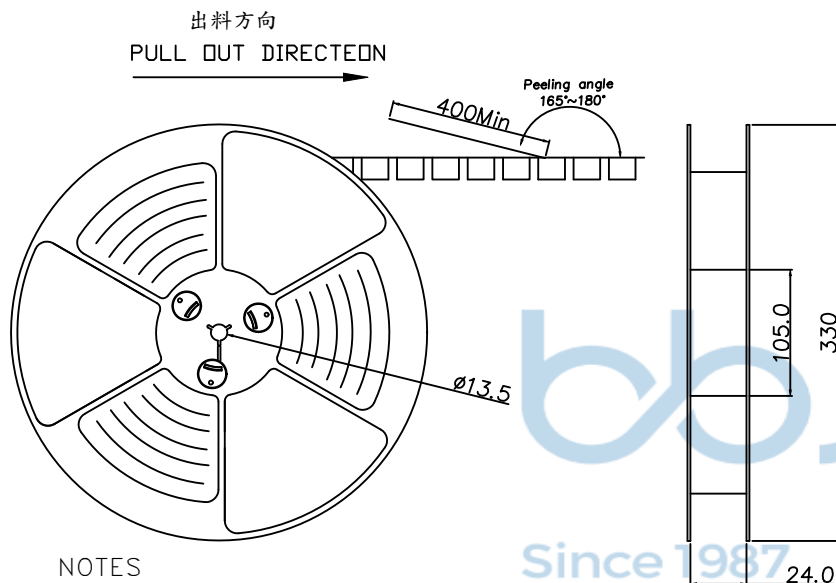

1.帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

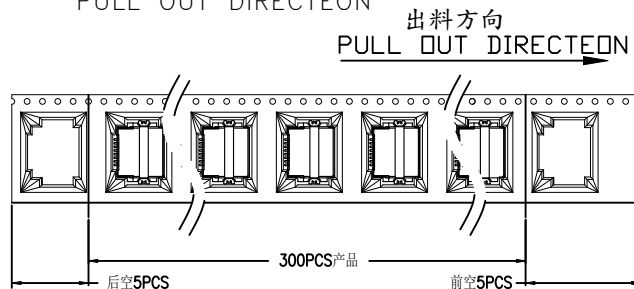


2.上帶 剝力力為：0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意：
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT：
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

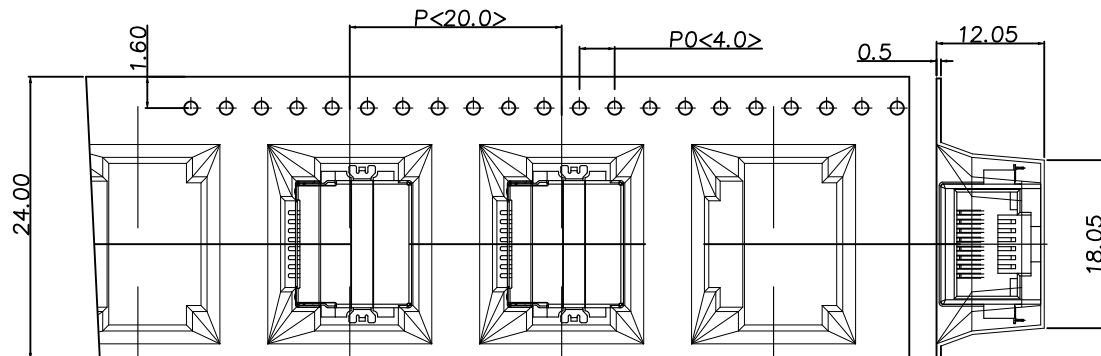

TAPE & REEL 10 PCS


1 REEL
= 300 PCS

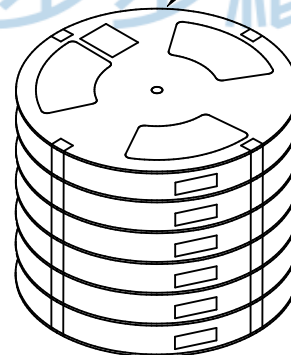

BOX

DIMENSIONS:
33.5X33.5X30.5

LABEL



1 CARTON
=10 REELS
=3000 PCS



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0100-2		深圳市步步精科技有限公司				
		.X: ±0.38 X*: ±3° .XX: ±0.25 .X*: ±2° .XXX: ±0.13 .XX*: ±1°		NAME: 网络接口 RJ45 1x1 8P8C 90度 L=13.15 沉板8.6 无灯 无弹 全包 带柱 SMT 端子接触区镀金3U		
		APPD. JM_Zheng		P.J. NO.: 131-2K1-080001-V2G		
		CHKD. TSP		SIZE:A4 DRW NO.:		
		FINISH: SEE NOTES		MAT'L: SEE NOTES		
		SCALE:N/A		REV.: A0	UNIT:mm	PAGE: 2/2