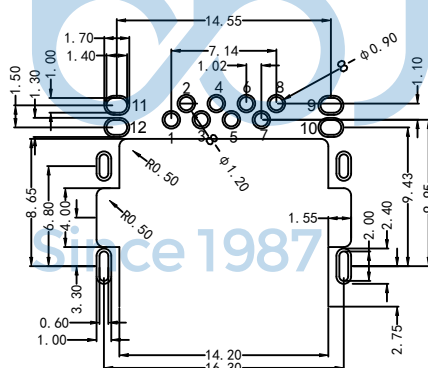
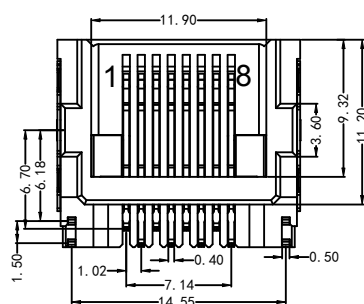
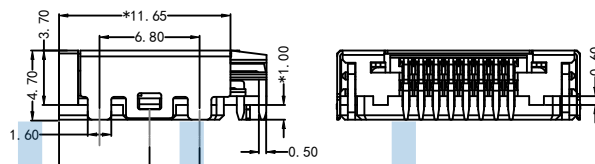
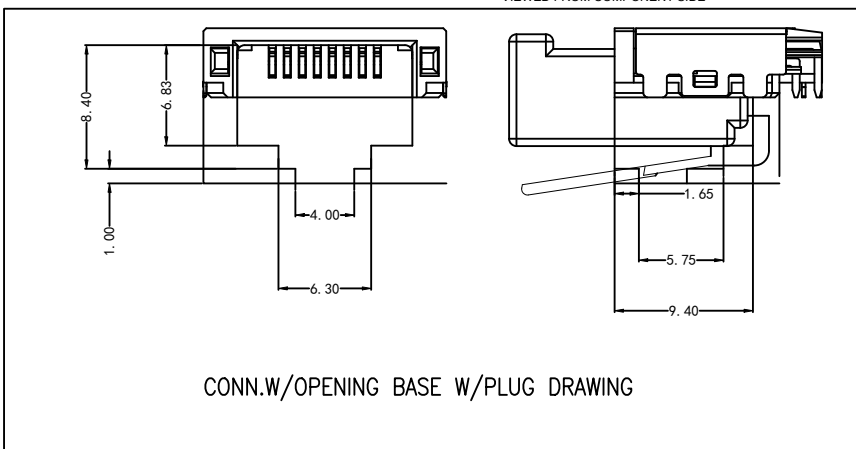




Diagram showing 8 horizontal lines connecting PCB SIDE TO PHY (1-8) to CABLE SIDE (J1-J8).

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

CONN.W/OPENING BASE W/PLUG DRAWING

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
White	568nm	20mA	1.7-2.2V
Amber	585nm	20mA	1.7-2.2V



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

HOUSING: LCP, UL94V-0, BLACK.
 TERMINAL: PHOSPHOR BRONZE T=0.25MM,
 1U" GOLD PLATING ON CONTACT AREA.
 SHIELD: STAINLESS STEEL

DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.
 INSERTION FORCE: 2.2KG.F MAX.
 RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
 OPERATING TEMPERATURE: 0°C ~+70°C.
 STORAGE TEMPERATURE: -40°C ~+85°C.
 ALL CRITICAL DIMENSIONS WITH "※"

VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1 MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.



NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0521-1



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

APPD. JM Zheng

ANALYST:	SM_Energy
CLIENT:	USM

4.	CHKD.	LYX

DR.	TSP
-----	-----

NAME	网络接口 RJ45 1x1 8P8C 90度 L=14.10 沉板3.70 带屏蔽 带灯 左白右琥珀 无弹 DIP
------	--







PJ. NO.: 131-2K2-080024-Y7G

SIZE: A4	DRW NO.:
----------	----------

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1 / 2
------------	----------	----------	-------------

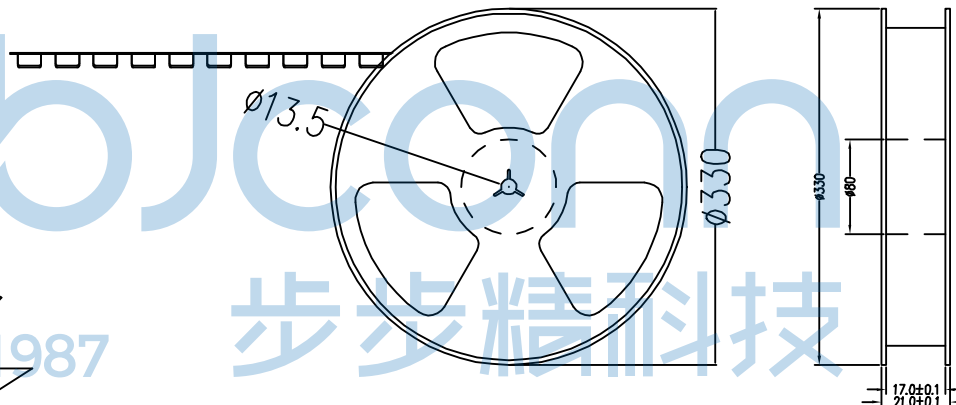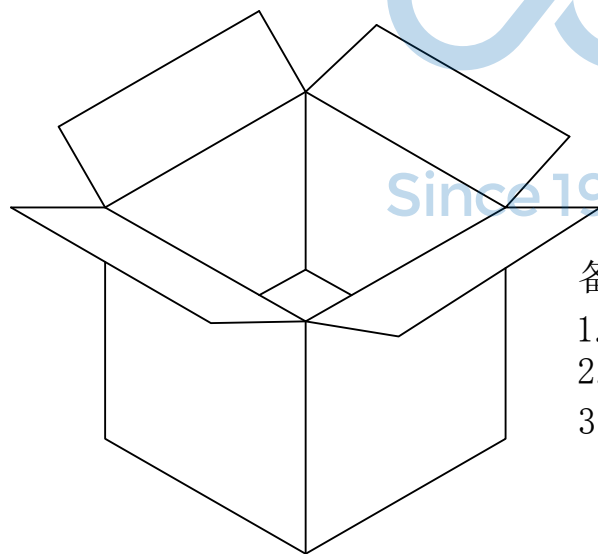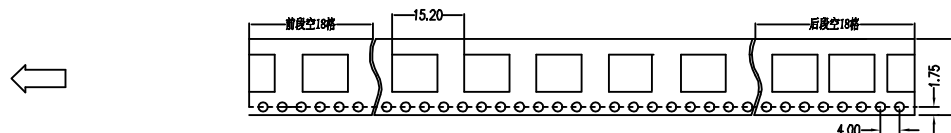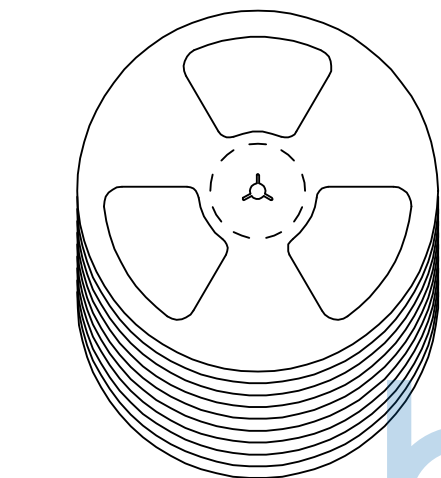

备注:

1. 包装数量: 500/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) ,
上带: 聚乙烯 (PET) ,
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X": ±3" .X": ±2" .XX": ±1"	NAME网络接口 RJ45 1x1 8P8C 90度 L=14.10 沉板3.70 带屏蔽 带灯 左白右琥珀 无弹 DIP	
APPD.	JM_Zheng	PJ. NO.: 131-2K2-080024-Y7G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO: 0521-1	DR.	TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2