


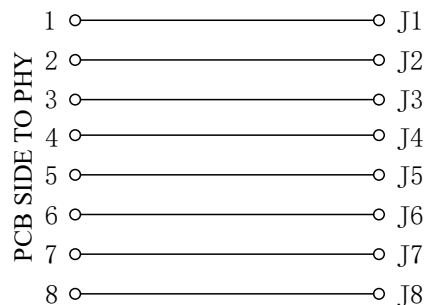



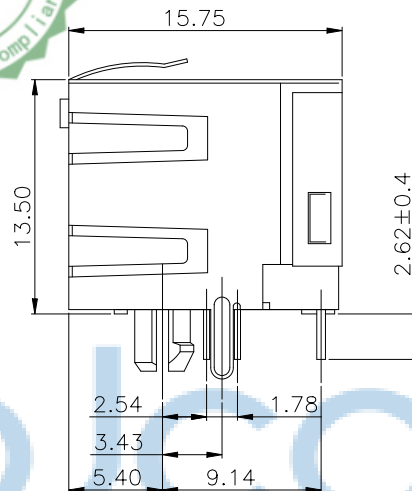

CABLE SIDE

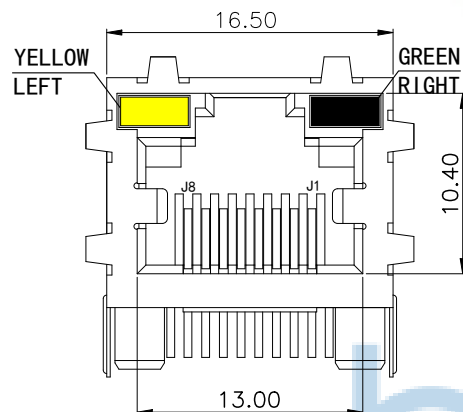

RECOMMENDED PCB LAYOUT  
VIEWED FROM COMPONENT SIDE

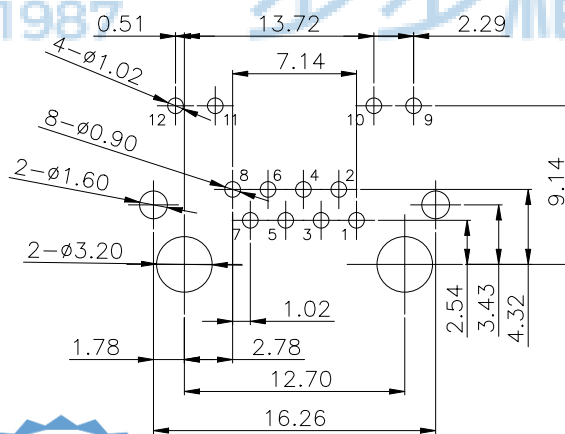

| REV | ECN NO | CONTENT         | DATE | ENGINEER |
|-----|--------|-----------------|------|----------|
| A0  |        | INITIAL RELEASE | /    | SGF      |

#### MATERIAL:

HOUSING: PBT,UL94V-0,BLACK.

TERMINAL: PHOSPHOR BRONZE T=0.35MM,

6U" GOLD PLATING ON CONTACT AREA.

SHIELD: C2680,T=0.20MM,20U" MIN NICKEL PLATING ON ALL AREA.

#### MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.

INSERTION FORCE: 2.2KG.F MAX.

RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE: -40℃~+85℃.

#### ELECTRICAL:

VOLTAGE: 125 VOLTS AC.

CURRENT RATING : 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.

INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL

AFTER 500V DC FOR 1 MINUTE.


CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.

INITIAL 50 MILLIOHMS MAX. AFTER

DURABILITY TEST.

#### LED Specification

| Standard LED Color | LED Wavelength | Foward(A) | Foward(V)  |
|--------------------|----------------|-----------|------------|
| Green              | 568nm          | 20mA      | 1.85-2.45V |
| Yellow             | 585nm          | 20mA      | 1.7-2.2V   |

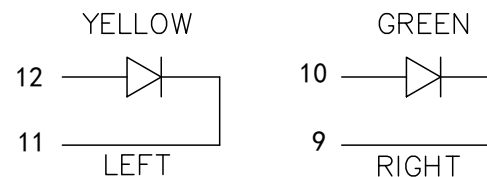

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
PRIOR WRITTEN PERMISSION.

PDWG NO: 0521-1

深圳市步步精科技有限公司

.X: ±0.38 X': ±3'  
.XX: ±0.25 .X': ±2'  
.XXX: ±0.13 .XX': ±1'

APPD JM\_Zheng

CHKD LYX

DR

SGF

NAME:网络接口 RJ56 1X1 8P8C 90度 直通 L=15.75  
带灯 左黄右绿 DIP 带弹 带柱 盒装

PJ NO:131-2K2-080033-Y7G

SIZE:A4 DRW NO:

FINISH:SEE NOTES

SCALE:N/A



MAT'L:SEE NOTES

UNIT:mm


PAGE:1/2



| REV | ECN NO | CONTENT         | DATE | ENGINEER |
|-----|--------|-----------------|------|----------|
| AO  |        | INITIAL RELEASE | /    | SGF      |




图一

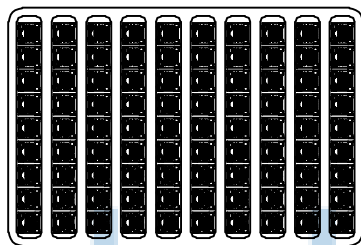


每行9PCS  
每盒90PCS

图二

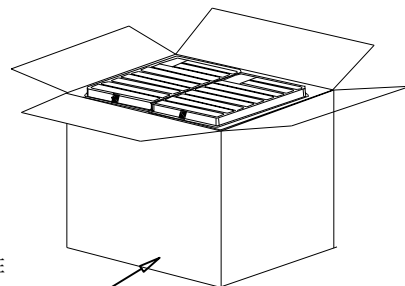

11层3排  
每箱2970PCS  
33盒装

图三

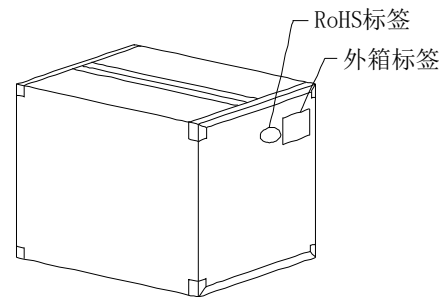


图四

### 包装说明和注意事项:

- 将单个产品放入对应吸塑盒内 (图一)。
- 对每盘装好产品的吸塑盒盖上上盖, 在PVC吸塑盒中间各订上一针 (图二)。
- 将装满产品的吸塑盒放入纸纸箱 (图三)。
- 用封箱胶纸将纸箱进行封装作业 (图四), 并在纸箱的一侧右上角贴上外箱标签和RoHS标签 (图四)。
- 吸塑盒内产品不可多放或少放, 方向要一致。
- 有未装满一箱要用泡棉或其它不影响品质之物品来填满并贴上注明尾数。

装箱数量:  
90PCS\*33盒=2970PCS/1箱.

纸箱规格:  
K=K 560mm\*265mm\*195mm

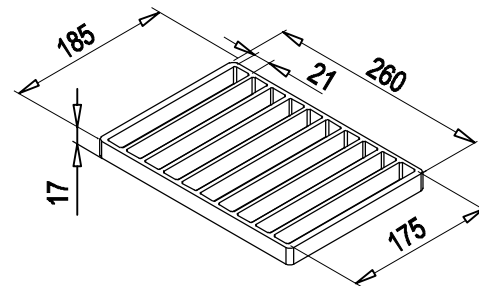

注: 纸箱尺寸为内空尺寸, 3#箱



|                                                                                                                                                        |          |                                                              |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------------------------------------------------------|--|
| THIS DOCUMENT IS THE<br>SOLE PROPERTY OF<br>BBJconn Technology Co.,Ltd.<br>Corporation AND SHOULD<br>NOT BE USED IN WHOLE<br>PRIOR WRITTEN PERMISSION. |          | 深圳市步步精科技有限公司                                                 |  |
| APPD                                                                                                                                                   | JM_Zheng | NAME: 网络接口 RJ56 1X1 8P8C 90度 L=15.75<br>带灯 左黄右绿 DIP 带弹 带柱 盒装 |  |
| CHKD                                                                                                                                                   | LYX      | PJ NO: 131-2K2-080033-Y7G                                    |  |
| PDWG NO: 0521-1                                                                                                                                        |          | SIZE: A4   DRW NO:                                           |  |
| DR                                                                                                                                                     |          | FINISH: SEE NOTES   MAT'L: SEE NOTES                         |  |
|                                                                                                                                                        |          | SCALE: N/A   REV: A0   UNIT: mm   PAGE: 2/2                  |  |