
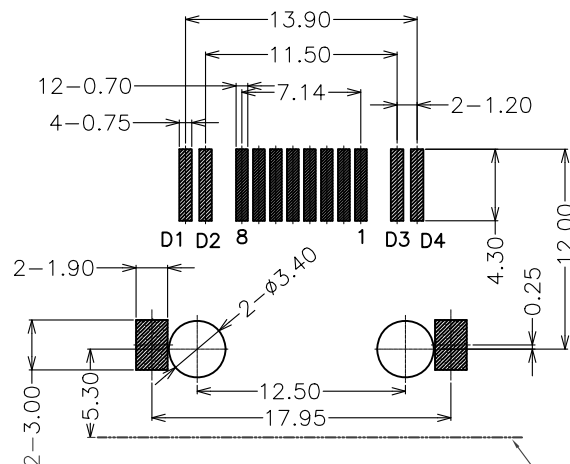


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				



SPECIFICATION NOTES:

ELECTRICAL:

- 1.VOLTAGE RATING: 125 VAC RMS
- 2.CURRENT RATING: 1.5 AMP
- 3.CONTACT RESISTANCE: 20mΩ MAX.
- 4.INSULATION RESISTANCE: 500MΩ MIN. AT500V DC.
- 5.DIELECTRIC STRENGTH: 500 V AC OR 1000V DC RMS AT 1mA 50 Hz / 60 Hz FOR 1MINUTE

MECHANICAL:


- 1.HOUSING:LCP BLACK, UL 94V-0
- 2.CONTACT:PHOSPHOR BRONZE T=0.30MM
- 3.PLATING:FU GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100U MIN., NICKEL 30U MIN. OVER ALL.
- 4.SHELL:BRASS T=0.20
- 5.OPERATING LIFE:750 CYCLES MIN.
- 6.MATING/UNMATING FORCE: 30N/3.06KGf MAX.
- 7.RETENTION STRENGTH:50N OR 30N MIN.FOR 60S±5S

ENVIRONMENTAL:



- 1.STORAGE:-40°C TO +85°C RELATIVE HUMIDITY<80%
- 2.GUARANTEED PERIOD:12 MONTHS
- 3.OPERATION: -40°C TO +85°C
- 4.MANUAL SOLDERING PARAMETERS:24H IR TEMPERATURE: 255±5°C 5~10 SECONDS.

RECOMMENDED PCB LAYOUT
(TOP VIEW)ALL TOLERANCE=±0.05

PCB Edge


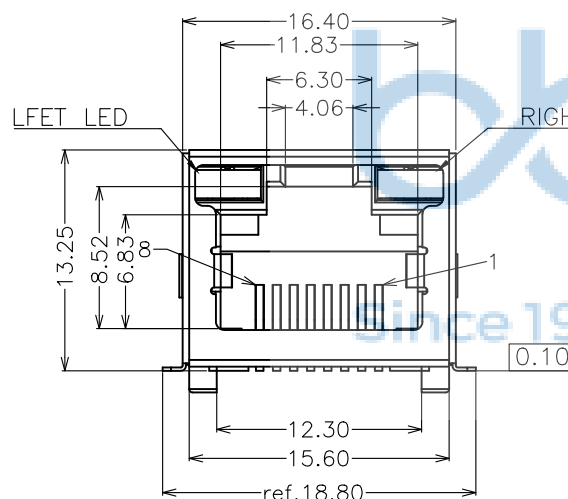


RIGHT LED

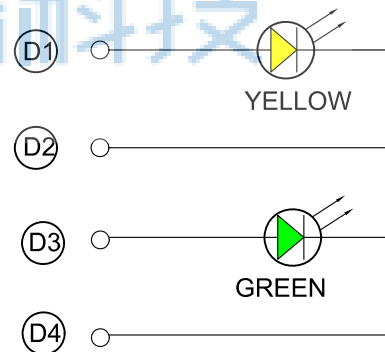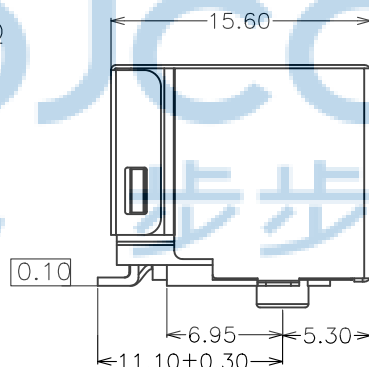

LEFT LED

RIGHT LED

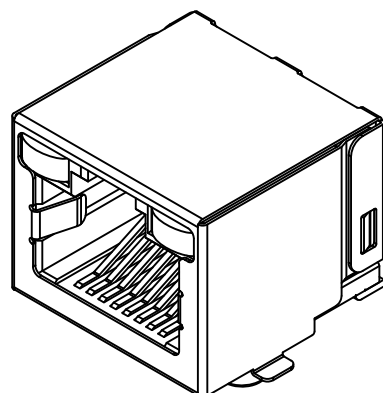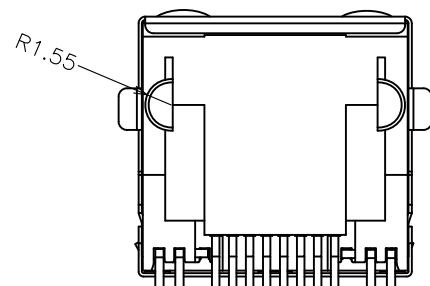

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .X': ±1'

NAME:网络接口 RJ45 53A 1x1 8P8C 90度 L=15.60H=13.25 带灯(左黄右绿)
无弹 不带滤波 LCP黑胶 全包 SMT (111G3H2-000T)

APPD. JM_Zheng PJ. NO.:
CHKD. LYX SIZE: A4 DRW NO.:

PDWG.NO: 0642-1 DR. LHC FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/2

