

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

NOTES

ELECTRICAL

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 40 MILLIOHMS MAX.
- INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
- DIELECTRIC DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.

MECHANICAL







- DURRABILITY : 750 CYCLES MIN.
- MATING/UNMATING FORC: 2.24 KG.F MAX.

ENVIRONMENTAL:

- OPERATION : -40℃~+85℃.
- STORAGE : -40℃~+85℃.



Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

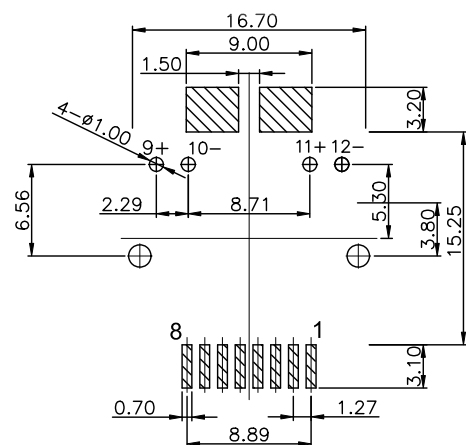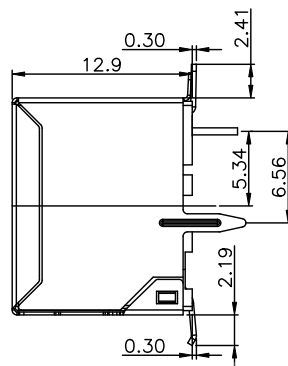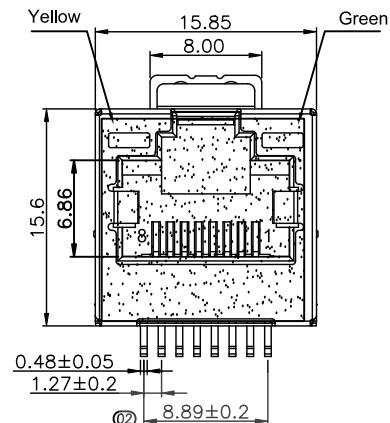

PCBLAYOUT T=1.6
TOL:±0.05



9 — Yellow 10 — Green 11 — Green 12 — Green



6	1.4x3.2x4.0 平头半透明亮绿灯	1	SPCC T=0.5mm	胶体半透明绿色发绿光
5	1.4x3.2x4.0 平头半透明亮黄灯	1	SPCC T=0.5mm	胶体半透明黄色发黄光
4	RJ45 立式12.7H DIP有灯外壳	1	C2680 T=0.35mm	镍50u"
3	RJ45 立式12.7H端子	8	C5191 T=0.35mm	Au/亮锡100u"/NI 50u"
2	RJ45 立式12.7H DIP插芯半成品	1	LCP UL94V-0	
	RJ45 立式12.7H有柱有灯主体	1	LCP UL94V-0	
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

8	—	THIS DOCUMENT IS THE	深圳市步步精科技有限公司	
7	—	SOLE PROPERTY OF		
6	RX-	BBJconn Technology Co.,Ltd.		
5	—	Corporation AND SHOULD		
4	—	NOT BE USED IN WHOLE		
3	RX+	OR IN PART WITHOUT		
2	TX-	PRIOR WRITTEN PERMISSION.		
1	TX+	PDWG.NO: 0642-1		
PIN序	说明	DR. LHC		
		NAME: 网络接口 RJ45 1x1 8P8C 180度 H=12.90 带灯(左黄右绿) 无弹 不带滤波 外壳带耳 全包 SMT (M865-A)"		
		P.J. NO.: 131-2K4-080001-Y6G		
		SIZE: A4 DRW NO.:		
		FINISH: SEE NOTES MAT'L.: SEE NOTES		
		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1		





REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

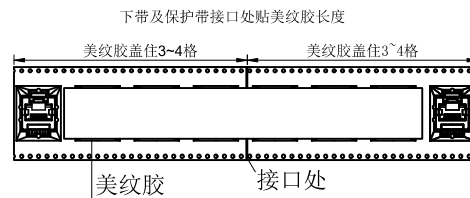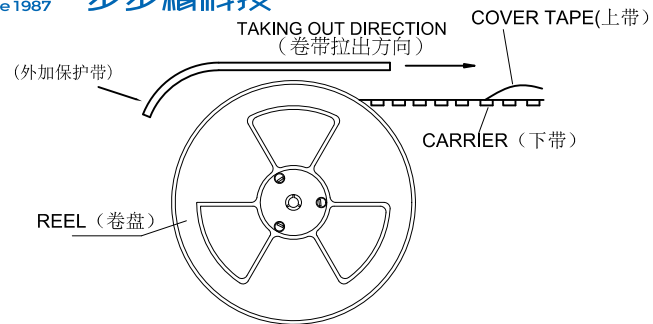

Notes:

1. 每卷前空8PCS,后空8PCS,中间包装200PCS产品,尾部用美纹胶纸封住,美纹胶长度为16~22cm.
2. 外圈再卷一圈保护带,保护带最后重叠50MM MIN. 同样用16~20cm长美纹胶将其封住.
3. 每个卷盘上贴一张物料标签(按要求填写).
4. 每8卷盘装入1个外箱;外箱角落用三角板填充. 用透明胶将外箱封口
5. 将标签(按要求打印好的)贴在纸箱侧麦上方.
6. 尾数箱用纸壳或其它填充物填满空间, 或将纸箱割小至刚好装下.
7. 在搬运过程中要轻拿轻放.
8. 在运输中不可堆放过多,不可有重压现象.

注: 客户特殊要求请参照业务的出货资料

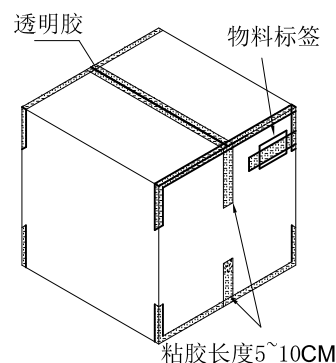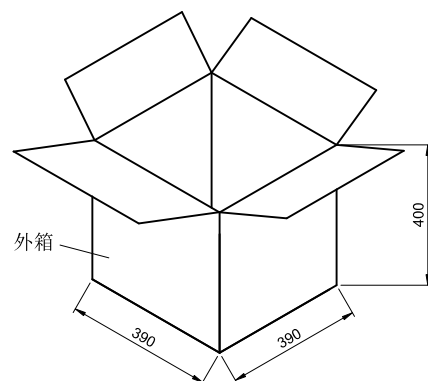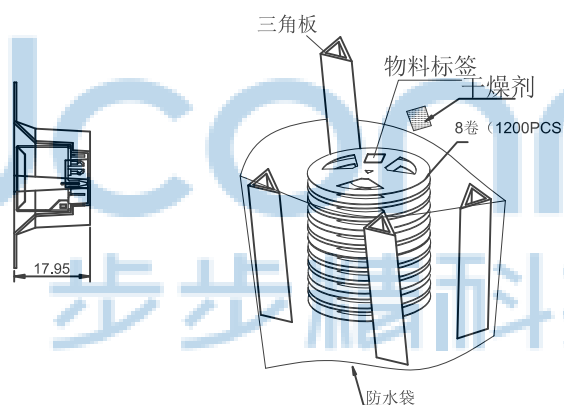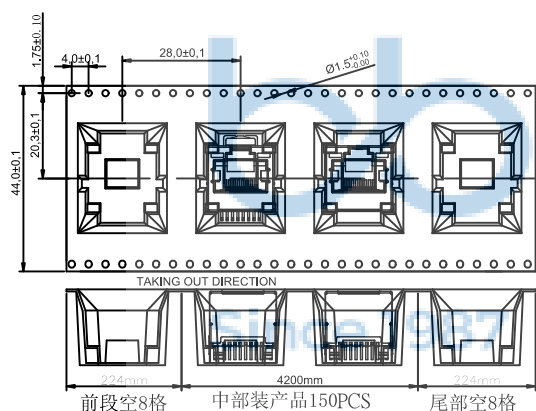

产品	RJ45立式 12.7H 带灯	1200
干燥剂	2g	1包
防水袋	750*660*0.05	1个
透明胶	W=45	若干
美纹胶	宽15mm厚0.08	若干
保护带	透明色, W44*T0.5*1.2米	8
下带	44mm透明色, T=0.5	8*4.7M
上带	37.5mm(自粘)	8*4.7m
卷盘	15~*44.4mm	8
三角板	双坑B=B 375*380*6	4
纸箱	双坑K=A 390*390*400	1
品名	规格 (mm)	用量 (PCS)

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'	NAME:	网络接口 RJ45 1x1 8P8C 180度 H=12.90 带灯(左黄右绿) 无弹 不带滤波 外壳带耳 全包 SMT (M865-A)
APPD.	JM_Zheng 23/05'02	PJ. NO.:	131-2K4-080001-Y6G
CHKD.	LYX 23/05'02	SIZE: A4	DRW NO.:
PDWG.NO:	0642-1	FINISH: SEE NOTES	MAT'L.: SEE NOTES
DR.	LHC 23/05'02	SCALE: N/A	REV.: A3 UNIT: mm PAGE: 1/1