

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

SPECIFICATION NOTES:

ELECTRICAL:



- 1.VOLTAGE RATING: 125 VAC RMS
- 2.CURRENT RATING: 1.5 AMP
- 3.CONTACT RESISTANCE: 40mΩ MAX.
- 4.INSULATION RESISTANCE: 1000MΩ MIN. AT500V DC.
- 5.DIELECTRIC STRENGTH: 500 V AC OR 750V DC RMS AT 1mA 50 Hz / 60 Hz FOR 1MINUTE

MECHANICAL:





- 1.HOUSING:LCP BLACK, UL 94V-0
- 2.CONTACT:PHOSPHOR BRONZE T=0.30MM
- 3.PLATING:FU GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100U MIN., NICKEL 30U MIN. OVER ALL.
- 4.SHELL:BRASS T=0.20
- 5.OPERATING LIFE:750 CYCLES MIN.
- 6.MATING/UNMATING FORCE: 30N/3.06KgF MAX.
- 7.RETENTION STRENGTH:50N OR 30N MIN.FOR 60S±5S

ENVIRONMENTAL:

- 1.STORAGE:-40°C TO +85°C RELATIVE HUMIDITY<80%
- 2.GUARANTEEE PERIOD:12 MONTHS
- 3.OPERATION: -40°C TO +85°C
- 4.MANUAL SOLDERING PARAMETERS:24H IR TEMPERATURE: 255±5°C 5~10 SECONDS.

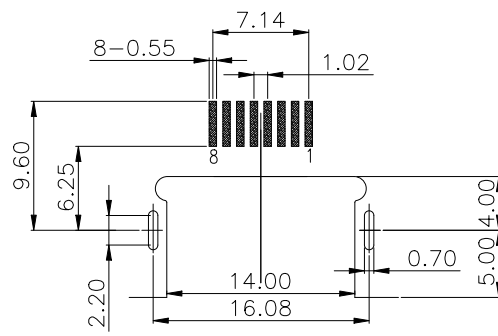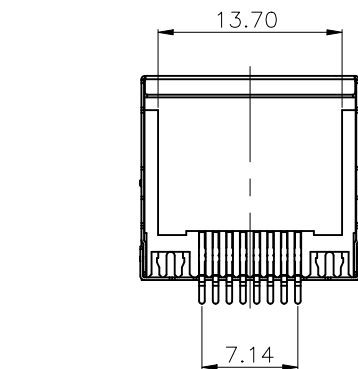

Recommend PCB Layout
(Jack Top View)Tolerance: ±0.05mm

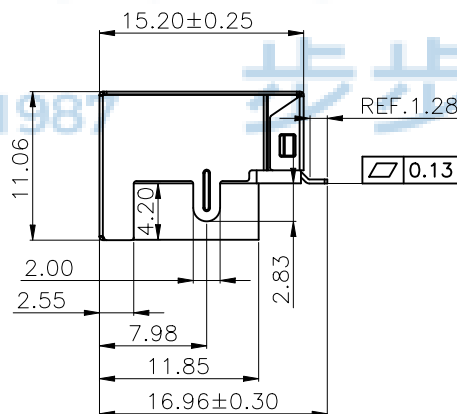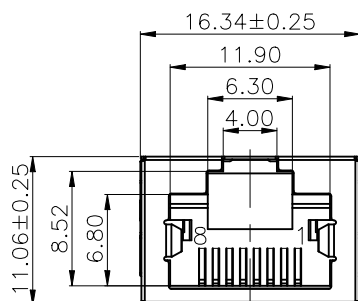

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0642-1

深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 X'': ±2'
.XXX: ±0.13 .XX': ±1'

APPD JM_Zheng

CHKD LYX

DR SGF

NAME:网络接口 RJ45 1x1 8P8C 90度 L=15.20 沉板4.20 无灯 无弹 带屏蔽 FU有壳 SMT 编带

PJ NO: 131-2K2-080005-Y6G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

A

B

C

D

E





A

B

C

D

E

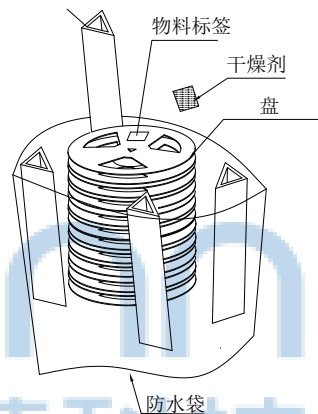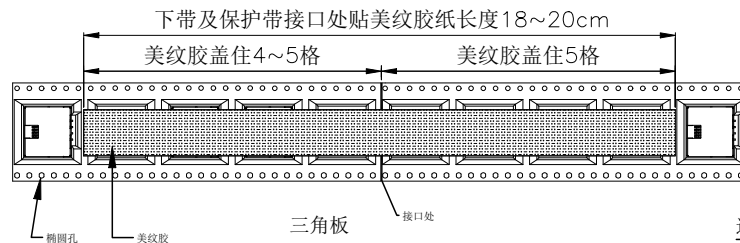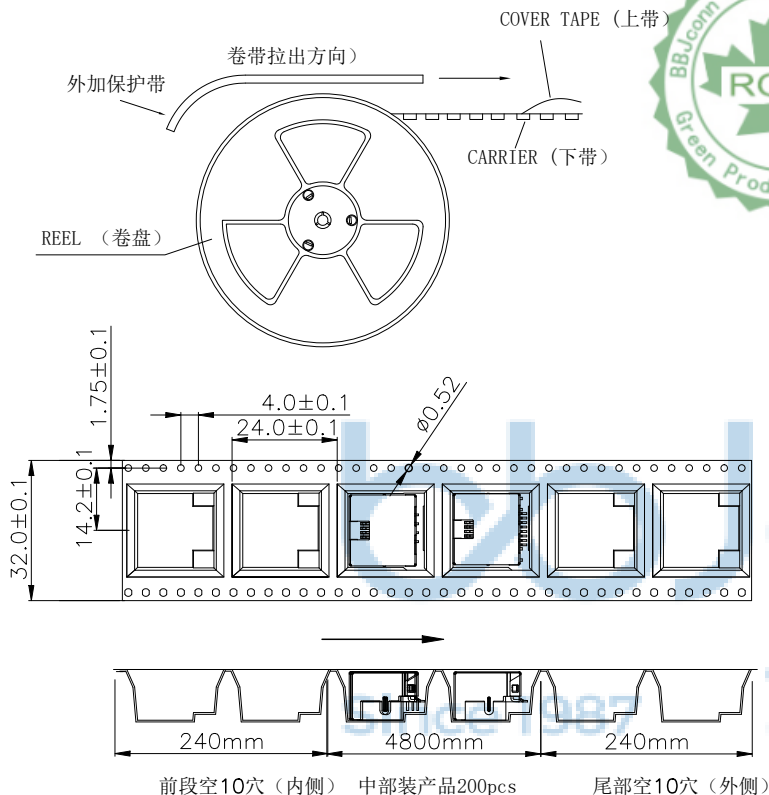

Notes:


1. 没卷前空10pcs, 后空10pcs, 中间包装200pcs产品, 尾部用美纹胶纸封住。
 2. 外圈再卷一圈保护带, 保护带最后重叠50mm Min, 同样用美纹胶封住。
 3. 每10卷盘装入1个外箱, 外箱角落用三角板填充, 用透明胶将外箱封口。
 4. 尾数箱用纸壳或者其他填充或者将纸箱割小至刚好装下后再封箱。
 5. 在搬运过程中要轻拿轻放。
 6. 在运输过程中不可堆叠超过五箱的高度, 不可有重压现象。
 7. 如有客户需要, 将对应打印好的标签贴于外箱侧面右上角。
- 注: 如遇客户特殊要求请参考业务出货资料。

包装信息:

包装数量: 200pcs/卷; 2000pcs/箱;
净重: 5.65KG/箱
毛重: 9.27KG/箱



产品	产品规格	2000
干燥剂	2g	1包
防水袋	750*660*0.05	1个
透明胶	W=46	若干
美纹胶	宽15, T=0.08	若干
下带	宽32mm 透明, T=0.4	10*5.4M
上带	25.5mm 自粘	10*5.28M
卷盘	10*32.4mm	10
三角板	双坑 B=B 335*370*6	4
纸箱	双坑K=A 345*345*380	1
品名	规格 (mm)	用量 (pcs)

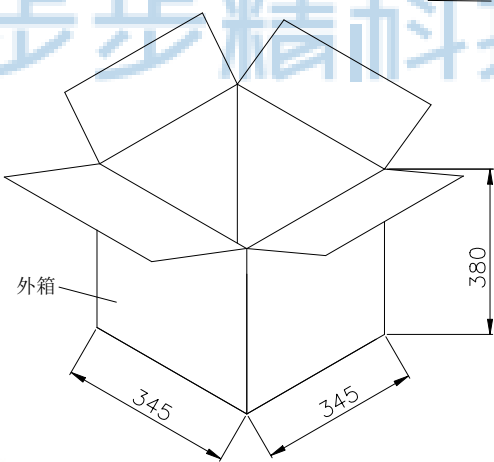

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG NO: 0642-1		NAME: 网络接口 RJ45 1x1 8P8C 90度 L=15.20 沉板 4.20 无灯 无弹 带屏蔽 FU有壳 SMT 编带	
APPD	JM_Zheng	PJ NO: 131-2K2-080005-Y6G	
CHKD	LYX	SIZE: A4 DRW NO:	
DR	SGF	FINISH: SEE NOTES MAT'L: SEE NOTES	
		SCALE: N/A REV: A0 UNIT: mm PAGE: 2/2	