

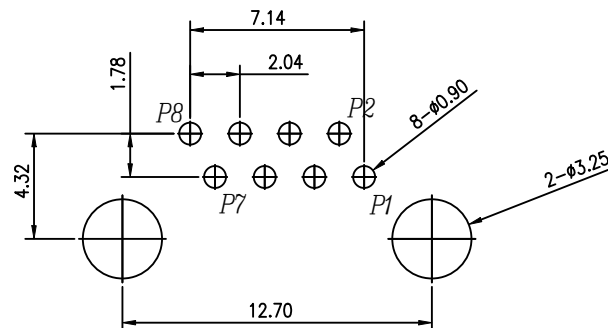
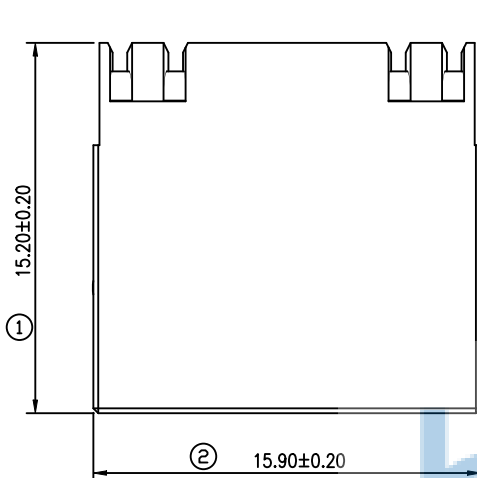


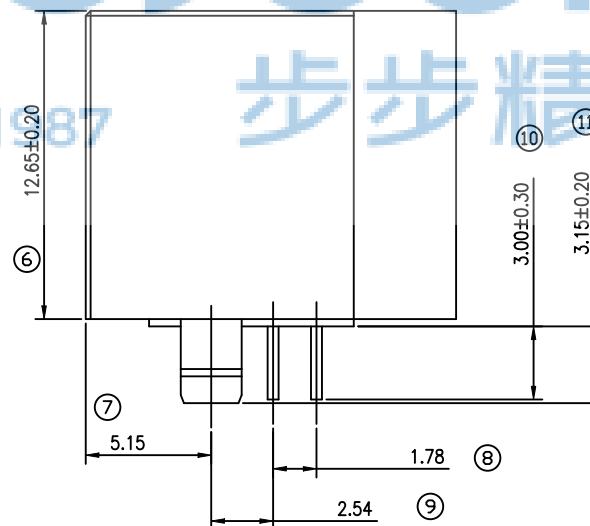

RECOMMENDED P.C.B LAYOUT
TOP VIEW (COMPONENT SIDE)

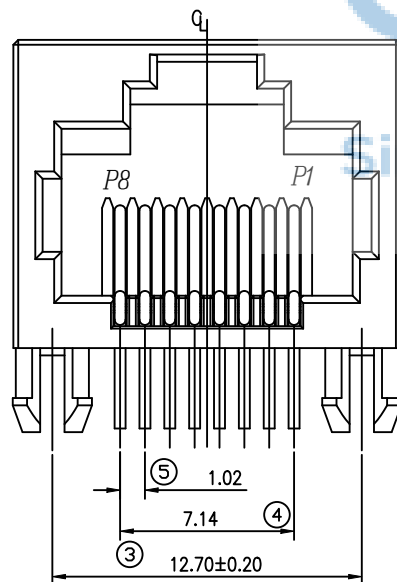

NOTE:

1. MATERIAL:

1.1 HOUSING: (HIGH TEMP.)THERMOPLASTIC
UL94V-0 BLACK .PBT.

1.2 CONTACT: 0.46mm DIA COPPER ALLOY

2. FINISH:

2.1 CONTACT: Gold Flash OVER

3.ELECTRICAL :

3.1 VOLTAGE RATING: 125V AC RMS.

3.2 CURRENT RATING : 1.5 AMP

3.3 CONTACT RESISTANCE : 30 MILLOHMS MAX.

3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500VDC.

3.5 DIELECTRIC STRENGTH 1000V AC RMS 60 Hz 1MIN


3.6 OPERATING: 750 CYCLES MIN.




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
APPD. JM_Zheng		NAME: 网络接口 RJ45 5J 1x1 8P6C 90度 L=15.20 H=12.65 无灯 无弹 PBT黑胶 全塑 DIP 端子脚长3.0 (RJ5J-111A000-0006)	
CHKD. TSP		PJ. NO.: 131-2K2-080008-Y6G	
DR. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0642-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1	

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				


- 数量: 1盘=100Pcs,
一箱20盘=2000Pcs
- 每盘在右上角贴标签(按客户需求), 每10盘为一叠, 一箱放两叠;
- 包材脏污破损不可使用, 包装过程中注意不可碰伤刮伤产品;
- 外箱字材质为K=K, 要求破裂强度为16Kg;

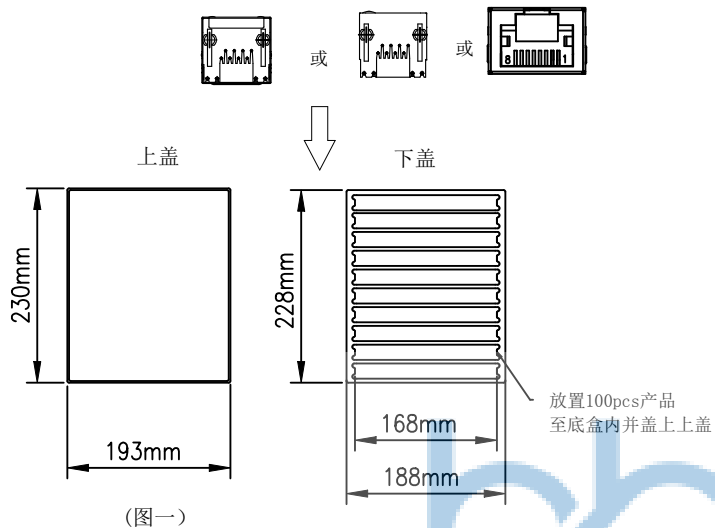


(图四)

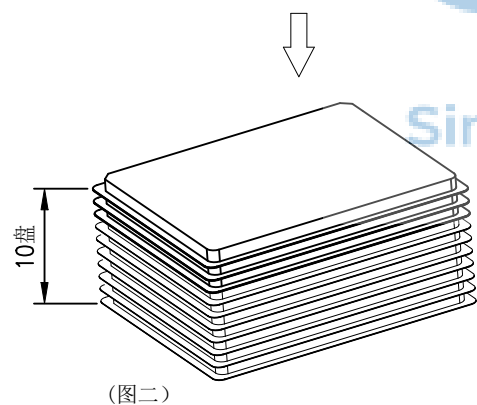

(图二)

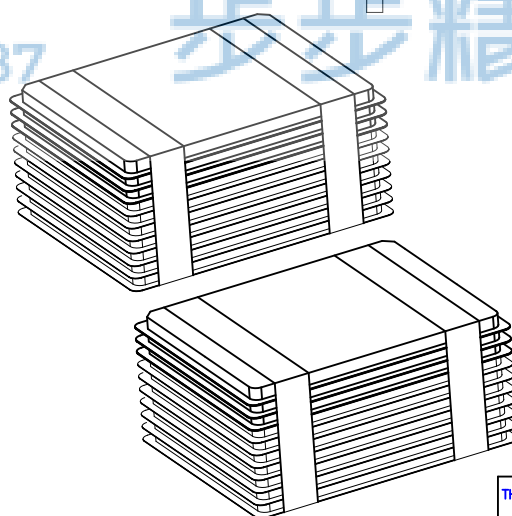

(图三)

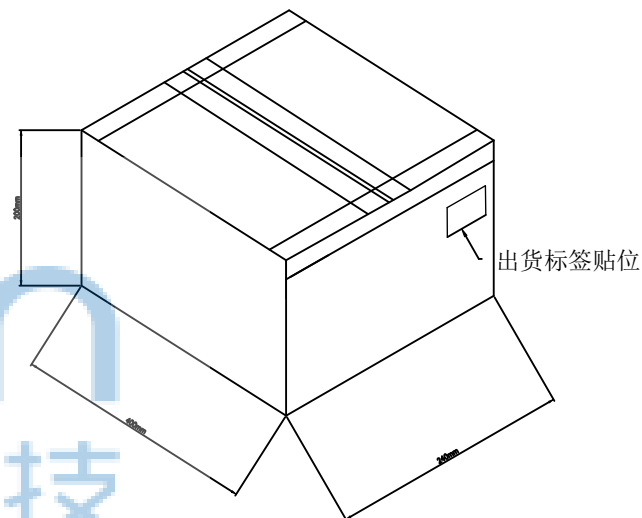

(图五)



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0642-1		深圳市步步精科技有限公司				NAME: 网络接口 RJ45 5J 1x1 8P6C 90度 L=15.20 H=12.65 无灯 无弹 PBT黑胶 全塑 DIP 端子脚长3.0 (RJ5J-111A0000-0006)							
		.X: ±0.38		X*: ±3°									
		.XX: ±0.25		.X*: ±2°			PJ. NO.: 131-2K2-080008-Y6G		SIZE: A4 DRW NO.:				
		.XXX: ±0.13		.XX*: ±1°			MAT'L.: SEE NOTES						
APPD. JM_Zheng		CHKD. TSP		FINISH: SEE NOTES		SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 1/2	
DR. LYX													