

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

NOTES

ELECTRICAL

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
5. DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.

MECHANICAL

1. DURABILITY : 750 CYCLES MIN.
2. MATING/UNMATING FORC: 2.24 KG.F MAX.





ENVIRONMENTAL:

1. OPERATION : -40℃~+85℃.
2. STORAGE : -40℃~+85℃.



Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

6	1.4x3.2x4.0 平头半透明亮锡绿灯	1	SPCC T=0.5mm	胶体半透明绿色发绿光
5	1.4x3.2x4.0 平头半透明亮锡黄灯	1	SPCC T=0.5mm	胶体半透明黄色发黄光
4	RJ45 立式12.7H DIP有灯外壳	1	C2680 T=0.35mm	镍50u"
3	RJ45 立式12.7H端子	8	C5191 T=0.35mm	Au/亮锡100u"/NI 50u"
2	RJ45 立式12.7H DIP插芯半成品	1	LCP UL94V-0	
1	RJ45 立式12.7H有柱有灯主体	1	LCP UL94V-0	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR

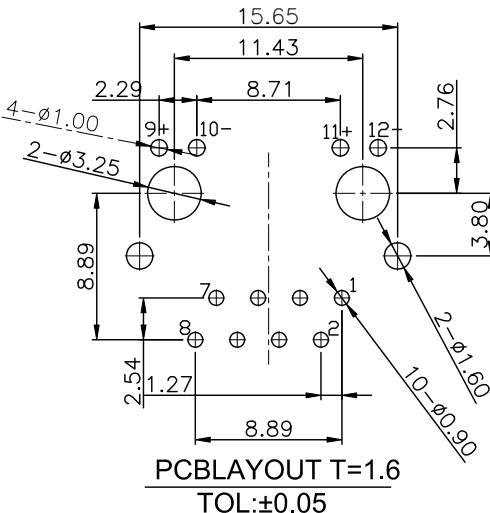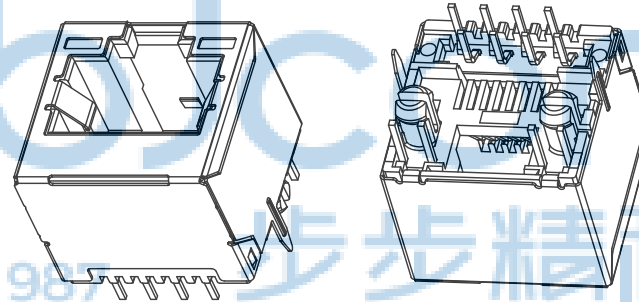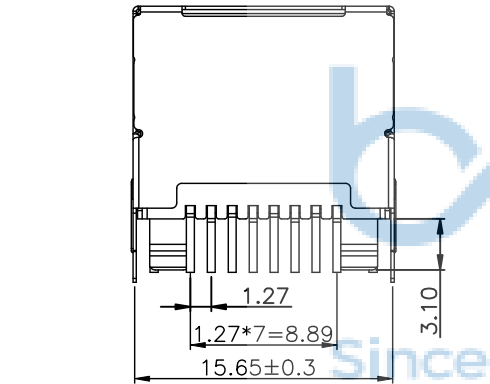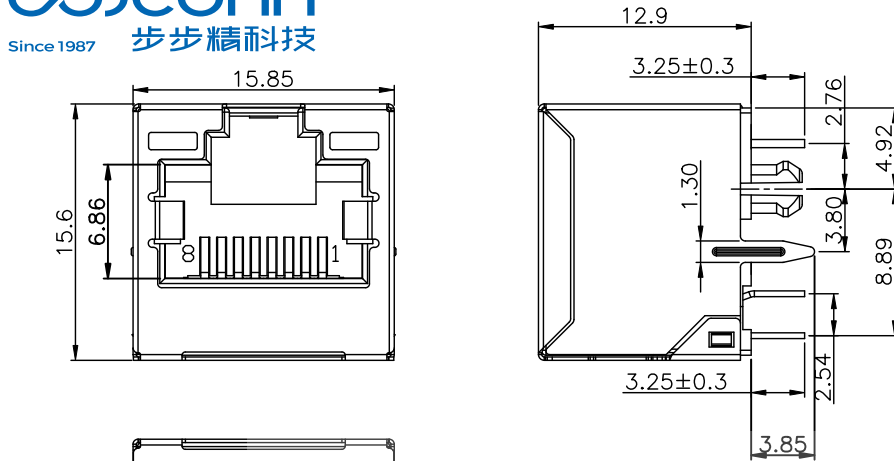

9 LEFT 10 RIGHT 11 12







8	THIS DOCUMENT IS THE	深圳市步步精科技有限公司		
7	SOLE PROPERTY OF			
6	BBJconn Technology Co.,Ltd.			
5	Corporation AND SHOULD			
4	NOT BE USED IN WHOLE			
3	OR IN PART WITHOUT			
2	PRIOR WRITTEN PERMISSION.			
1	PDWG.NO: 0642-1			
PIN/序	说明			
		NAME: 网络接口 RJ45 1x1 8P8C 180度 H=12.90 带灯(左黄右绿) 无弹 不带滤波 有柱 全包 DIP (M832-A)		
		P.J. NO.: 131-2K5-080002-Y6G		
		SIZE: A4 DRW NO.:		
		FINISH: SEE NOTES MAT'L.: SEE NOTES		
		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1		

- 一:
- 1) 将成品一一放入包装盘内, 焊脚朝上, 依同一方向放入.
 - 2) 包装时, 依图所示. 一个包装盘放满若干个成品.
全塑: 140PCS/盘, 带壳 130PCS/盘
 - 3) 盖上托盘上盖.


- 二:
- 4) 依次往上叠放10盘, 产品方向保持一致, 用PE膜将托盘两边缠绕 (PE膜距托盘边约50mm) 再在托盘中中间缠绕一扎. (缠绕2~3圈. 用力要适当, 不宜过紧或过松)
 - 依次往上叠放7盘, 产品方向保持一致, 用PE膜将托盘两边缠绕 (PE膜距托盘边约50mm) 再在托盘中中间缠绕一扎. (缠绕2~3圈. 用力要适当, 不宜过紧或过松)
 - 5) 将产品盘放入外箱中. 每箱放2扎. 共17个产品盘,

- 三:
- 1) 用透明胶将纸箱封实.
 - 2) 将标签 (按要求打印好的) 贴在纸箱侧麦右上方.
 - 3) 尾数箱用纸壳或其它填充物填满空间, 或将纸箱割小至刚好装下.
 - 4) 在搬运过程中要轻拿轻放.
 - 5) 在运输中不可堆放过多, 不可有重压现象.

注: 客户特殊要求请参照业务的出货资料

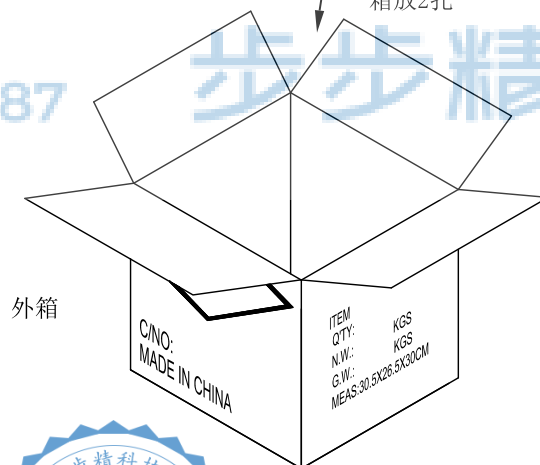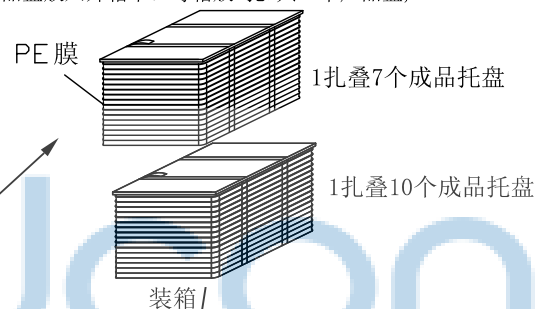

封箱

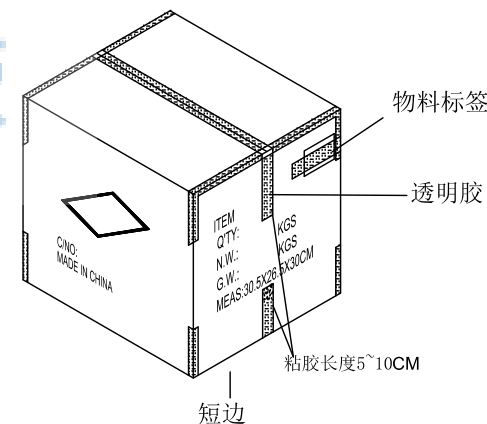

产品	立式SMT带壳带灯	2210
产品	立式DIP全塑无灯	2380
产品	立式DIP带壳	2210
PE膜	宽40厚0.03	若干
透明胶	W=45	若干
吸塑盘盖	285*245*13	10
吸塑盘底	285*245*13	4
外箱	双坑A=A 305*265*300	1
品名	规格 (mm)	用量 (PCS)

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0642-1	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
NAME: 网络接口 RJ45 1x1 8P8C 180度 H=12.90 带灯 (左黄右绿) 无弹 不带滤波 有柱 全塑 DIP (M832-A)		P.J. NO.: 131-2K5-080002-Y6G	
APPD. JM_Zheng 23/05'02		SIZE: A4 DRW NO.:	
CHKD. LYX 23/05'02		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. LHC 23/05'02		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	

深圳市步步精科技有限公司