



LEFT LED 0.85 RIGHT LED

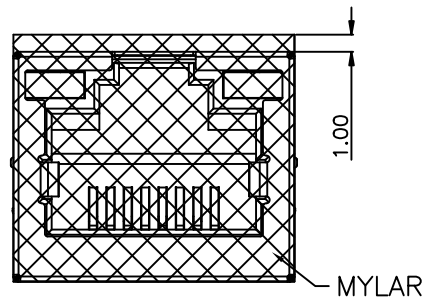

LED SPECIFICATION:

YELLOW		GREEN	
L1	+	L2	-
L3	+	L4	-
LEFT LED		RIGHT LED	
LED Color	P(nm)	VF @IF=20mA	IR @VR=5V
GREEN	565	1.8~2.4 V	10 uA max
YELLOW	585	1.8~2.4 V	10 uA max

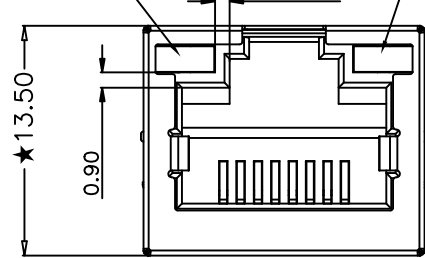

Notes:

ELECTRICAL:





- VOLTAGE RATING: 125 VAC RMS
 - CURRENT RATING: 1.5 AMP
 - CONTACT RESISTANCE: 30 OHMS MAX
 - INSULATION RESISTANCE: 500 OHMS MIN @500 V DC
 - DIELECTRIC STRENGTH: 500 V AC RMS 50Hz or 60Hz 60S
 - MATING/UNMATING FORCE: 2.2KG .F MAX
 - RETENTION STRENGTH: 5.0KG .F NUB BETWEEN JACK AND PLUG
 - OPERATING LIFE: 750 CYCLES MIN
- ENVIRONMENTAL :
- STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY <70%
 - OPERATION: -40°C ~ +85°C

PIN ASSIGNMENT:

PIN	NAME	DESCRIPTION
1	TX+	D1+ Tranceive Data+
2	TX-	D1- Tranceive Data-
3	RX+	D2+ Tranceive Data+
4	BI	D3+ Bi-directional data+
5	BI	D3- Bi-directional data-
6	RX-	D2- Tranceive Data-
7	BI	D4+ Bi-directional data+
8	BI	D4- Bi-directional data-

BOM LIST:

序号	零件品名	材质及表面处理	用量	单位
1	主体	LCP+30%GF, 黑色UL94V-0,	1	PCS
2	端子	C5191, T=0.30MM, 镀金5U" MIN	1	SET
3	外壳	C2680, T=0.20mm, 镀镍30U" MIN	1	PCS
4	LED黄灯	黄色, 耐高温灯, 锡脚亮锡80U"	1	PCS
5	LED绿灯	绿色, 耐高温灯, 锡脚亮锡80U"	1	PCS

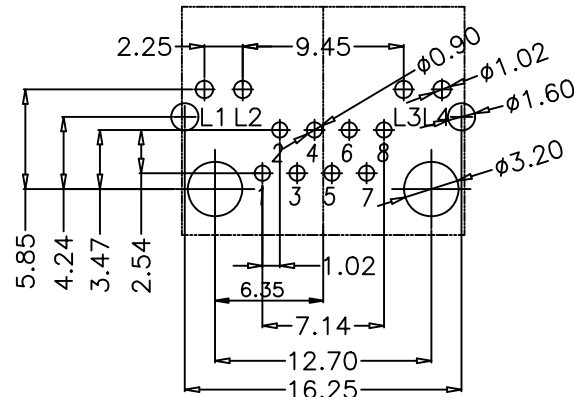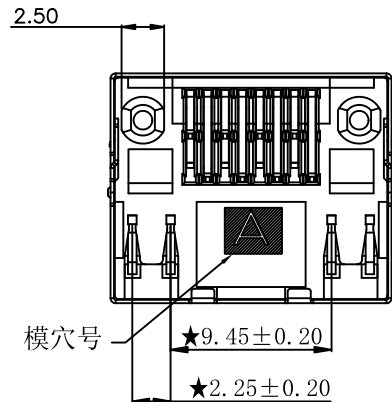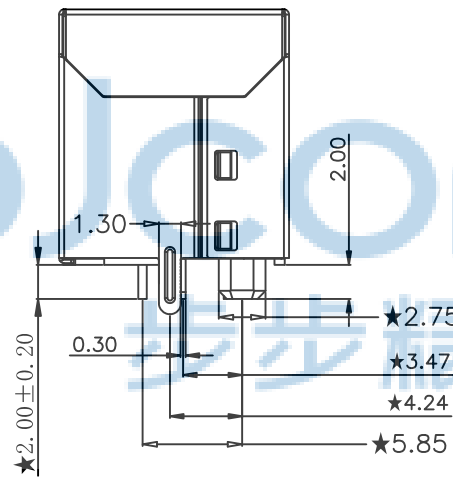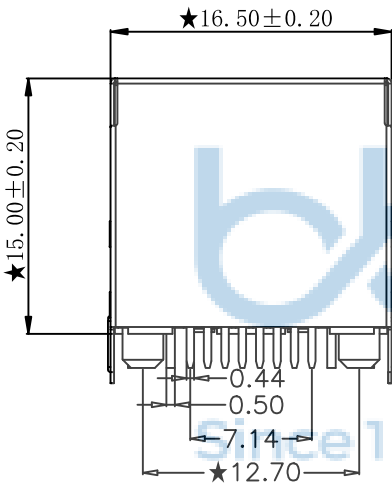

SUGGESTED PCB LAYOUT

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG. NO: 0642-1

深圳市步步精科技有限公司


.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	NAME: 网络接口 RJ45 1x1 8P8C 180度 H=15.0 带灯(左黄右绿) 无弹 不带滤波 端子脚长2.0 端子镀金5u LCP黑色无齿 铜壳 全包 DIP 超薄款
APPD. JM_Zheng	CHKD. LYX	DR. LHC
PJ. NO.: 131-2K5-080003-Y6G	SIZE: A4	DRW NO.:
FINISH: SEE NOTES	MAT'L.: SEE NOTES	SCALE: N/A
REV.: A3	UNIT: mm	PAGE: 1/2

包装数量及材料:


- 数量: 1盘=110PCS, 一箱18盘=1980Pcs
- 包材脏污破损不可使用, 包装过程中注意不可碰伤刮伤产品;
- 外箱字材质为K=K, 要求破裂强度为16Kg;
- 纸箱: 5-XZ-F008; 纸箱尺寸: 45.5cm*31.0cm*20.5cm
- 吸塑底: 5-XS-D026B 吸塑 RJ45 180度超薄 透明底110格
- 吸塑盖: 5-XS-D026A 吸塑 RJ45 180度超薄 透明盖110格

操作步骤:


- 将检验好的产品 窗口面向上摆入下盖中(图1)
- 盖上上盖, 并订好订书针(图1)
- 每9盘一叠, 用拉伸膜缠绕好(图2)
- 放置两叠产品进入纸箱(图3)
- 封箱并贴好标签(图4)

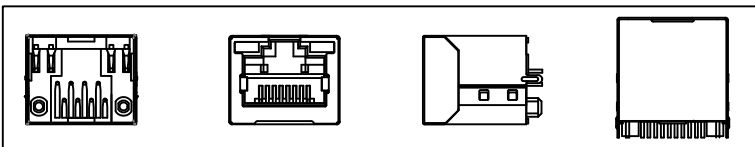


上下盖扣合后四周用订书钉订好



(下盖) 每盘110Pcs




(上盖) (图1)

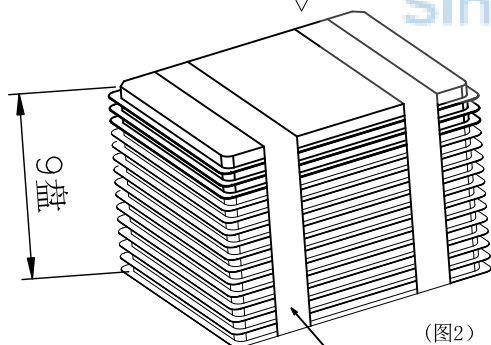


(图2)

拉伸膜

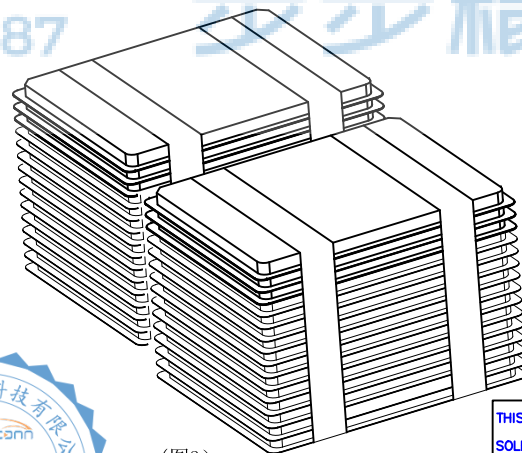

(图3)

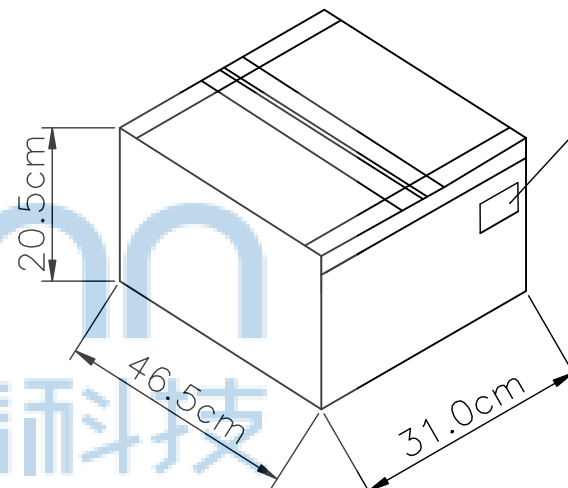

(图4)

出货标签贴位



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG. NO: 0642-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

APPD. JM_Zheng

CHKD. LYX

DR. LHC

NAME: 网络接口 RJ45 1x1 8P8C 180度 H=15.0 带灯(左黄右绿) 无弹 不带滤波 端子脚长2.0 端子镀金5u LCP黑色无卤 铜壳 全包 DIP 超薄款

PJ. NO.: 131-2K5-080003-Y6G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A3 UNIT: mm PAGE: 2/2