

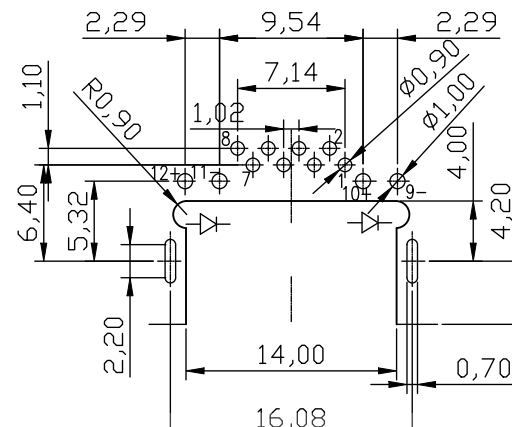

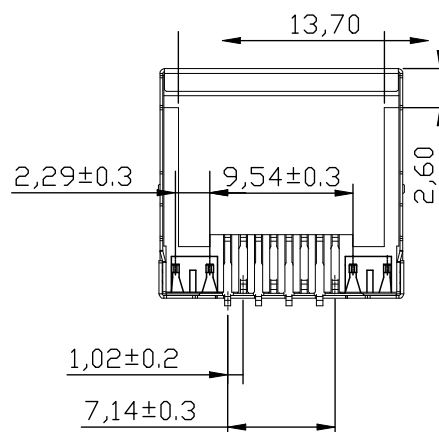


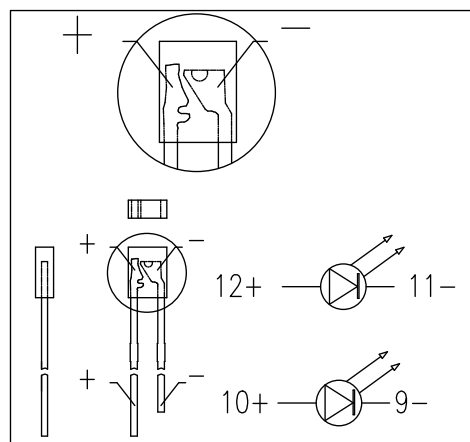

RECOMMENDED PCB LAYOUT
TOLERANCE ± 0.05

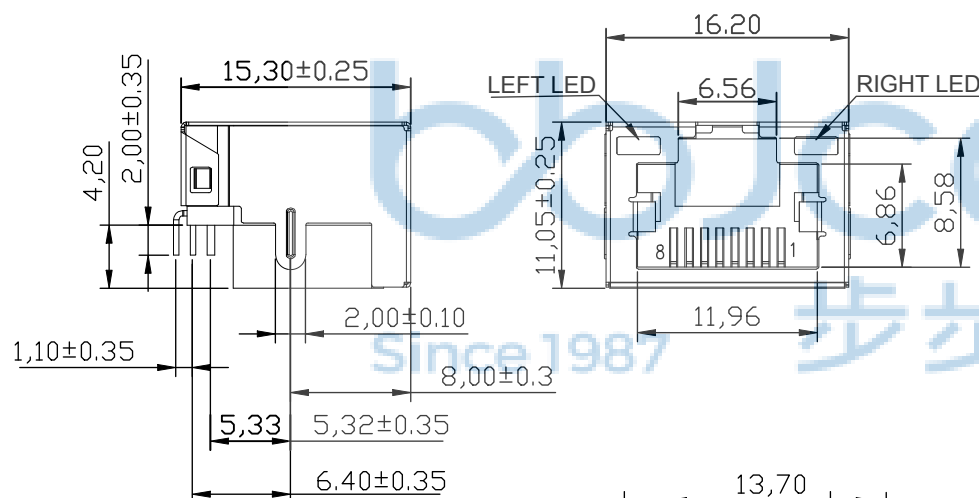

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTE:

1. ELECTRICAL CHARACTERISTICS;

1.1 VOLTAGE RATING:125 VAC RMS

1.2 CURRENT RATING:1.5AMP

1.3 CONTACT RESISTANCE:30 MILLIOHMS MAX

1.4 INSULATION RESISTANCE:1000 MEGOHMS MIN

1.5 DIELECTRIC STRENGTH:1000V AC RMS 50Hz. 1MIN

2 ENVIRONMENTAL:

2.1 TEMPERATURE RANGE:-40° C +85° C

2.2 RELATIVE HUMIDITY:90 95%(40±2° C)



3	SHELL	1	COPPER ALLOY	NI PLATED
2	CONTACT	8	COPPER ALLOY	AU/SN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0409-1



深圳市步步精科技有限公司

.X: ± 0.38 X*: $\pm 3'$
.XX: ± 0.25 .X*: $\pm 2'$
.XXX: ± 0.13 .XX*: $\pm 1'$




NAME: 网络接口 RJ45 1x1 8P8C 沉板4.20 L=15.30
带灯 左绿右黄 无弹 DIP 有壳 盒装

APPD.	JM_Zheng	PJ. NO.:	131-2K2-080002-H5G
CHKD.	LYX	SIZE: A4	DRW NO.:
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 1/2

- 1-1 将HDMI A 直立式的成品80PCS整齐的装入真空盒底盒内。
1-2 将真空盒盖盖在装有成品的底盒上, 以免产品漏失。
备注: 每盘装成品100PCS
真空盒规格: 长285*宽245


- 2-1 每扎共10盘, 用PE膜扎成一扎;
每箱的数量小计:2扎
 $(100*10) + (100*10) = 2000PCS$

- 3-1 将2扎成品依次放入纸箱内. 备注:
纸箱规格: 长305*宽265*高300

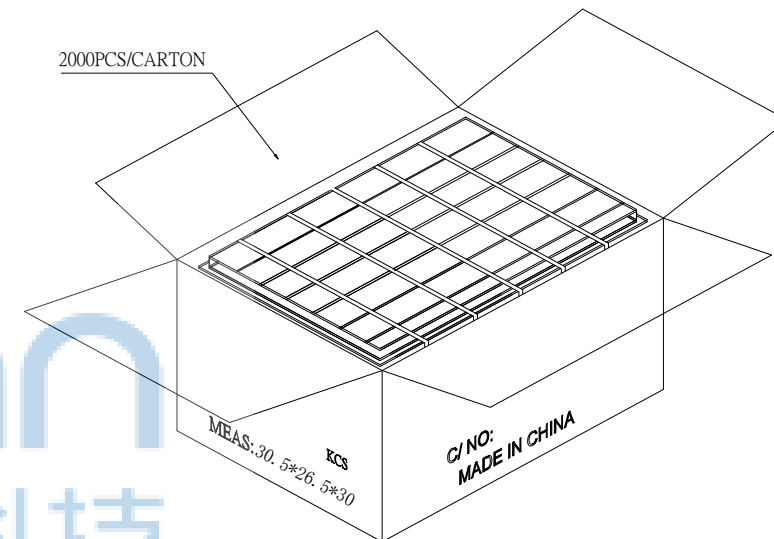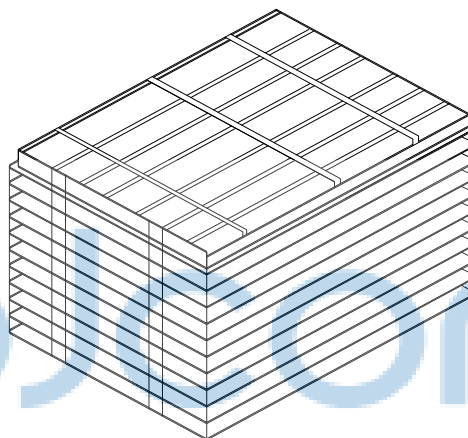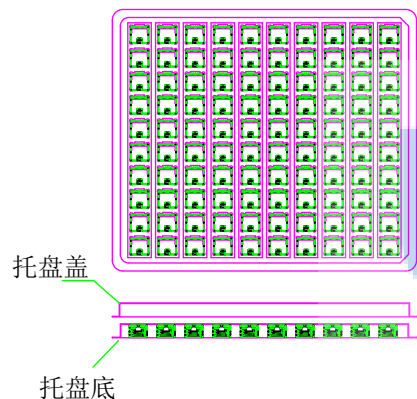

- 4-1 纸箱开口处以透明胶带贴合。
4-2 若有未装满的零数箱, 必须以缓冲材塞满。

- 5-1 外标签贴在外箱侧麦左上角, 环保标签贴在外标签右上角。

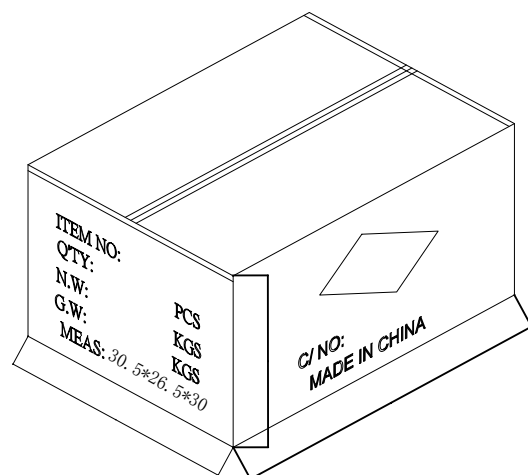

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0409-1	DR. TSP	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"
		NAME: 网络接口 RJ45 1x1 8P8C 沉板4.20 L=15.30 带灯 左绿右黄 无弹 DIP 有壳 盒装	
		APPD. JM_Zheng	PJ. NO.: 131-2K2-080002-H5G
		CHKD. LYX	SIZE: A4 DRW NO.:
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2