

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTE:








1. ELECTRICAL CHARACTERISTICS;

- 1.1 VOLTAGE RATING:125 VAC RMS
- 1.2 CURRENT TATING:1.5AMP
- 1.3 CONTACT RESISTANCE:30 MILLIOHMS MAX
- 1.4 INSULATION RESISTANCE:1000 MEGOHMS MIN
- 1.5 DIELECTRIC STRENGTH:1000V AC RMS 50Hz. 1MIN

2 ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE:-40° C +85° C
- 2.2 RELATIVE HUMIDITYYU:90 95%(40±2° C)

3.标示“▲”符号的尺寸为重点检验尺寸;

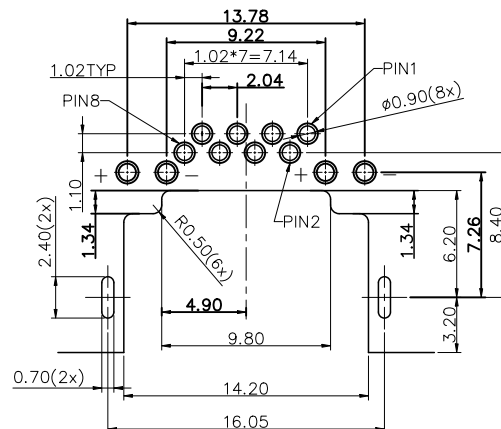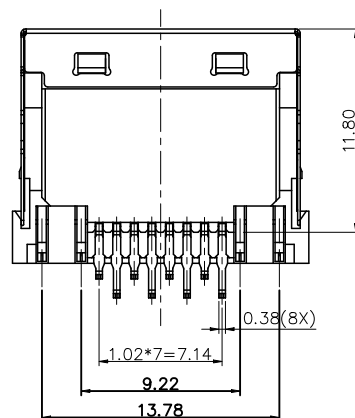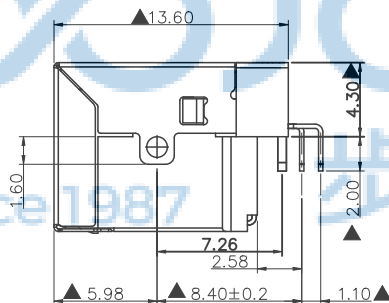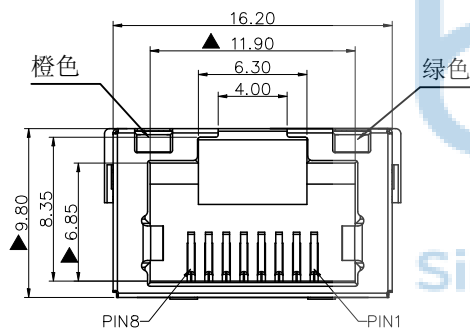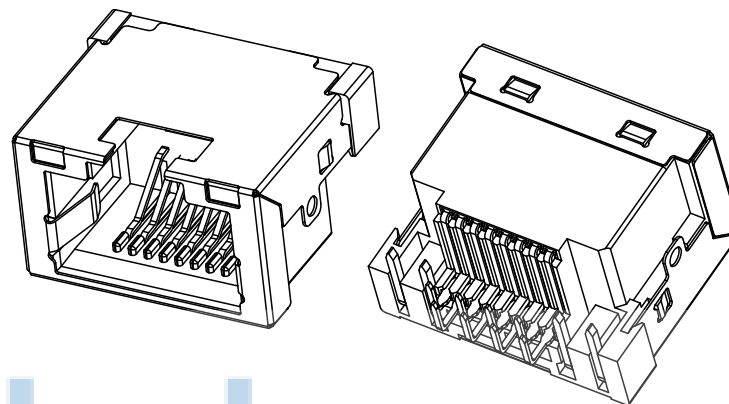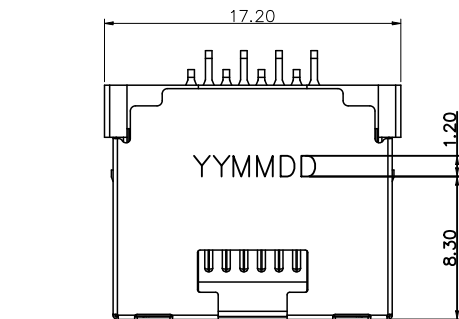

RECOMMENDED PCB LAYOUT

TOLERANCE ±0.05

3	SHELL	1	STAINLESS STEEL	NI PLATED
2	CONTACT	8	PHOSPHOR BRONZE	AU/SN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.



深圳市步步精科技有限公司

.X: ±0.38 X*: ±3*
.XX: ±0.25 .X*: ±2*
.XXX: ±0.13 .XX*: ±1*

NAME: 网络接口 RJ45 1x1 8P8C 沉板5.5 L=13.60
带灯 左橙右绿 无弹 全包 DIP

APPD. JM_Zheng


PJ. NO.: 131-2K2-080003-H5G

CHKD. LYX

SIZE: A4 DRW NO.:

PDWG,NO: 0409-1

FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

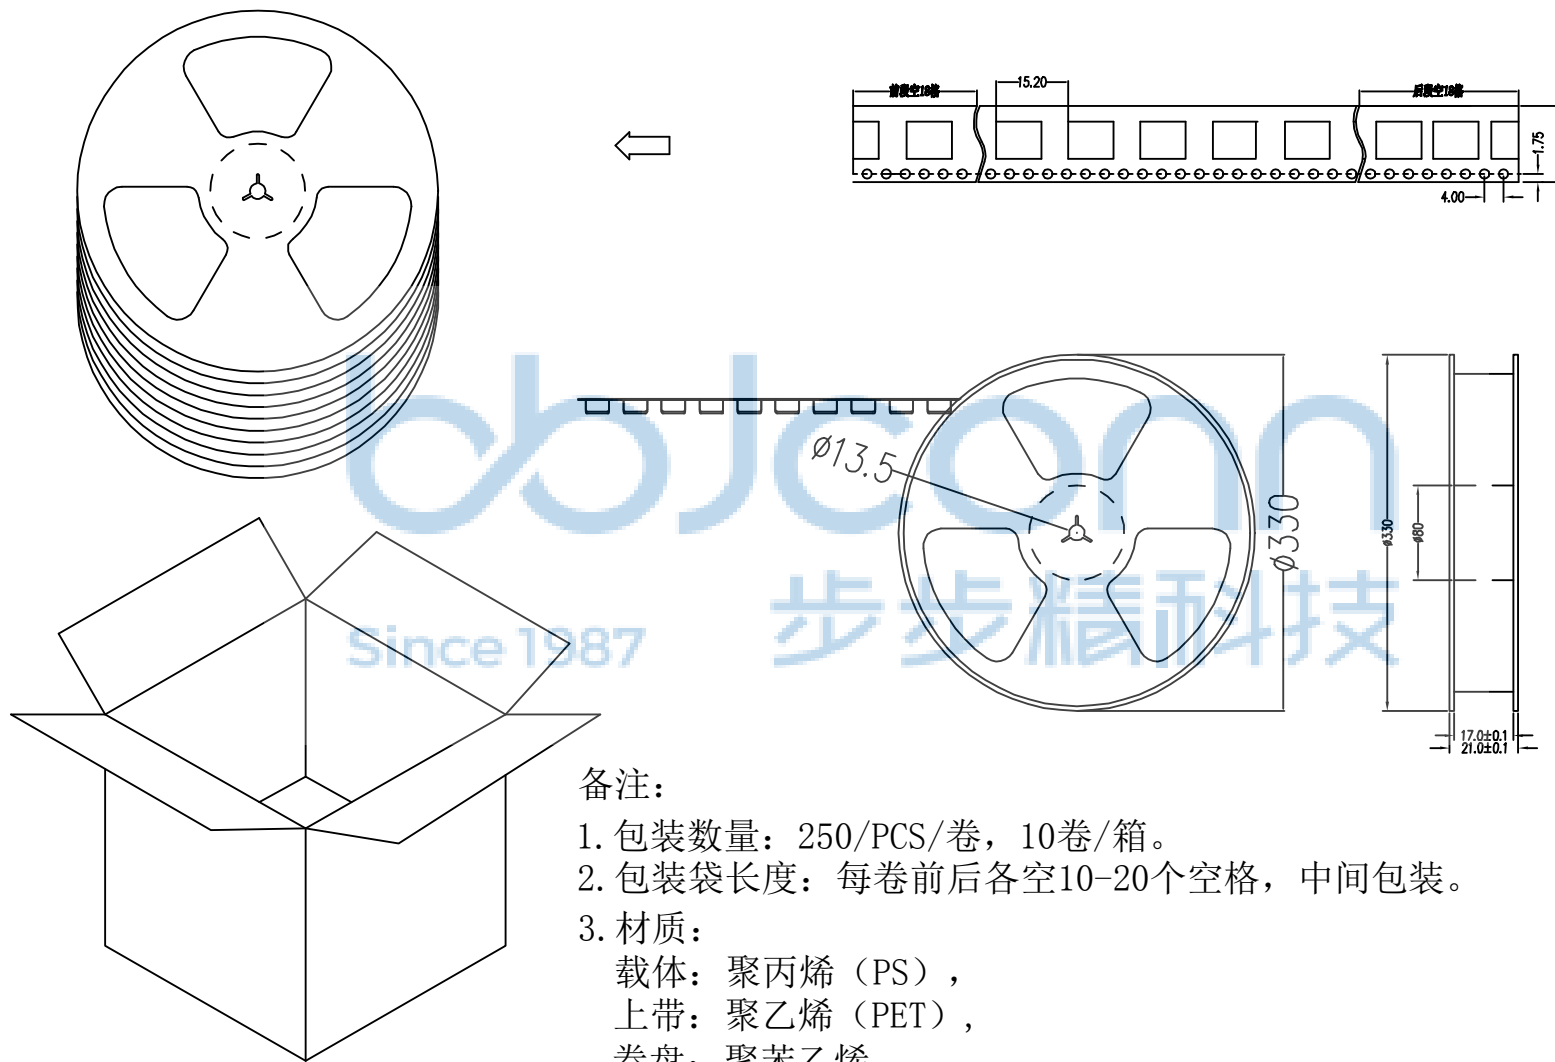

备注:

1. 包装数量: 250/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) ,
上带: 聚乙烯 (PET) ,
卷盘: 聚苯乙烯。

纸箱规格: 345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" XX': ±1"	
APPD.		JM_Zheng	
CHKD.		LYX	
PDWG,NO: 0409-1		DR. TSP	
NAME: 网络接口 RJ45 1x1 8P8C 沉板5.5 L=13.60 带灯 左橙右绿 无弹 全包 DIP		PJ. NO.: 131-2K2-080003-H5G	
		SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	