
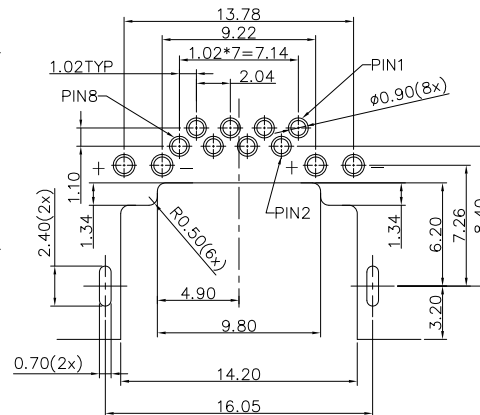
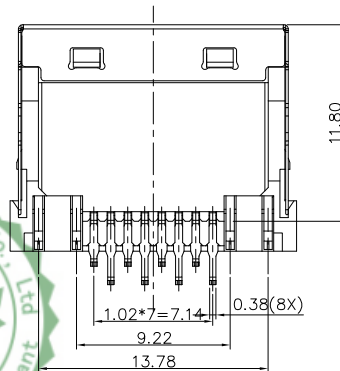
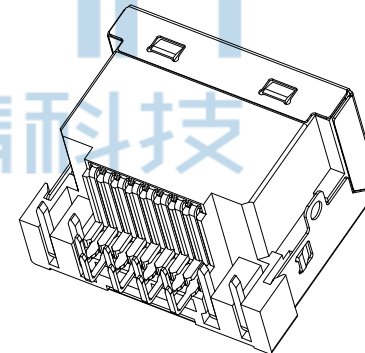


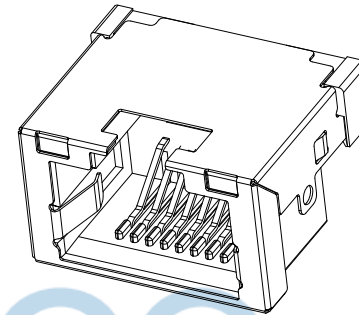
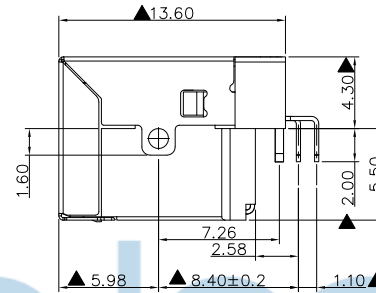


REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

NOTE:

1. ELECTRICAL CHARACTERISTICS;
 - 1.1 VOLTAGE RATING:125 VAC RMS
 - 1.2 CURRENT RATING:1.5AMP
 - 1.3 CONTACT RESISTANCE:30 MILLIOHMS MAX
 - 1.4 INSULATION RESISTANCE:1000 MEGOHMS MIN
 - 1.5 DIELECTRIC STRENGTH:1000V AC RMS 50Hz. 1MIN
- 2 ENVIRONMENTAL:
 - 2.1 TEMPERATURE RANGE:-40° C +85° C
 - 2.2 RELATIVE HUMIDITY:90 95%(40±2° C)
- 3.标示“▲”符号的尺寸为重点检验尺寸;

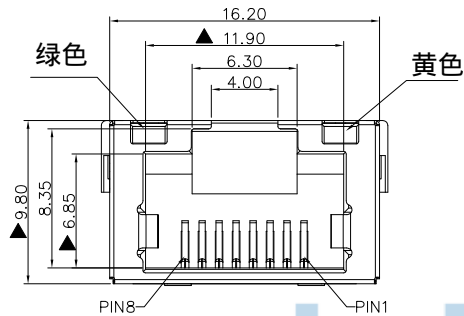

RECOMMENDED PCB LAYOUT

TOLERANCE ±0.05

4.MATERIAL LIST:

3	SHELL	1	STAINLESS STEEL	NI PLATED
2	CONTACT	8	PHOSPHOR BRONZE	AU/SN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK


深圳市步步精科技有限公司

TITLE:

网络接口 RJ45 8P 沉板 5.5 L=13.6 DIP 带灯无弹 左绿右黄 (BRJF08B3N1269)

GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN/		DATE		DESIGN		LYX		SIZE:A4		UNIT:MM.		PART. NO:	
ITEM	MM	INCH													
3 PLACE	±0.15	±0.005													
2 PLACE	0.25	±0.01													
1 PLACE	±0.35	±0.015													
0 PLACE	±0.50	±0.02													
ANGULAR ± 3°															
CHECKED/	DATE	审核	HMY			SCALE: 1:1				PROJECTION				REV.: 版本	
APPROVED/	DATE	核准	LJP			DWG. PATH				0409-1				SHEET: 页码	

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

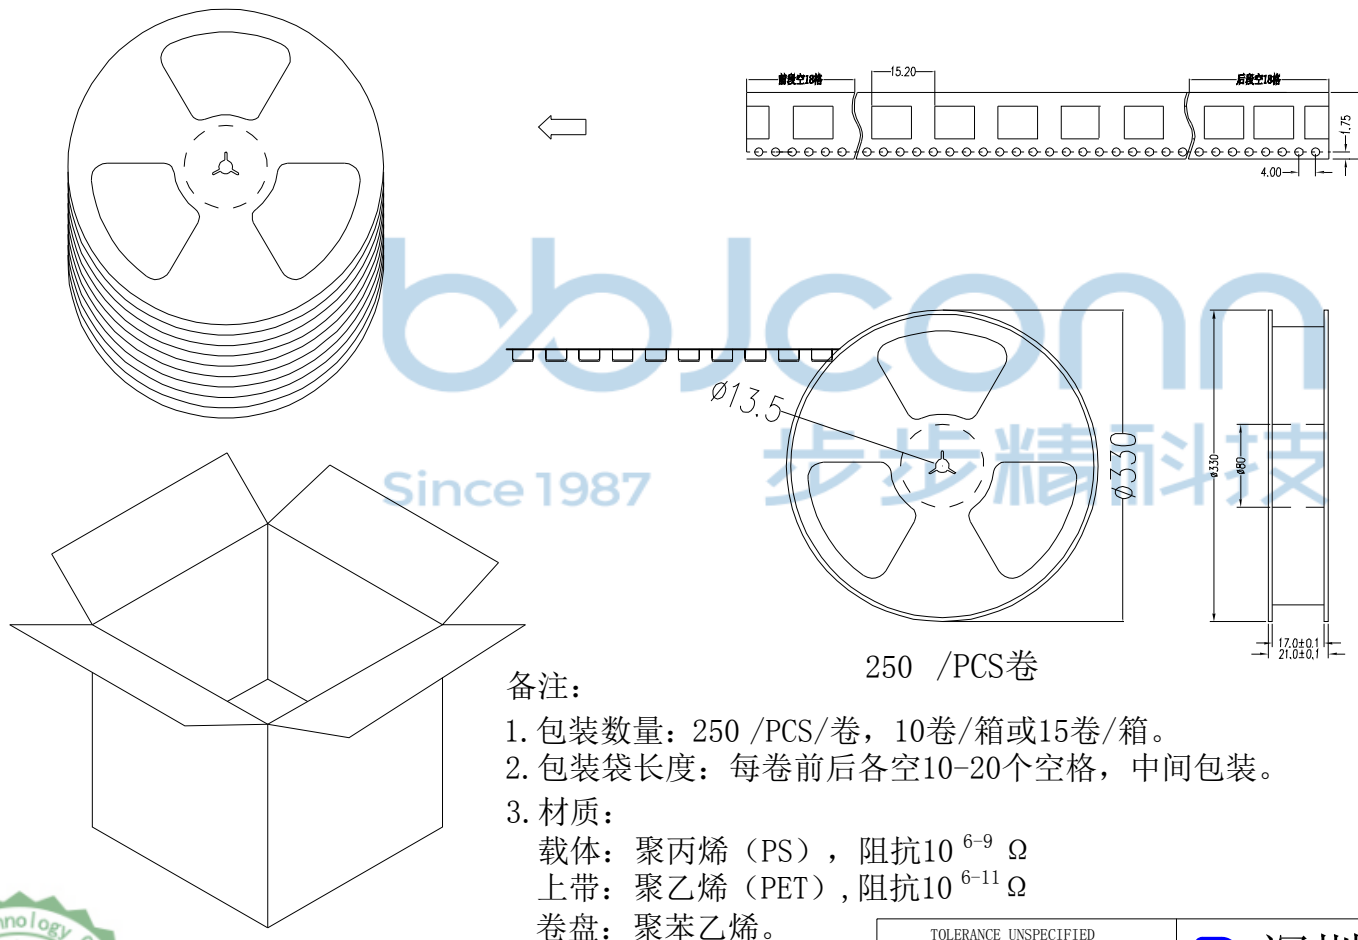

备注:

1. 包装数量: 250 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*350 MM



深圳市步步精科技有限公司

TOLERANCE UNSPECIFIED		深圳市步步精科技有限公司 TITLE: 网络接口 RJ45 8P 沉板5.5 L=13.6 DIP 带灯无弹 左绿右黄 (BRJF08B3N1269)			
.0	±0.35				
.00	±0.25				
.000	±0.15				
X. °	±2.00°				
CUSTOMER DRAWING					
DRAWN/ DATE	设计 LYX	SIZE:A4	UNIT:MM.	PART. NO:	
CHECKED/ DATE	审核 HMY	SCALE: 1:1		PROJECTION	REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0409-1		SHEET: 页码