

REV.	ECN	NO	CONTENT	DATE	ENGINEER
A0			Initial release	/	SGF

MATERIAL:

HOUSING: PA46, PBT, BLACK.
TERMINAL: PHOSPHOR BRONZE Ø0.46MM
G/FU*GOLD PLATING

SHIELD: C2680, T=0.20MM, 20 MIN NICKEL PLATING
NO ALL AREA







MACHANICAL:

DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40 °C~+85 °C.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "±"

VOLTAGE: 125 VOLTS AC.
CURRENT RATING: 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Yellow	568nm	20mA	1.85-2.45V
Green	585nm	20mA	1.7-2.2V

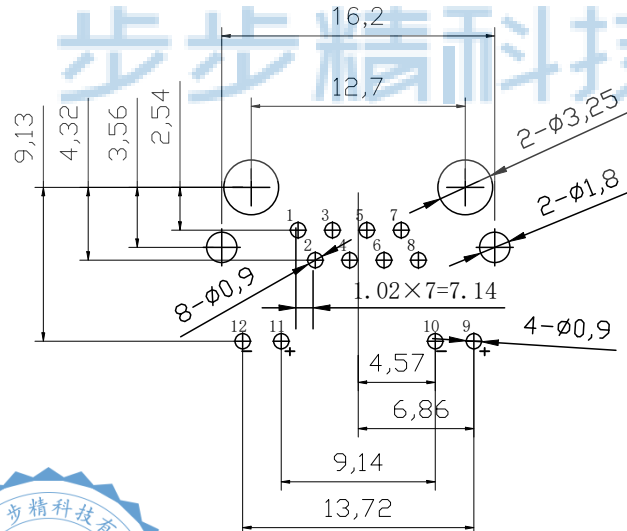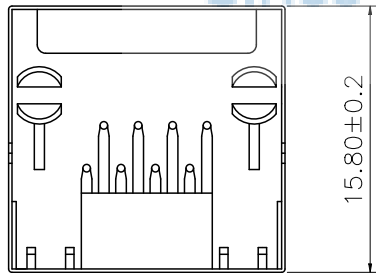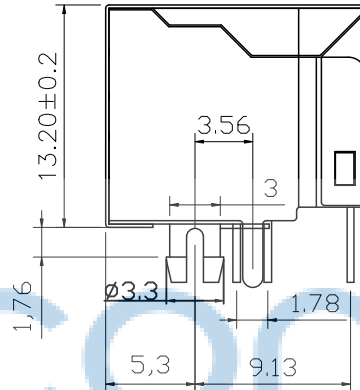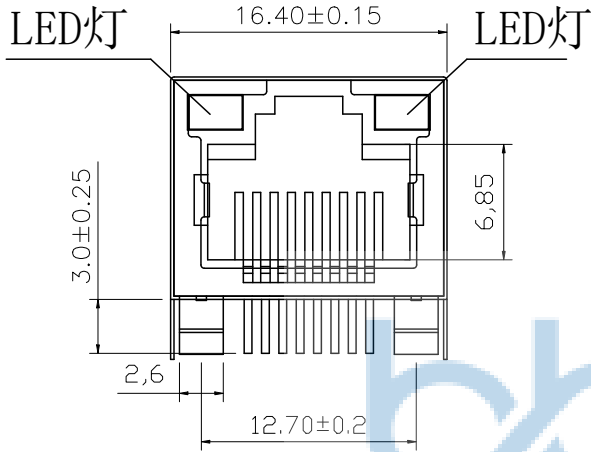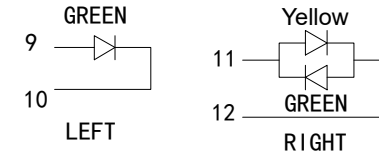

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0067-1

深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 X'': ±2'
.XXX: ±0.13 .XX': ±1'

NAME: 网络接口 RJ45 56LED 1x1 8P8C 90度 L=15.80 全塑
带灯 左橙右黄绿 无弹 带屏蔽 DIP PBT黑色 盒装

APPD. JM_Zheng

CHKD. LYX


DR. SGF

PJ. NO.:

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

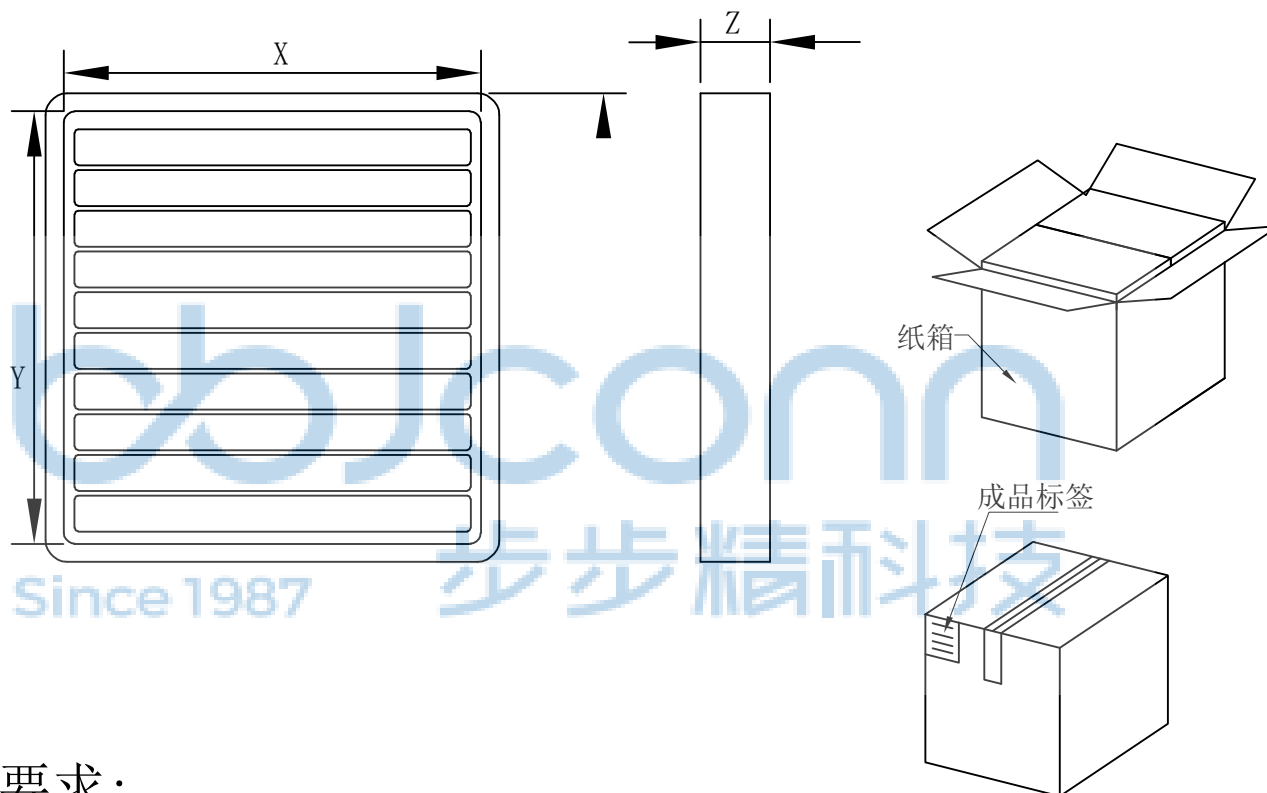

1. 包装要求:

- 1.1 每盒吸塑盒包装60pcs;
- 1.2 每20盘放一箱, 共计1200PCS;
- 1.3 纸箱外贴上标签。

纸箱规格: 350*210*290



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0067-1		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"
APPD.	JM_Zheng	NAME: 网络接口 RJ45 56LED 1x1 8P8C 90度 L=15.80 全塑带灯 左橙右黄绿 无弹 带屏蔽 DIP PBT黑色 盒装	
CHKD.	LYX	P.J. NO.:	
DR.	SGF	SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES	MAT'L: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2