
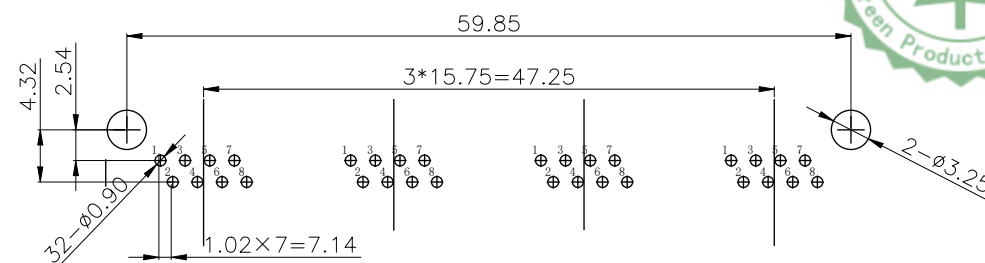


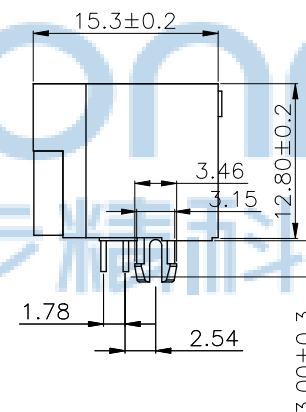
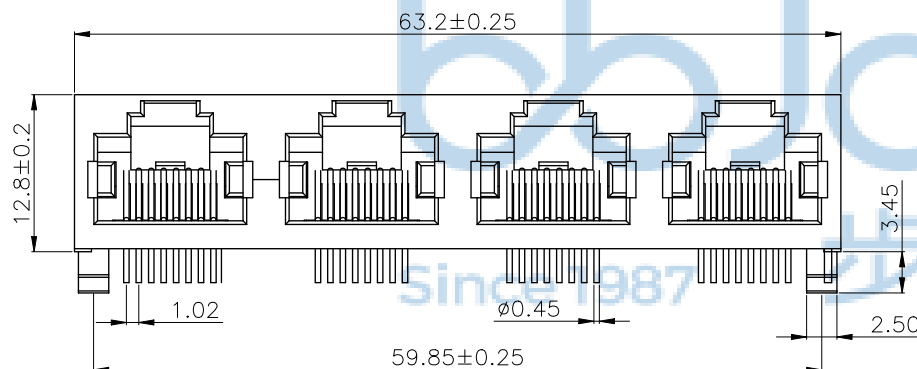


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

MECHANICAL :

1. HOUSING MATERIAL: PBT, **YELLOW**
2. INSERT MATERIAL: PBT, **YELLOW**
3. TERMINAL: PHOSPHOR BRONZE $\phi 0.46\text{MM}$. G/FU" GOLD PLATING
4. OPERATING LIFE: 750 CYCLES MIN
5. MATING/UNMATING FORCE: 30N/3.06KGf MAX
1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30m MAX.
4. INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
5. DIELECTRIC STRENGTH: 1000VAC RMS 50HZ OR 60HZ, 1MIN.
1. STORAGE: -40°C TO $+85^{\circ}\text{C}$
2. OPERATION: -40°C TO $+85^{\circ}\text{C}$

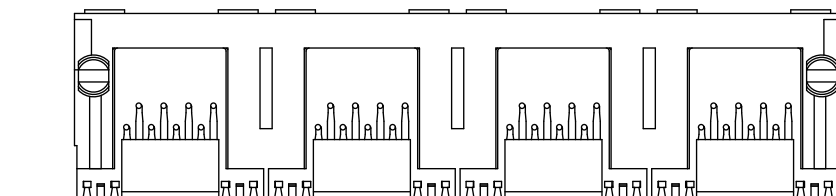

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0067-1

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 X'': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$





APPD JM_Zheng
CHKD LYX

DR SGF

NAME: 网络接口 RJ45 56LED 1x4 8P8C 90度 L=15.30
无灯 无弹 全塑 PBT黄 DIP 带柱 盒装

PJ NO: 131-2K2-080013-T8G
SIZE: A4 DRW NO:

FINISH: SEE NOTES MAT'L: SEE NOTES
SCALE: N/A REV: A0 UNIT: mm PAGE: 1/2

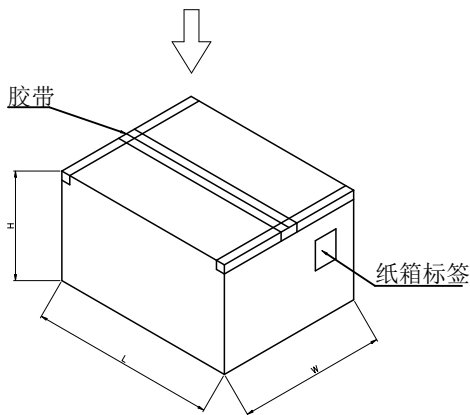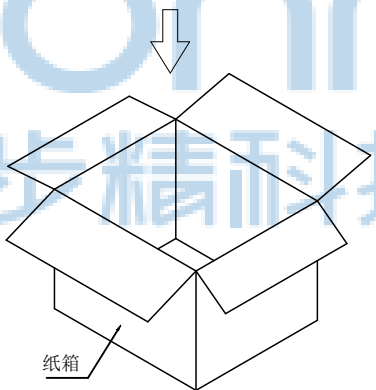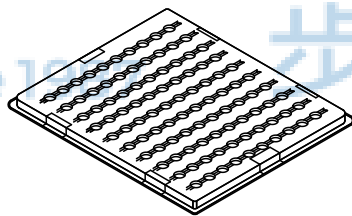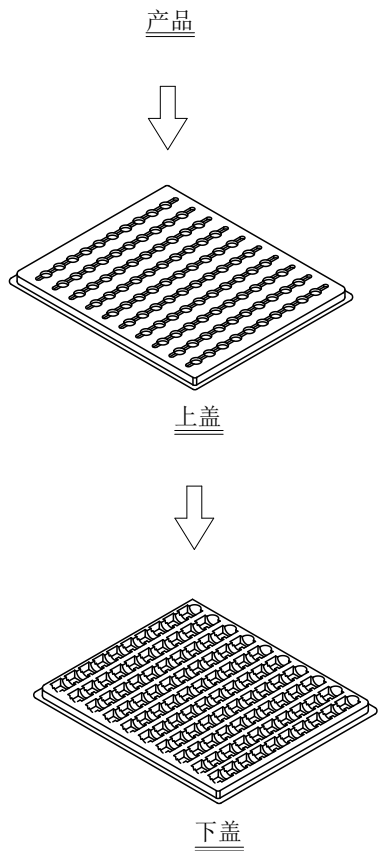

纸箱规格: L530*W325*H240

- 1、包装要求:
- 1.1 每盒吸塑盒包装20pcs;
 - 1.2 每50盘放一箱, 共计1000PCS;
 - 1.3 纸箱外贴上标签。



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0067-1



深圳市步步精科技有限公司

.X: ±0.38 X': ±3"
.XX: ±0.25 .X': ±2"
.XXX: ±0.13 .XX': ±1"

APPD JM_Zheng

CHKD LYX

DR

SGF

NAME: 网络接口 RJ45 56LED 1x4 8P8C 90度 L=15.30
无灯 无弹 全塑 PBT黄 DIP 带柱 盒装

PJ NO: 131-2K2-080013-T8G

SIZE:A4 DRW NO:

FINISH:SEE NOTES

SCALE:N/A

MAT'L:SEE NOTES

UNIT:mm

PAGE:2/2