


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				





MATERIAL:
HOUSING: PBT PA46, BLACK
TERMINAL: PHOSPHOR BRONZE Ø0.46MM
G/FU" GOLD PLATING

MACHANICAL:
DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40 °C ~ +85 °C.
STORAGE TEMPERATURE: -40°C ~ +85°C.
ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ OR 60HZ, 1 MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.



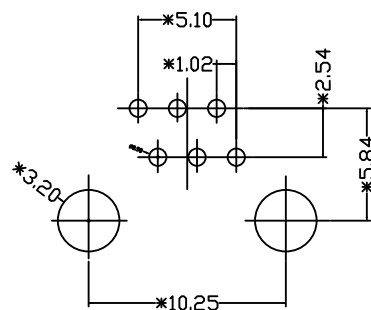


PCB LAYOUT
THICKNESS=1.6mm

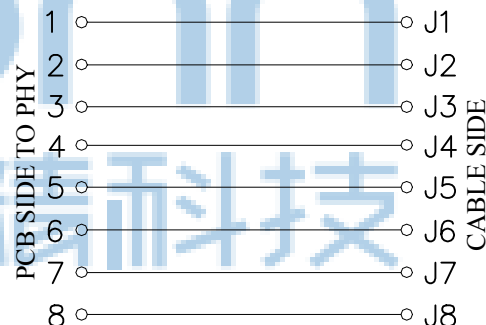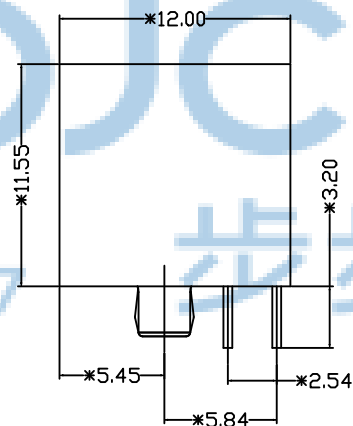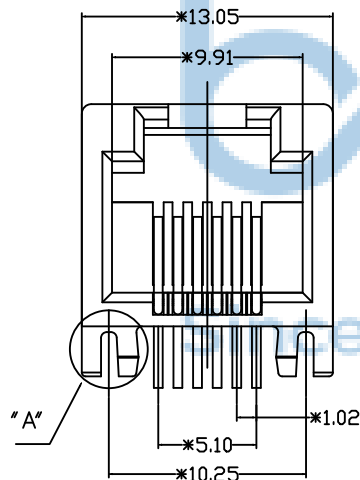

DETAIL A
SCALE 2:1

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	NAME网络接口 RJ45 6P6C 1x1 90度 L=12.0 无灯 无弹 全塑 PA46黑色耐高温料 DIP 定制款	
APPD. JM_Zheng	CHKD. TSP	PJ. NO.: 131-2K2-060002-T8G SIZE: A4 DRW NO.:	
DR. LYX		FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/2	
PDWG.NO: 0067-1			

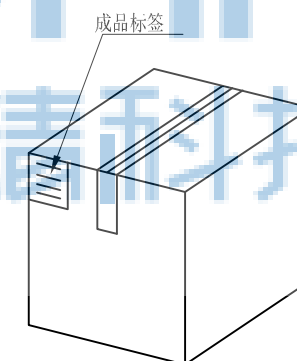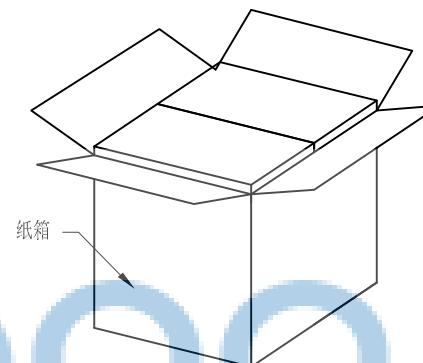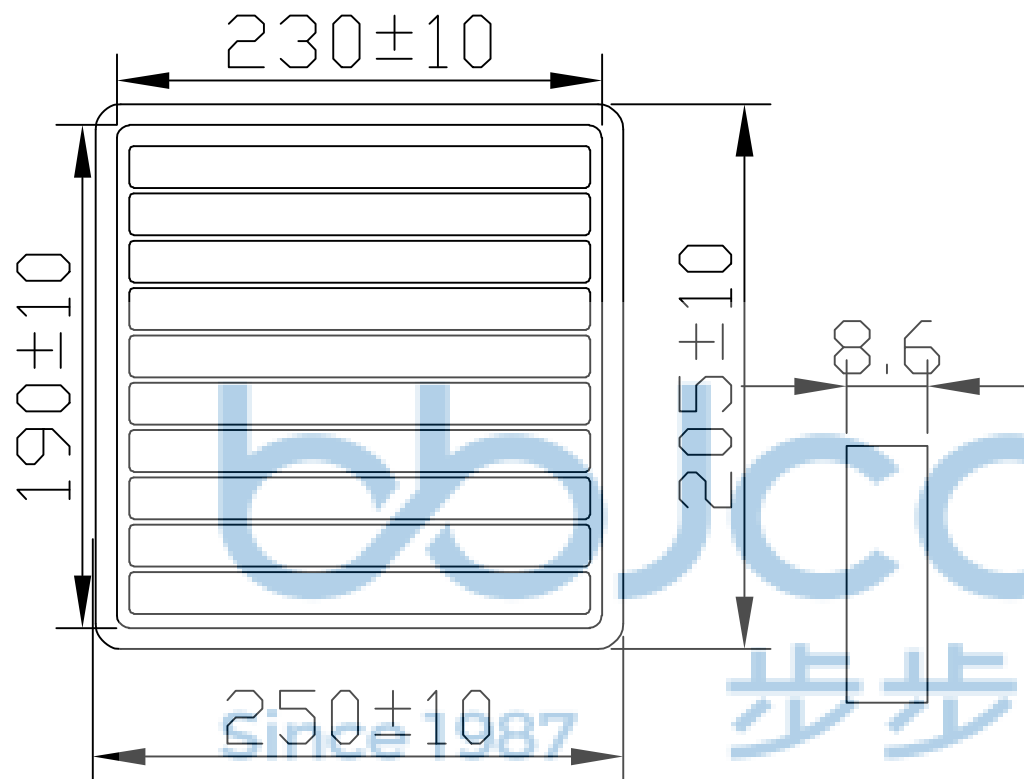

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装**120PCS**;
- 1.2 每**48**盘放一箱, 共计**5760PCS**;
- 1.3 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38	X': ±3"	NAME:网络接口 RJ45 6P6C 1x1 90度 L=12.0	
.XX: ±0.25	.X': ±2"	无灯 无弹 全塑 PA46黑色耐高温料 DIP 定制款	
.XXX: ±0.13	.XX': ±1"	APPD. JM_Zheng	PJ. NO.: 131-2K2-060002-T8G
PDWG.NO: / 0067-1	CHKD. TSP	SIZE: A4	DRW NO.:
	DR. LYX	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A3 UNIT: mm PAGE: 2/2