







REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

MECHANICAL :

1. HOUSING MATERIAL: PBT, PA46, BLACK
2. INSERT MATERIAL: PBT, PA46, BLACK
3. TERMINAL: PHOSPHOR BRONZE $\phi 0.46\text{MM}$. G/FU" GOLD PLATING
4. SHIELD: BRASS T=0.2mm PLATED NICKEL 30u" Min
5. OPERATING LIFE: 750 CYCLES MIN
6. MATING/UNMATING FORCE: 30N/3.06KGf MAX
1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30m MAX.
4. INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
5. DIELECTRIC STRENGTH: 1000VAC RMS 50HZ OR 60HZ, 1MIN.
1. STORAGE: -40°C TO $+85^{\circ}\text{C}$
2. OPERATION: -40°C TO $+85^{\circ}\text{C}$
3. The mark with "*" is key inspection dimension for QC

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Yellow	568nm	20mA	1.85-2.45V
Green	585nm	20mA	1.7-2.2V

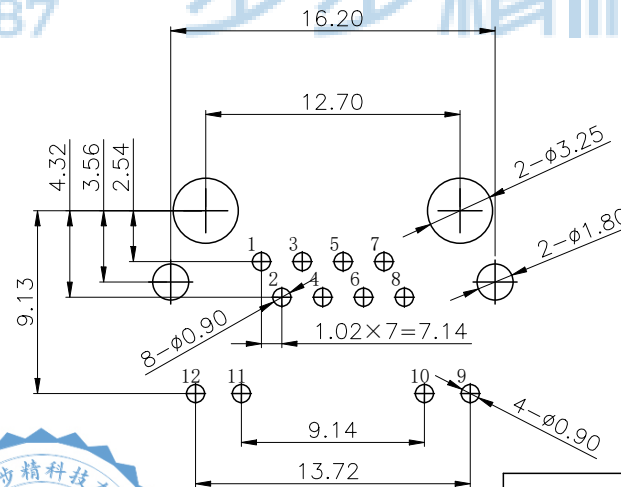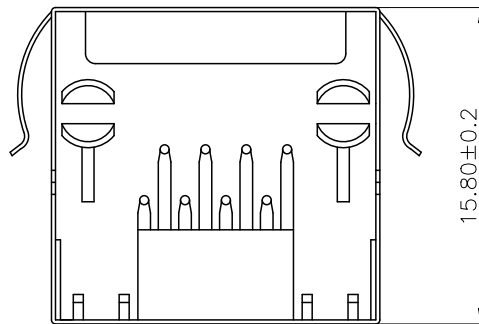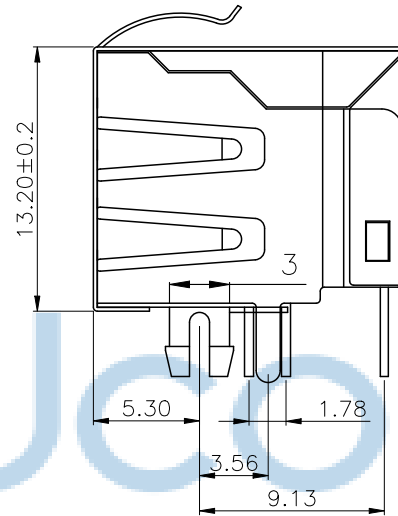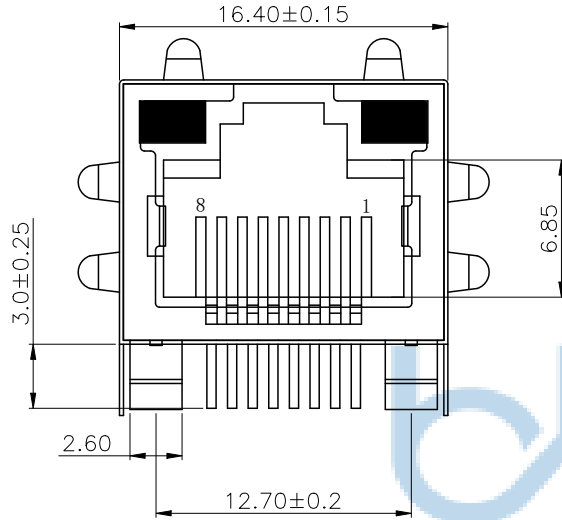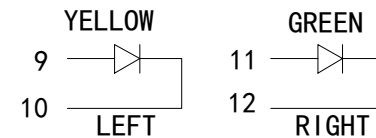

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0067-1

深圳市步步精科技有限公司

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

X*: ±3"
.X*: ±2"
.XX*: ±1"

NAME: 网络接口 RJ45 56LED 1x1 8P8C 90度 L=15.80
带灯 左黄右绿 带弹 带屏蔽 DIP PBT黑色 盒装

APPD JM_Zheng

CHKD LYX


DR SGF

PJ NO: 131-2K2-080015-T8G


SIZE: A4 DRW NO:

FINISH: SEE NOTES MAT'L: SEE NOTES
SCALE: N/A REV: A0 UNIT: mm PAGE: 1/2


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

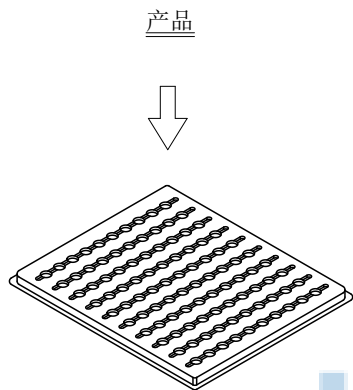


上盖

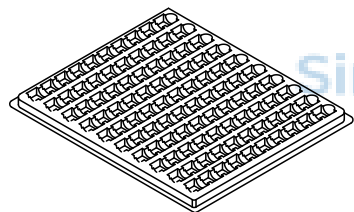

下盖

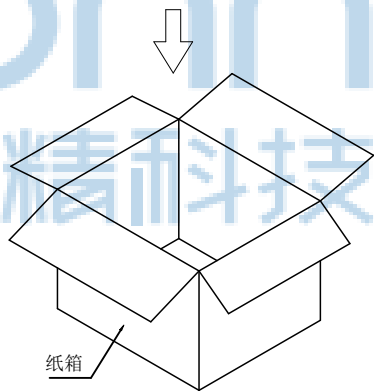

纸箱

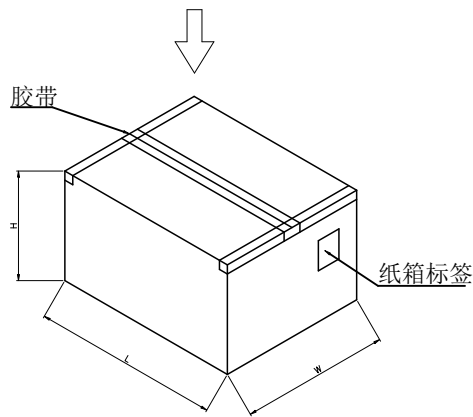

纸箱规格: L510*W375*H230

1、包装要求:

- 1.1 每盒吸塑盒包装60pcs;
- 1.2 每50盘放一箱, 共计3000PCS;
- 1.3 纸箱外贴上标签。



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0067-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR

SGF

NAME:网络接口 RJ45 56LED 1x1 8P8C 90度 L=15.80
带灯 左黄右绿 带弹 带屏蔽 DIP PBT黑色 盒装

PJ NO: 131-2K2-080015-T8G

SIZE:A4 DRW NO:

FINISH:SEE NOTES

SCALE:N/A

MAT'L:SEE NOTES

UNIT:mm

PAGE:2/2