


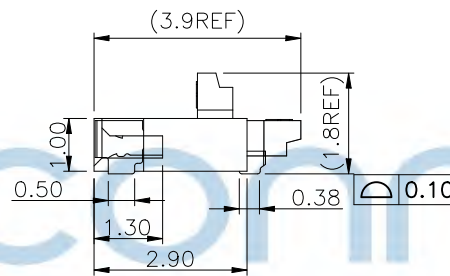





REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

Note:

- Material:
 - Housing: thermoplastic high temp.UL94V-0;
 - Latch: thermoplastic high temp.UL94V-0;
 - Terminal: copper alloy.
 - Fitting Nail: copper alloy.
- Finish:
 - Terminal:
 - 50~100u" Nickel under plating over all
 - Gold Flash on contact and Solder
 - 3u" Gold on contact and Gold Flash on Solder
 - 5u" Gold on contact and Gold Flash on Solder
 - Fitting Nail:
 - 50~100u" Nickel under plating over all
 - 80~150u" Matte tin over all
- Product must comply HF RoHS specification.

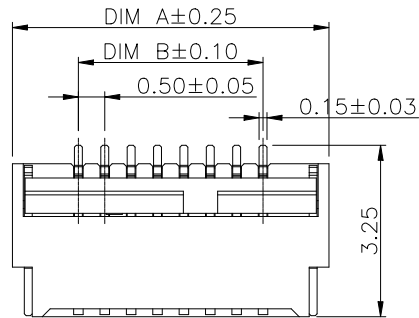





CKTS	DIM A	DIM B	DIM C	DIM D
4	4.00	1.50	2.57	3.40
5	4.50	2.00	3.07	3.90
6	5.00	2.50	3.57	4.40
7	5.50	3.00	4.07	4.90
8	6.00	3.50	4.57	5.40
9	6.50	4.00	5.07	5.90
10	7.00	4.50	5.57	6.40
12	8.00	5.50	6.57	7.40
14	9.00	6.50	7.57	8.40
16	10.00	7.50	8.57	9.40
18	11.00	8.50	9.57	10.40
20	12.00	9.50	10.57	11.40
22	13.00	10.50	11.57	12.40
24	14.00	11.50	12.57	13.40
26	15.00	12.50	13.57	14.40
28	16.00	13.50	14.57	15.40
30	17.00	14.50	15.57	16.40
32	18.00	15.50	16.57	17.40
34	19.00	16.50	17.57	18.40
36	20.00	17.50	18.57	19.40
38	21.00	18.50	19.57	20.40
40	22.00	19.50	20.57	21.40
42	23.00	20.50	21.57	22.40
45	24.50	22.00	23.07	23.90
50	27.00	24.50	25.57	26.40

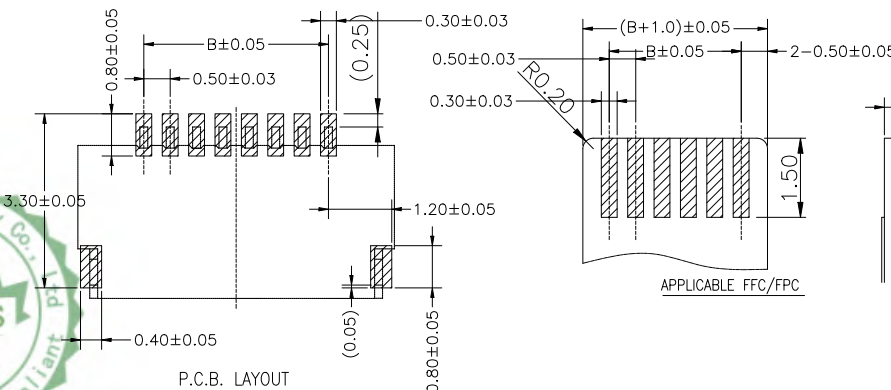


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程 部	
.X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: FPC 0.5-4P 后翻式 镀金1u H=1.0	
APPD	JM_Zheng	PJ NO: 130-221-040005-W3G	
CHKD	Tang	SIZE:A4 DRW NO:	
PDWG NO: 0407-1	DR LYX	FINISH:SEE NOTES MAT'L:SEE NOTES	
		SCALE:N/A REV:A0 UNIT:mm PAGE:1/2	

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE: $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.30 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 32.40METERS.
7. COMPONENT LOAD PER 13" REEL : 4000PCS.
8. PEELING OFF FORCE OF TOP TAPE $0.1\text{N} \sim 0.7\text{N}$ (10.2gf~71.4gf).

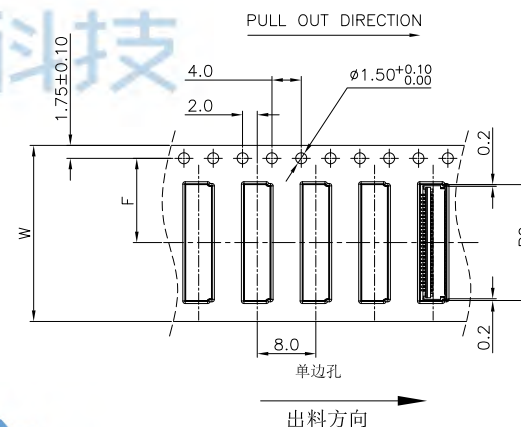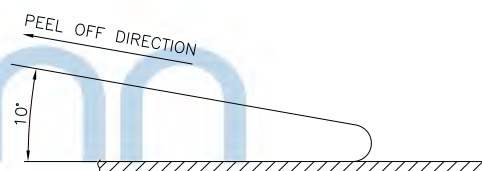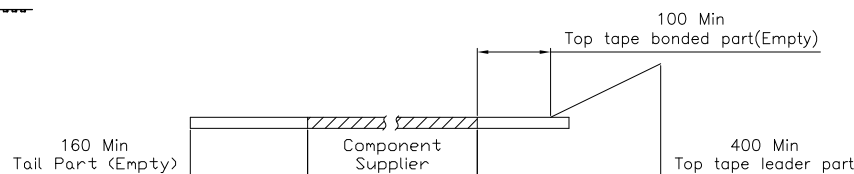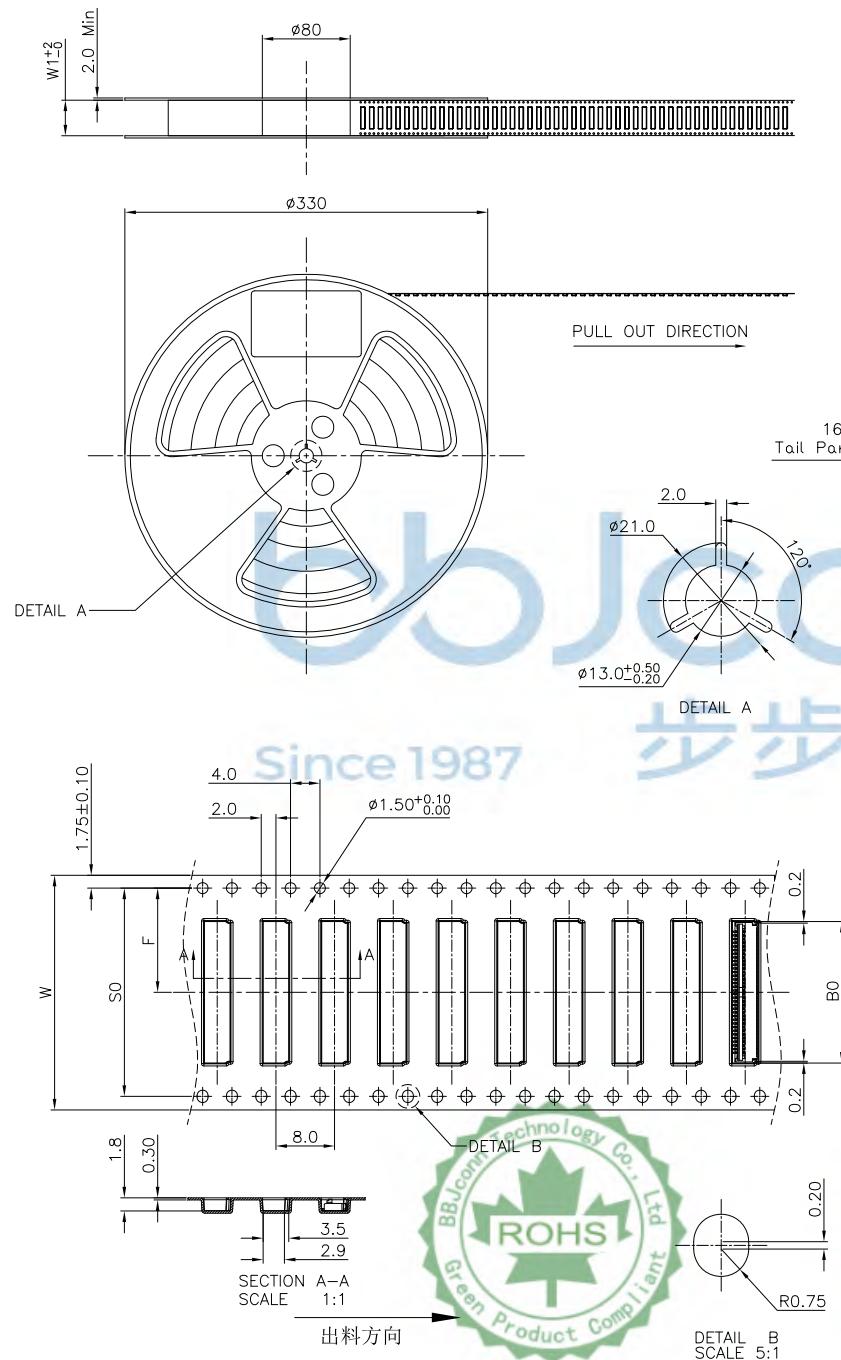

CKTS FOR 1.0 PITCH	CKTS FOR 0.5 PITCH	B0 ± 0.10	W	W1	F ± 0.10	S0 ± 0.10
	4	4.30				
	5	4.80				
	6	5.30				
	7	5.80				
	8	6.30				
4	9	6.80	16 $\pm 0.3 / -0$	16.4	7.5	
5	10	7.30				
6	11	7.80				
7	12	8.30				
8	13	8.80				
9	14	9.30				
10	15	9.80				
11	16	10.30				
12	17	10.80				
13	18	11.30				
14	19	11.80				
15	20	12.30	24 $\pm 0.3 / -0$	24.4	11.5	
16	21	12.80				
17	22	13.30				
18	23	13.80				
19	24	14.30				
20	25	14.80				
21	26	15.30				
22	27	15.80				
23	28	16.30				
24	29	16.80				
25	30	17.30				
26	31	17.80				
27	32	18.30				
28	33	18.80				
29	34	19.30	32 ± 0.30	32.4	14.2	28.4
30	35	19.80				
31	36	20.30				
32	37	20.80				
33	38	21.30				
34	39	21.80				
35	40	22.30				
36	41	22.80				
37	42	23.30				
38	43	23.80				
39	44	24.30				
40	45	24.80	44 ± 0.35	44.4	20.2	40.4
41	46	25.30				
42	47	25.80				
43	48	26.30				
44	49	26.80				
45	50	27.30				



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ± 0.38 .X': $\pm 3'$.XX: ± 0.25 .X': $\pm 2'$.XXX: ± 0.13 .X': $\pm 1'$		NAME: FPC 0.5-4P 后翻式 镀金1u H=1.0	
APPD	JM_Zheng	PJ NO: 130-221-040005-W3G		SIZE:A4 DRW NO:	
CHKD	Tang	FINISH:SEE NOTES		MAT'L:SEE NOTES	
PDWG NO: 0407-1	DR	LYX	SCALE:N/A	REV:A0	UNIT:mm
				PAGE: 2/2	