



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	ZY






SECTION A-A
SCALE 1:1


- Note:
- Material:
 - Housing: thermoplastic high temp.UL94V-0; Color: natural.
 - Latch: thermoplastic high temp.UL94V-0; Color: black.
 - Terminal: copper alloy.
 - Fitting Nail: copper alloy.
 - Finish:
 - Terminal:
 - 50u" Min Nickel under plating over all
 - Gold Flash on contact and Solder
 - K:3u" Gold on contact and Gold Flash on Solder
 - Fitting Nail:
 - 50u" Min Nickel under plating over all
 - 80u" Min Matte tin over all
 - Product must comply HF RoHS specification.

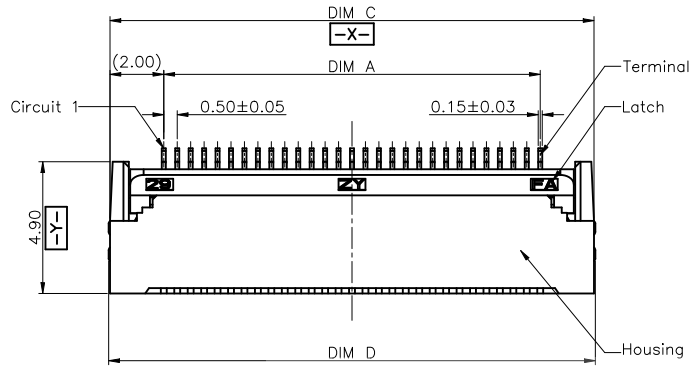

CKTS	DIM A	DIM B	DIM C	DIM D
1	1.50	2.60	5.50	5.60
5	2.00	3.10	6.00	6.10
6	2.50	3.60	6.50	6.60
7	3.00	4.10	7.00	7.10
8	3.50	4.60	7.50	7.60
9	4.00	5.10	8.00	8.10
10	4.50	5.60	8.50	8.60
11	5.00	6.10	9.00	9.10
12	5.50	6.60	9.50	9.60
13	6.00	7.10	10.00	10.10
14	6.50	7.60	10.50	10.60
15	7.00	8.10	11.00	11.10
16	7.50	8.60	11.50	11.60
17	8.00	9.10	12.00	12.10
18	8.50	9.60	12.50	12.60
19	9.00	10.10	13.00	13.10
20	9.50	10.60	13.50	13.60
21	10.00	11.10	14.00	14.10
22	10.50	11.60	14.50	14.60
23	11.00	12.10	15.00	15.10
24	11.50	12.60	15.50	15.60
25	12.00	13.10	16.00	16.10
26	12.50	13.60	16.50	16.60
27	13.00	14.10	17.00	17.10
28	13.50	14.60	17.50	17.60
29	14.00	15.10	18.00	18.10
30	14.50	15.60	18.50	18.60
31	15.00	16.10	19.00	19.10
32	15.50	16.60	19.50	19.60
33	16.00	17.10	20.00	20.10
34	16.50	17.60	20.50	20.60
35	17.00	18.10	21.00	21.10
36	17.50	18.60	21.50	21.60
37	18.00	19.10	22.00	22.10
38	18.50	19.60	22.50	22.60
39	19.00	20.10	23.00	23.10
40	19.50	20.60	23.50	23.60
41	20.00	21.10	24.00	24.10
42	20.50	21.60	24.50	24.60
43	21.00	22.10	25.00	25.10
44	21.50	22.60	25.50	25.60
45	22.00	23.10	26.00	26.10
46	22.50	23.60	26.50	26.60
47	23.00	24.10	27.00	27.10
48	23.50	24.60	27.50	27.60
49	24.00	25.10	28.00	28.10
50	24.50	25.60	28.50	28.60
51	25.00	26.10	29.00	29.10
52	25.50	26.60	29.50	29.60
53	26.00	27.10	30.00	30.10
54	26.50	27.60	30.50	30.60
55	27.00	28.10	31.00	31.10
56	27.50	28.60	31.50	31.60
57	28.00	29.10	32.00	32.10
58	28.50	29.60	32.50	32.60
59	29.00	30.10	33.00	33.10
60	29.50	30.60	33.50	33.60

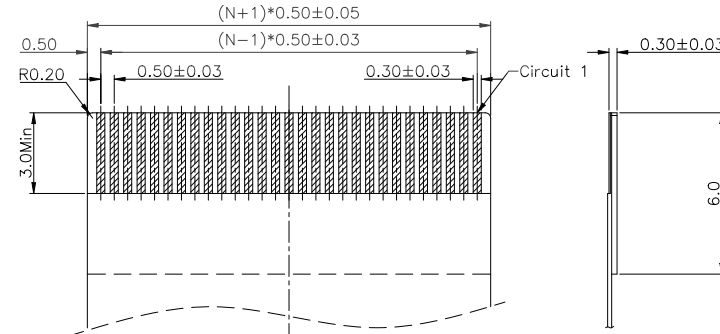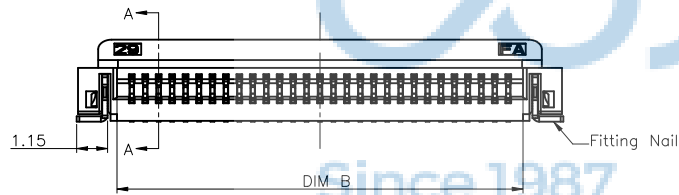

RECOMMENDED FPC/FFC DIMENSION

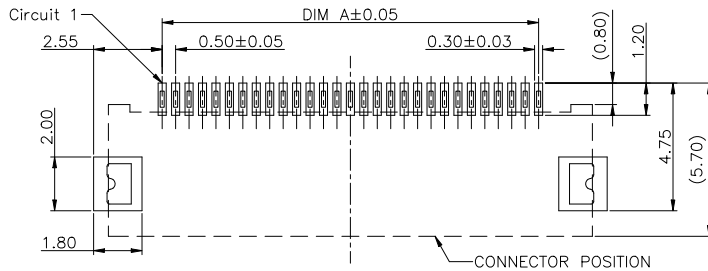

RECOMMENDED P.C.B PATTERN LAYOUT









THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: FPC 0.5-60P 后翻式 H=2.0	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" XX': ±1"		APPD. JM_Zheng CHKD. LYX DR. ZY	
PDWG.NO: 0407-1		PJ. NO.: 130-221-600003-W3G SIZE: A4 FINISH: SEE NOTES SCALE: N/A		MAT'L: SEE NOTES REV.: A0 UNIT: mm PAGE: 1/2	

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY



NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE. $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.35 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 18.60METERS.
7. COMPONENT LOAD PER 13" REEL : 1500PCS.
8. PEELING OFF FORCE OF TOP TAPE 0.1N~0.7N(10.2gf~71.4gf).

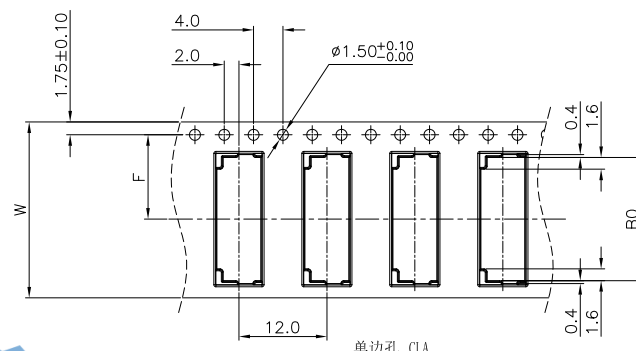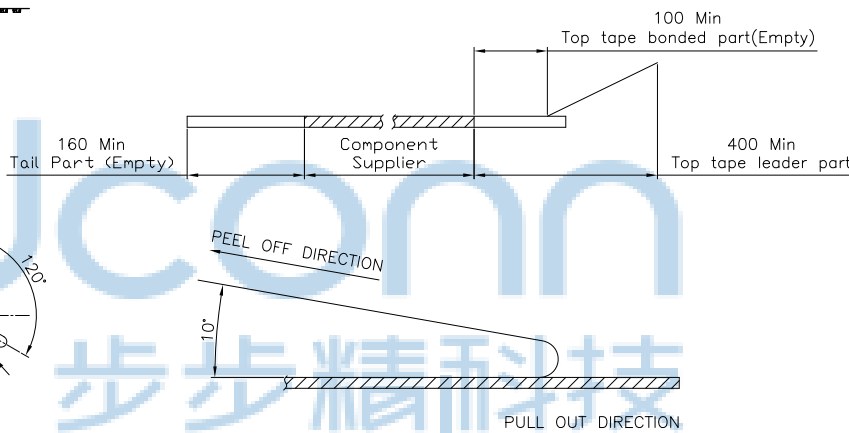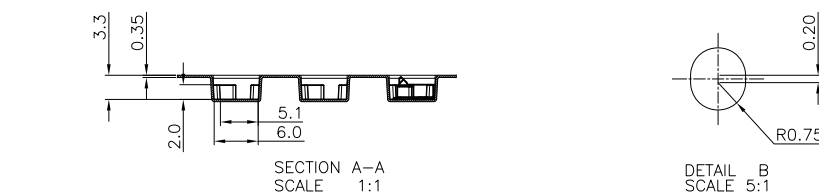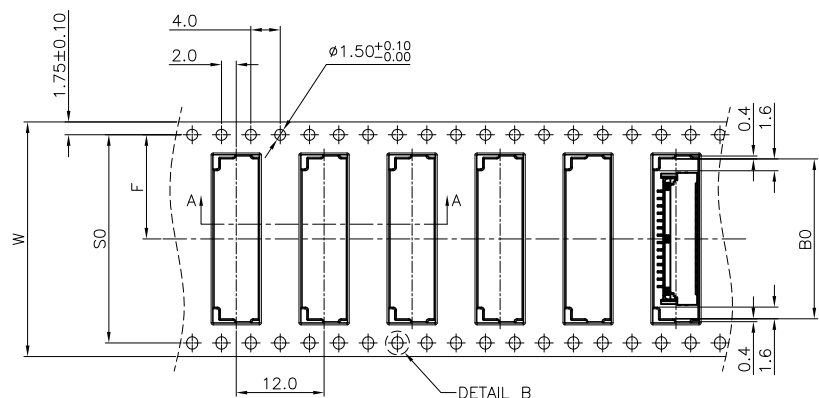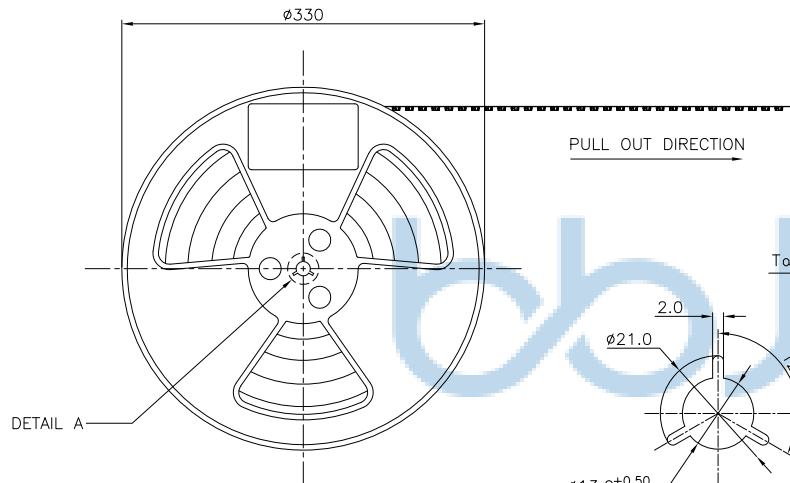

QXTS For 1.0Pitch Conn.	QXTS For 0.5Pitch Conn.	0.5±0.10	W	W1	F	SH±0.30
1	1	5.80				
2	2	6.30				
3	3	6.80				
4	4	7.30				
5	5	7.80				
6	6	8.30				
7	7	8.80				
8	8	9.30				
9	9	9.80				
10	10	10.30				
11	11	10.80				
12	12	11.30				
13	13	11.80				
14	14	12.30				
15	15	12.80				
16	16	13.30				
17	17	13.80				
18	18	14.30				
19	19	14.80				
20	20	15.30				
21	21	15.80				
22	22	16.30				
23	23	16.80				
24	24	17.30				
25	25	17.80				
26	26	18.30				
27	27	18.80				
28	28	19.30				
29	29	19.80				
30	30	20.30				
31	31	20.80				
32	32	21.30				
33	33	21.80				
34	34	22.30				
35	35	22.80				
36	36	23.30				
37	37	23.80				
38	38	24.30				
39	39	24.80				
40	40	25.30				
41	41	25.80				
42	42	26.30				
43	43	26.80				
44	44	27.30				
45	45	27.80				
46	46	28.30				
47	47	28.80				
48	48	29.30				
49	49	29.80				
50	50	30.30				
51	51	30.80				
52	52	31.30				
53	53	31.80				
54	54	32.30				
55	55	32.80				
56	56	33.30				
57	57	33.80				
58	58	34.30				
59	59	34.80				
60	60	35.30				

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0407-1

深圳市步步精科技有限公司

NAME: FPC 0.5-60P 后翻式 H=2.0

PJ. NO.: 130-221-600003-W3G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2 / 2

