



Note:

1. Material:

1.1 Housing: thermoplastic high temp.UL94V-0; Color: natural.

1.2 Terminal: copper alloy.

1.3 Fitting Nail: copper alloy.

2. Finsh:

2.1 Terminal:

Underplating: Au/matt Tin overall.



2.2 Fitting Nail:

Underplating: matt Tin overall.




3. Product must comply HF RoHS specification.

REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF


CKTS	DIM A	DIM B	DIM C	DIM D
6	2.50	4.50	3.60	6.00
7	3.00	5.00	4.10	6.50
8	3.50	5.50	4.60	7.00
9	4.00	6.00	5.10	7.50
10	4.50	6.50	5.60	8.00
11	5.00	7.00	6.10	8.50
12	5.50	7.50	6.60	9.00
13	6.00	8.00	7.10	9.50
14	6.50	8.50	7.60	10.00
15	7.00	9.00	8.10	10.50
16	7.50	9.50	8.60	11.00
17	8.00	10.00	9.10	11.50
18	8.50	10.50	9.60	12.00
19	9.00	11.00	10.10	12.50
20	9.50	11.50	10.60	13.00
21	10.00	12.00	11.10	13.50
22	10.50	12.50	11.60	14.00
23	11.00	13.00	12.10	14.50
24	11.50	13.50	12.60	15.00
25	12.00	14.00	13.10	15.50
26	12.50	14.50	13.60	16.00
27	13.00	15.00	14.10	16.50
28	13.50	15.50	14.60	17.00
29	14.00	16.00	15.10	17.50
30	14.50	16.50	15.60	18.00
31	15.00	17.00	16.10	18.50
32	15.50	17.50	16.60	19.00
33	16.00	18.00	17.10	19.50
34	16.50	18.50	17.60	20.00
35	17.00	19.00	18.10	20.50
36	17.50	19.50	18.60	21.00
37	18.00	20.00	19.10	21.50
38	18.50	20.50	19.60	22.00
39	19.00	21.00	20.10	22.50
40	19.50	21.50	20.60	23.00
41	20.00	22.00	21.10	23.50
42	20.50	22.50	21.60	24.00
43	21.00	23.00	22.10	24.50
44	21.50	23.50	22.60	25.00
45	22.00	24.00	23.10	25.50
46	22.50	24.50	23.60	26.00
47	23.00	25.00	24.10	26.50
48	23.50	25.50	24.60	27.00
49	24.00	26.00	25.10	27.50
50	24.50	26.50	25.60	28.00

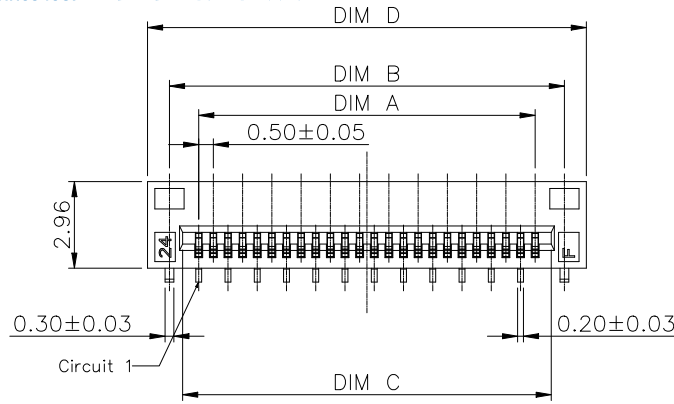

SECTION A-A
SCALE 1:1

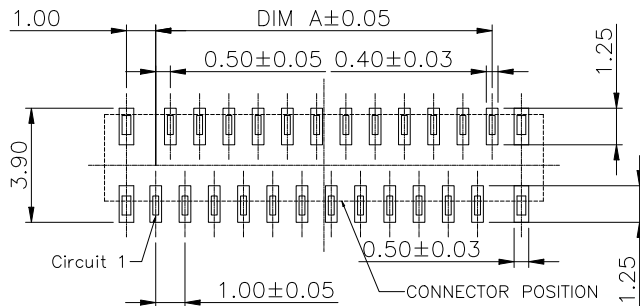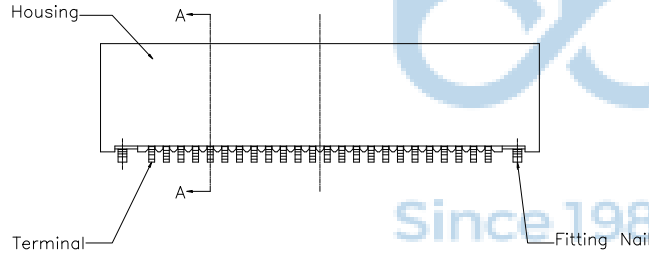

RECOMMENDED P.C.B. PATTERN LAYOUT

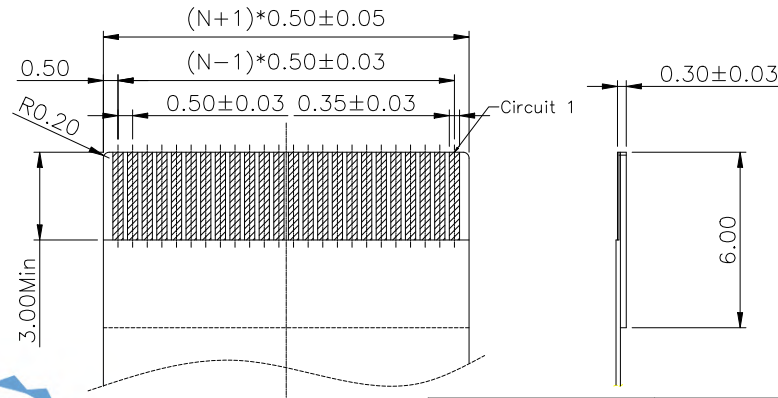

RECOMMENDED FPC/FFC DIMENSION



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0407-1

深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 X'': ±2'
.XXX: ±0.13 .XX': ±1'

NAME:

FPC 0.5-12P 正位立贴 H=4.0 无盖 贴膜编带

APPD JM_Zheng

CHKD LYX

DR SGF

PJ NO: 130-224-120001-W3G








SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE. $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.50 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 12.60METERS.
7. COMPONENT LOAD PER 13" REEL : 1000PCS.
8. PEELING OFF FORCE OF TOP TAPE $0.1\text{N} \sim 0.7\text{N}$ ($10.2\text{gf} \sim 71.4\text{gf}$).

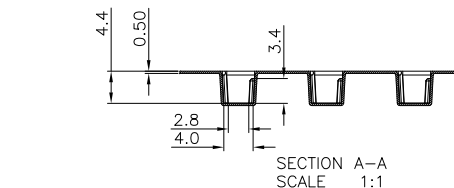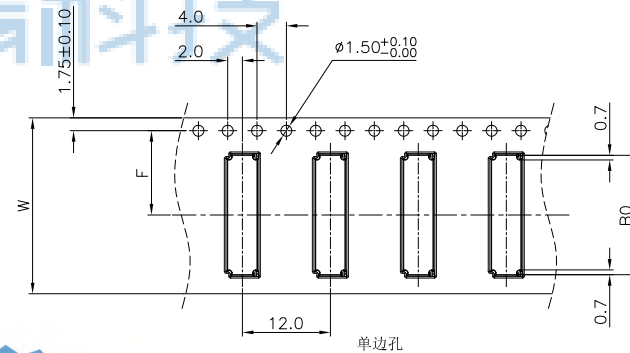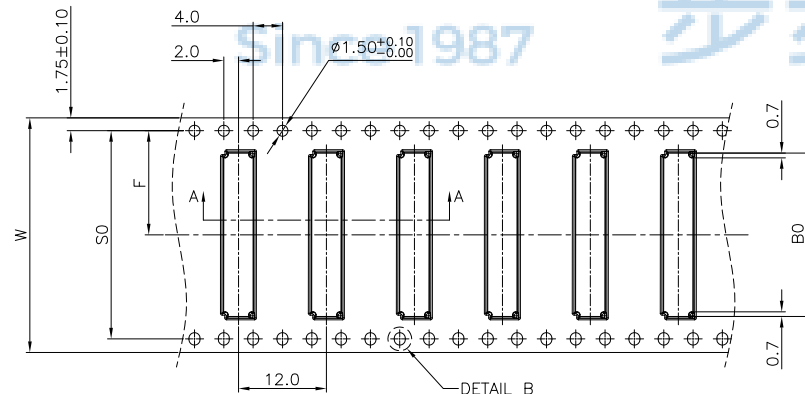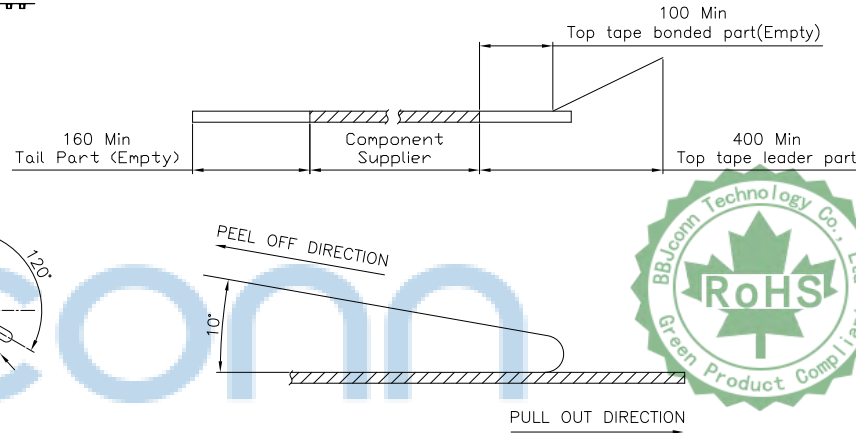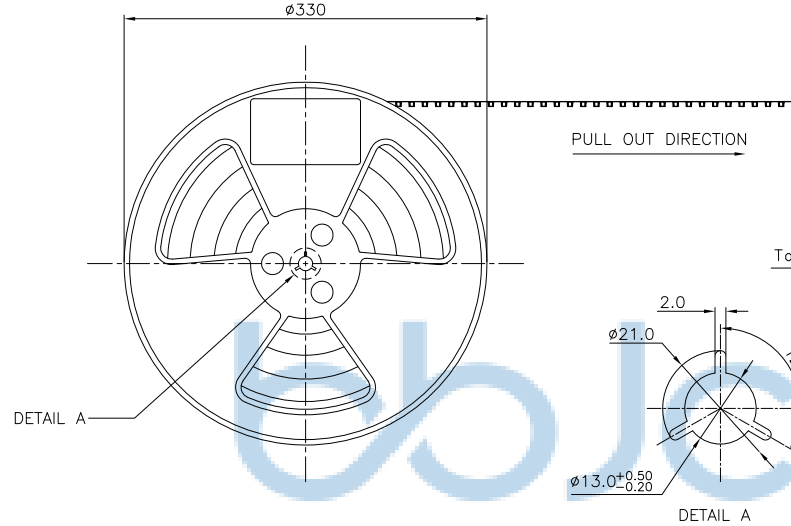

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0407-1

深圳市步步精科技有限公司
NAME:
FPC 0.5-12P 正位立贴 H=4.0 无盖 贴膜编带
PJ. NO.: 130-224-120001-W3G
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2

CKTS	B0±0.10	W	W1	F	S±0.10
6	6.30	16±0.3/-0	16.4	7.5±0.10	单边孔
7	6.80				
8	7.30				
9	7.80				
10	8.30				
11	8.80	24±0.3/-0	24.4	11.5±0.10	单边孔
12	9.30				
13	9.80				
14	10.30				
15	10.80				
16	11.30	32±0.30	32.4	14.2±0.10	单边孔
17	11.80				
18	12.30				
19	12.80				
20	13.30				
21	13.80	44±0.30	44.4	20.2±0.15	单边孔
22	14.30				
23	14.80				
24	15.30				
25	15.80				
26	16.30	44±0.30	44.4	20.2±0.15	单边孔
27	16.80				
28	17.30				
29	17.80				
30	18.30				
31	18.80	44±0.30	44.4	20.2±0.15	单边孔
32	19.30				
33	19.80				
34	20.30				
35	20.80				
36	21.30	44±0.30	44.4	20.2±0.15	单边孔
37	21.80				
38	22.30				
39	22.80				
40	23.30				
41	23.80	44±0.30	44.4	20.2±0.15	单边孔
42	24.30				
43	24.80				
44	25.30				
45	25.80				
46	26.30	44±0.30	44.4	20.2±0.15	单边孔
47	26.80				
48	27.30				
49	27.80				
50	28.30				