
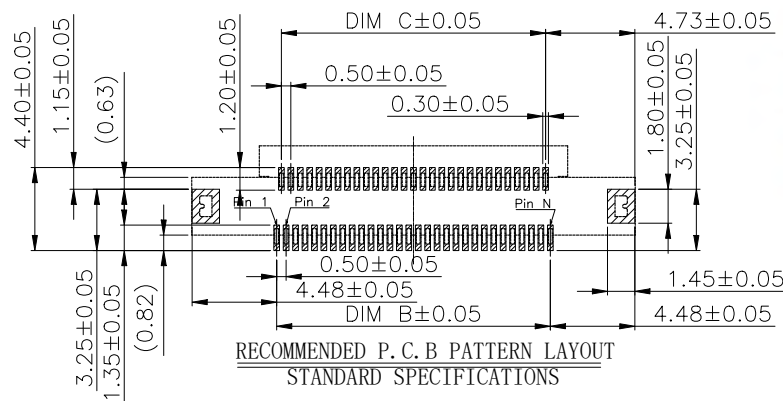
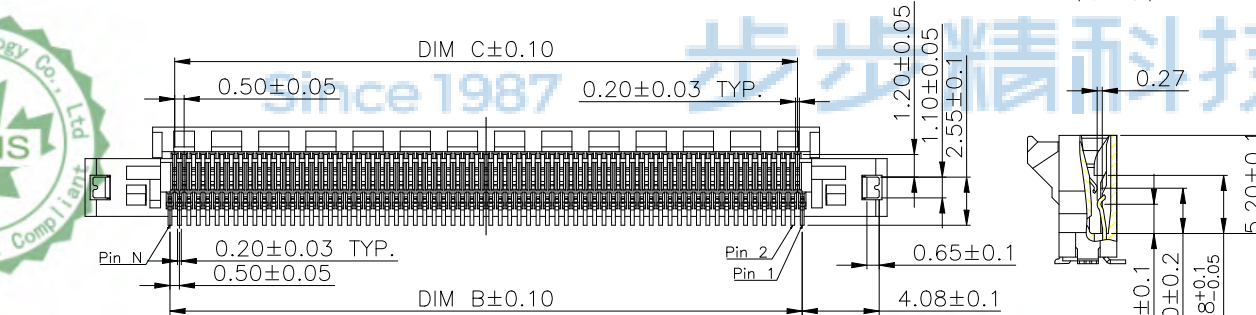
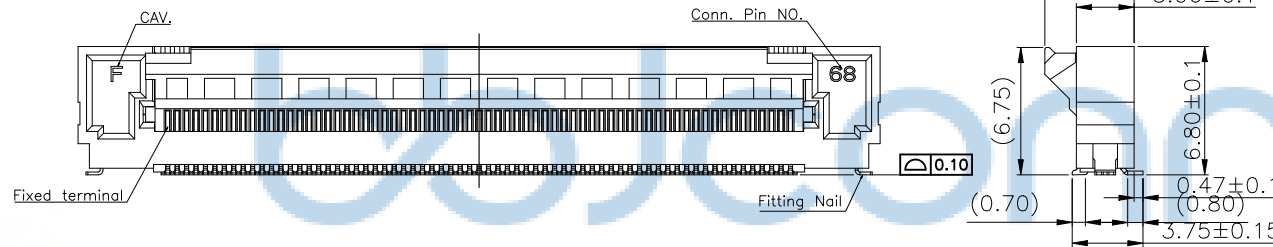


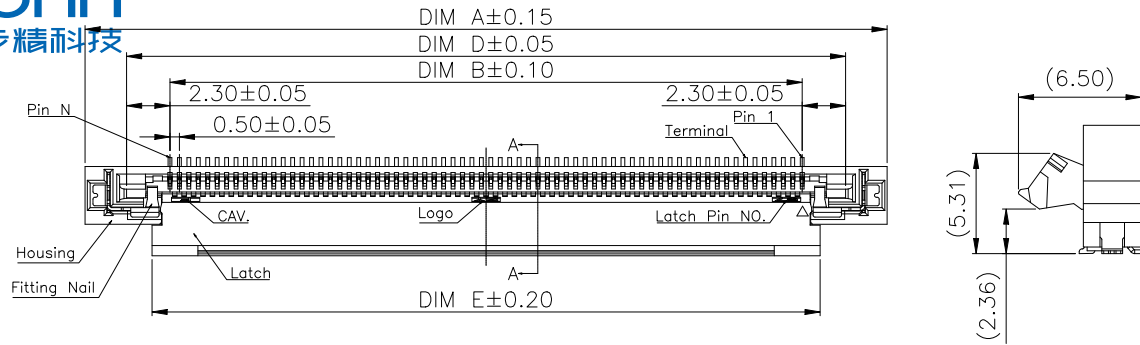

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

Notes:

1. Material:

1.1 Housing: thermoplastic high temp.
UL94V-0; Color: Natural.

1.2 Latch: thermoplastic high temp.
UL94V-0; Color: black.

1.3 Terminal: copper alloy.

1.4 Fixed terminal: copper alloy.

1.5 Fitting Nail: copper alloy.

2. Finish:

2.1 Terminal:

50u" Min. Nickel underplated overall.

1:Gold 1u" Min on Contact area and solder area.

2.2 Fixed Terminal:


50u" Min. Weldable nickel underplated overall.

2.3 Fitting Nail:

50u" Min. Nickel underplated overall.

80~150u" Min. Matte Tin plated.

3. Product must comply HF RoHS specification.

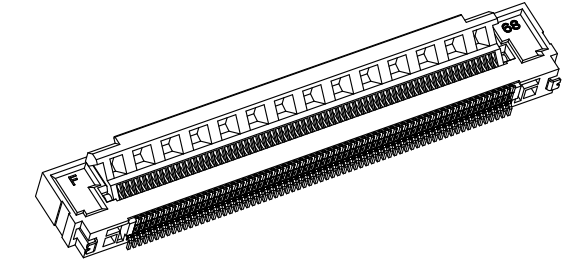

CKT.	DIM A	DIM B	DIM C	DIM D	DIM E
9.00	13.00	4.00	3.50	8.60	5.90
10.00	13.50	4.50	4.00	9.10	6.40
20.00	18.50	9.50	9.00	14.10	11.40
24.00	20.50	11.50	11.00	16.10	13.40
30.00	23.50	14.50	14.00	19.10	16.40
34.00	25.50	16.50	16.00	21.10	18.40
50.00	33.50	24.50	24.00	29.10	26.40
51.00	34.00	25.00	24.50	29.60	26.90
60.00	38.50	29.50	29.00	34.10	31.40
68.00	42.50	33.50	33.00	38.10	35.40

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0407-1

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR SGF







NAME: FPC 0.5-68P 翻盖正位立贴
带接地 H=6.8 编带 (AF552)

PJ NO: 130-224-680001-W3G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE: 1/3

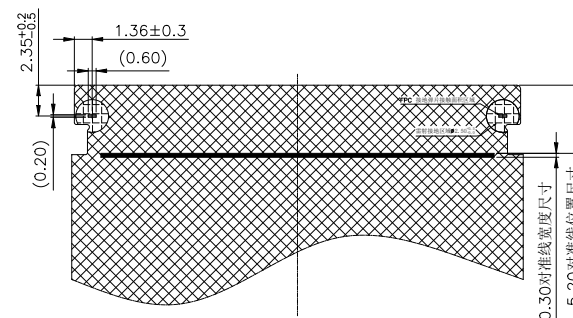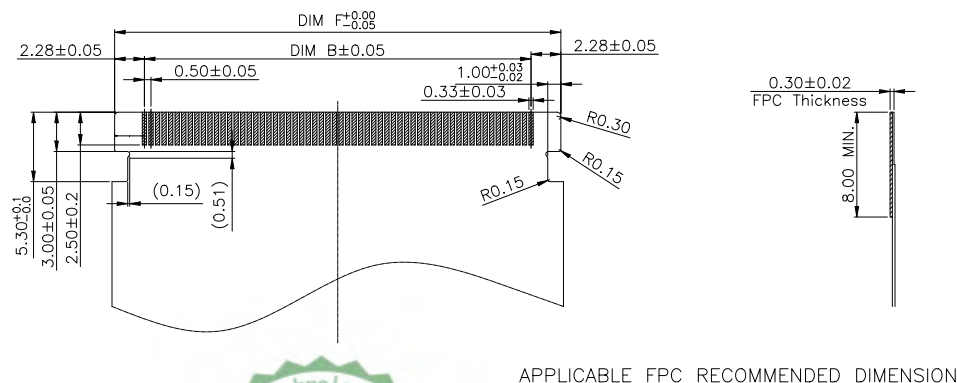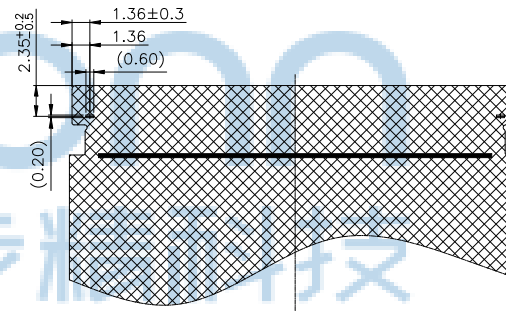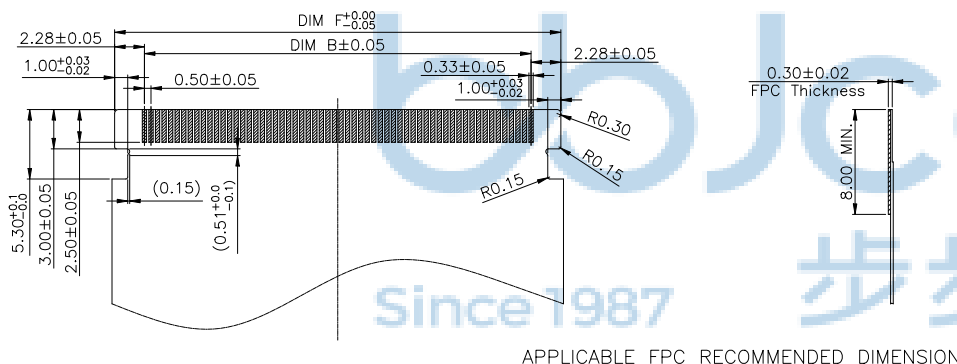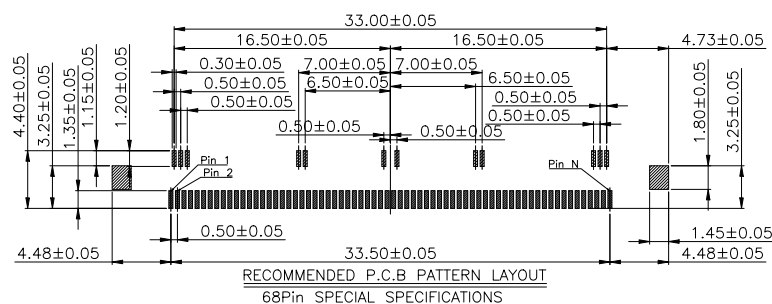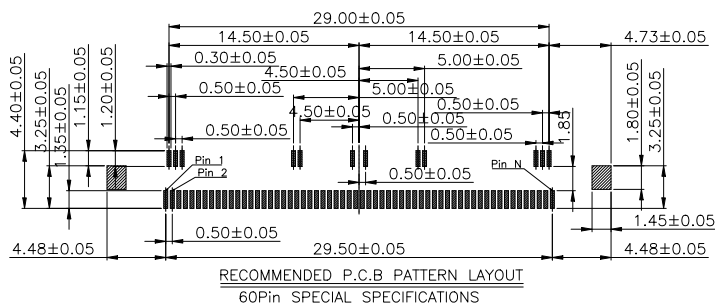





CKT.	DIM B	DIM F
9.00	4.00	8.55
10.00	4.50	9.05
20.00	9.50	14.05
24.00	11.50	16.05
30.00	14.50	19.05
34.00	16.50	21.05
50.00	24.50	29.05
51.00	25.00	29.55
60.00	29.50	34.05
68.00	33.50	38.05



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		NAME: FPC 0.5-68P 翻盖正位立贴 带接地 H=6.8 编带 (AF552)	
APPD	JM_Zheng		PJ NO: 130-224-680001-W3G
CHKD	LYX		SIZE:A4 DRW NO:
PDWG NO: 0407-1		FINISH:SEE NOTES MAT'L:SEE NOTES SCALE:N/A REV:A0 UNIT:mm PAGE: 2/3	
DR	SGF		

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE. $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: WHITE ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.40 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 12.384 METERS.
7. COMPONENT LOAD PER 13" REEL : 1000 PCS.
8. PEELING OFF FORCE OF TOP TAPE
 $0.1\text{N} \sim 0.7\text{N} (10.2\text{gf} \sim 71.4\text{gf})$.

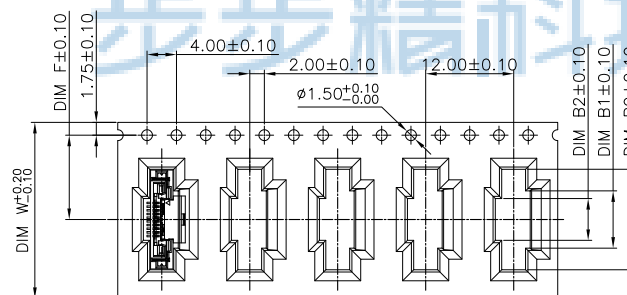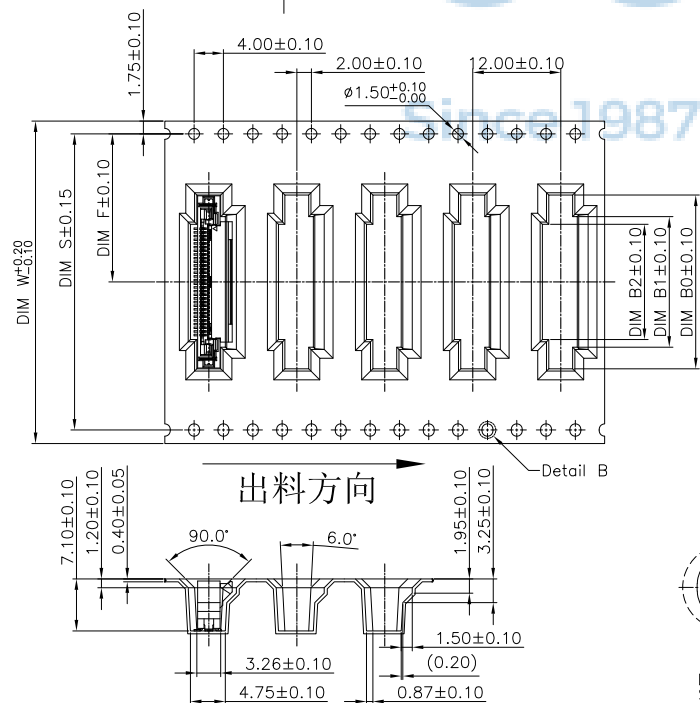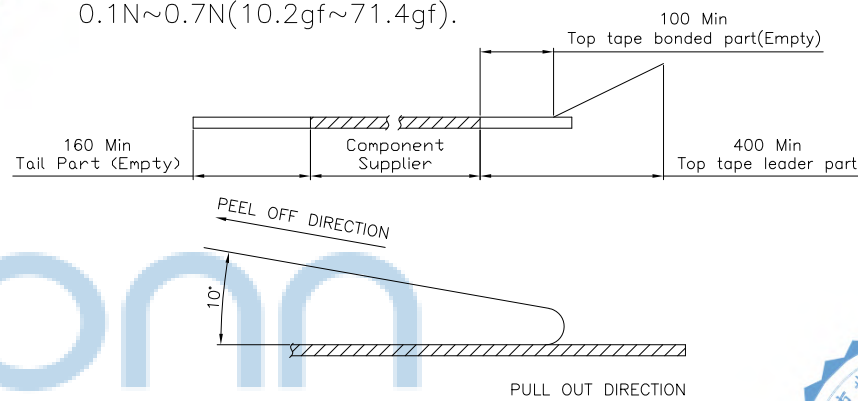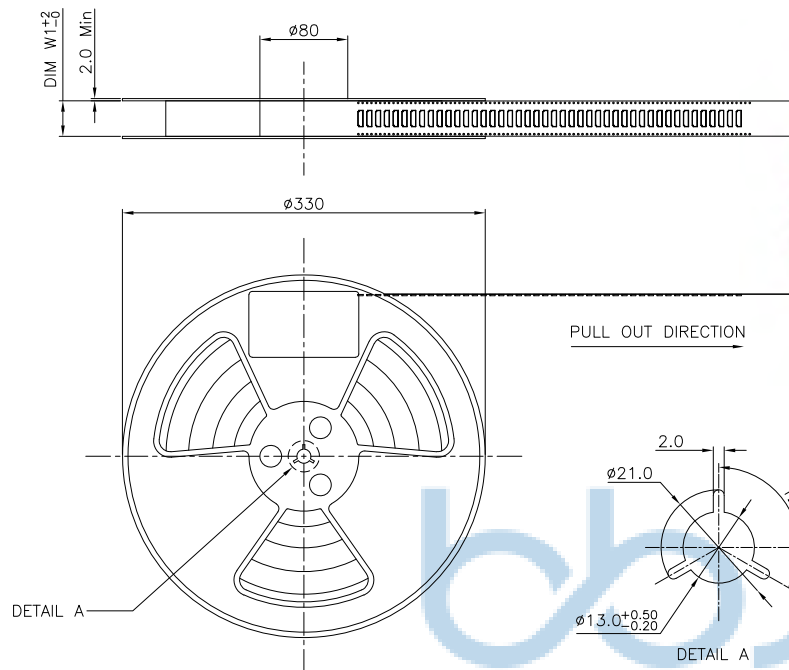

单边孔
出料方向

CKTS	DIM B0	DIM B1	DIM B2	DIM W	DIM W1	DIM F	DIM S0
09	13.20	7.30	5.20	24.00	24.40	11.50	单边孔
10	13.70	7.80	5.70				
20	18.70	12.80	10.70	32.00	32.40	14.20	28.40
24	20.70	14.80	12.70	44.00	44.40	20.20	40.40
30	23.70	17.80	15.70				
34	25.70	19.80	17.70				
60	38.70	32.80	30.70	56.00	56.40	26.20	52.40
68	42.70	36.80	34.70				

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

 深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^{\circ}$	NAME: FPC 0.5-68P 翻盖正位立贴 带接地 H=6.8 编带 (AF552)
.XX: ± 0.25	X*: $\pm 2^{\circ}$	
.XXX: ± 0.13	XX*: $\pm 1^{\circ}$	

APPD	JM_Zheng		PJ NO: 130-224-680001-W3G
------	----------	---	---------------------------

CHKD	LYX		SIZE:A4	DRW NO:
		FINISH SEE NOTES		MAT'G SEE NOTES

		FINISH:SEE NOTES	MATERIAL:SEE NOTES
DR	SGF	SCALE: N/A	REV: A0
		UNIT:mm	PAGE: 3/3

PDWG NO:0407-1

DR

SGF

NAME: FPC 0.5-68P 翻盖正位立贴
带接地 H=6.8 编带 (AF552

	PJ NO: 130-224-680001-W3G
---	---------------------------

	SIZE:A4	DRW NO:
---	---------	---------

FINISH:SEE NOTES	MAT'L:SEE NOTES
------------------	-----------------

SCALE:N/A	REV: A0	UNIT:mm	PAGE: 3/3
-----------	---------	---------	-----------