

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	GZY

Note:

1. Material:

1.1 Housing: thermoplastic high temp.UL94V-0; Color: natural.

1.2 Latch: thermoplastic high temp.UL94V-0; Color: black.

1.3 Terminal: copper alloy.

1.4 Fitting Nail: copper alloy.

2. Finish:

2.1 Terminal:







Underplating: Au/matt Tin overall.

2.2 Fitting Nail:

Underplating: matt Tin overall.

3. Product must comply HF RoHS specification.

CKTS	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
4	3.00	5.10	9.00	10.10	5.20	6.45
5	4.00	6.10	10.00	11.10		
6	5.00	7.10	11.00	12.10		
7	6.00	8.10	12.00	13.10		
8	7.00	9.10	13.00	14.10		
9	8.00	10.10	14.00	15.10	5.75	7.00
10	9.00	11.10	15.00	16.10		
11	10.00	12.10	16.00	17.10		
12	11.00	13.10	17.00	18.10		
13	12.00	14.10	18.00	19.10		
14	13.00	15.10	19.00	20.10		
15	14.00	16.10	20.00	21.10		
16	15.00	17.10	21.00	22.10		
17	16.00	18.10	22.00	23.10		
18	17.00	19.10	23.00	24.10		
19	18.00	20.10	24.00	25.10		
20	19.00	21.10	25.00	26.10		
21	20.00	22.10	26.00	27.10		
22	21.00	23.10	27.00	28.10		
23	22.00	24.10	28.00	29.10		
24	23.00	25.10	29.00	30.10		
25	24.00	26.10	30.00	31.10		
26	25.00	27.10	31.00	32.10		
27	26.00	28.10	32.00	33.10		
28	27.00	29.10	33.00	34.10		
29	28.00	30.10	34.00	35.10		

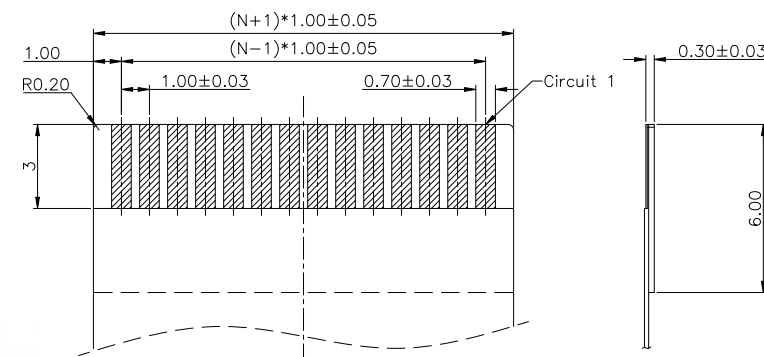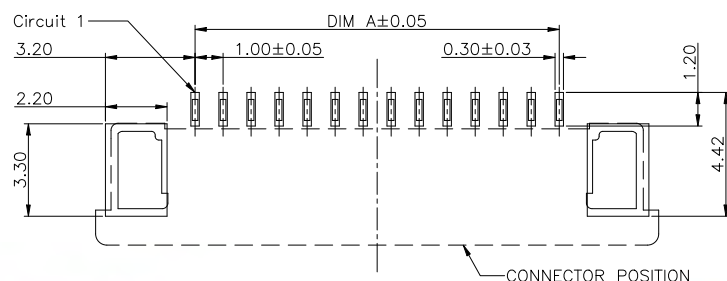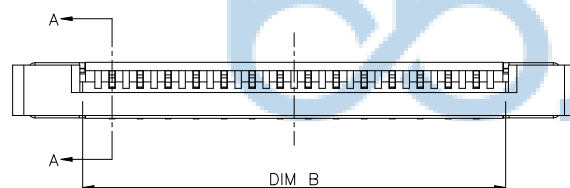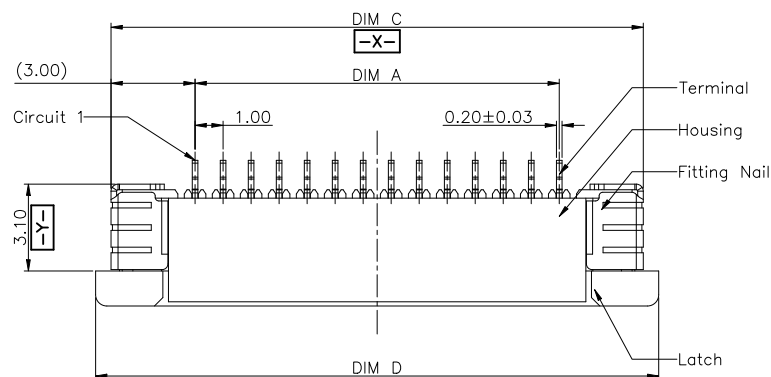

RECOMMENDED P.C.B PATTERN LAYOUT

RECOMMENDED FPC/FFC DIMENSION



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO:0407-1




深圳市步步精科技有限公司
NAME:
FPC 1.0-6P 抽拉上接 H=2.0 编带
PJ NO: 130-241-060003-W3G
SIZE:A4 DRW NO:
FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV:A0 UNIT:mm PAGE:1/2



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	GZY

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE. $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.35 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 24.60METERS.
7. COMPONENT LOAD PER 13" REEL : 2000PCS.
8. PEELING OFF FORCE OF TOP TAPE $0.1\text{N} \sim 0.7\text{N} (10.2\text{gf} \sim 71.4\text{gf})$.

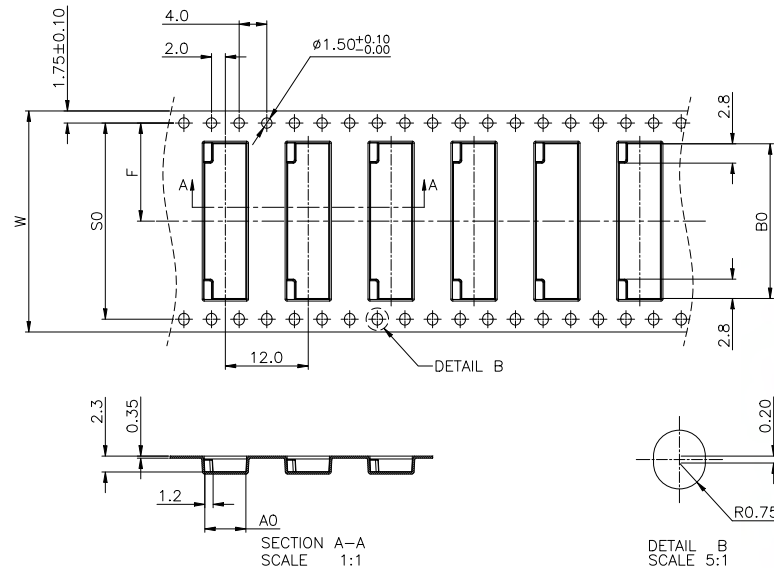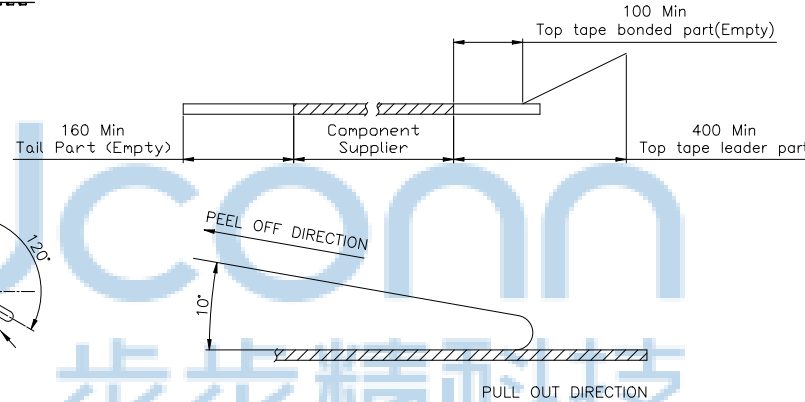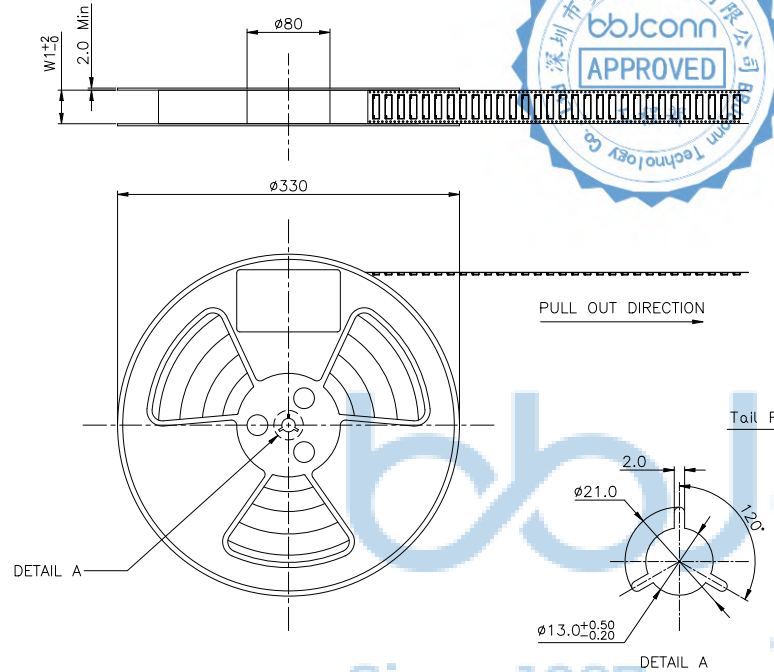

CKTS For 1.0Pitch Conn.	CKTS For 0.5Pitch Conn.	B0 ± 0.10	A0 ± 0.10	W	W1	F	S0 ± 0.10
	4	7.90					
	5	8.40					
	6	8.90					
	7	9.40					
	8	9.90					
4	9	10.40					
	10	10.90					
5	11	11.40					
	12	11.90					
6	13	12.40					
	14	12.90					
7	15	13.40					
	16	13.90					
8	17	14.40					
	18	14.90					
9	19	15.40					
	20	15.90					
10	21	16.40					
	22	16.90					
11	23	17.40					
	24	17.90					
12	25	18.40					
	26	18.90					
13	27	19.40					
	28	19.90					
14	29	20.40					
	30	20.90					
15	31	21.40					
	32	21.90					
16	33	22.40					
	34	22.90					
17	35	23.40					
	36	23.90					
18	37	24.40					
	38	24.90					
19	39	25.40					
	40	25.90					
20	41	26.40					
	42	26.90					
21	43	27.40					
	44	27.90					
22	45	28.40					
	46	28.90					
23	47	29.40					
	48	29.90					
24	49	30.40					
	50	30.90					
25	51	31.40					
	52	31.90					
26	53	32.40					
	54	32.90					
27	55	33.40					
	56	33.90					
28	57	34.40					
	58	34.90					
29	59	35.40					
	60	35.90					

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO:0407-1

深圳市步步精科技有限公司

NAME: FPC 1.0-6P 抽拉上接 H=2.0 编带

PJ NO: 130-241-060003-W3G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2