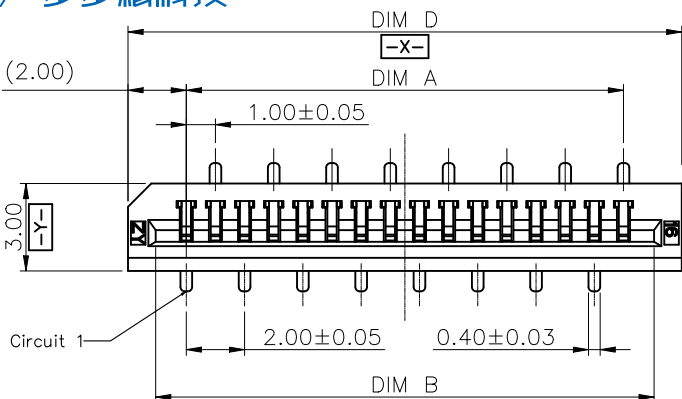


Note:

1. Material:

1.1 Housing: thermoplastic high temp.UL94V-0; Color: natural/black.

1.2 Terminal: copper alloy.

2. Finish:




2.1 Terminal:

Underplating: Au/matt Tin overall.


2.2 Fitting Nail:

Underplating: matt Tin overall.

3. Product must comply HF RoHS specification.

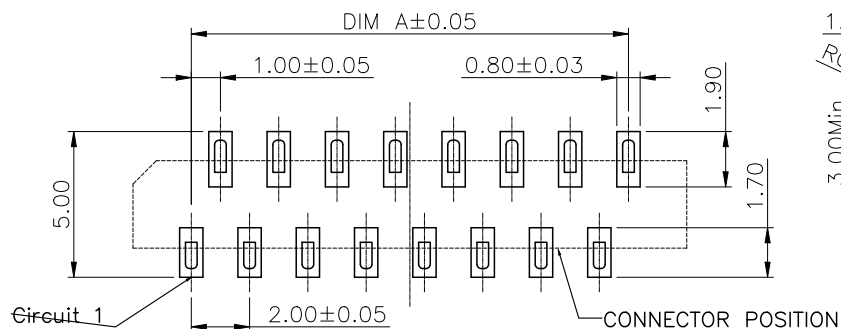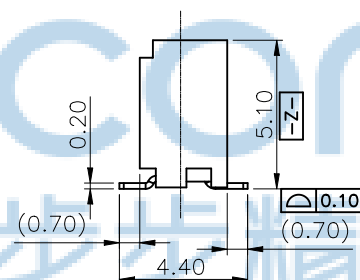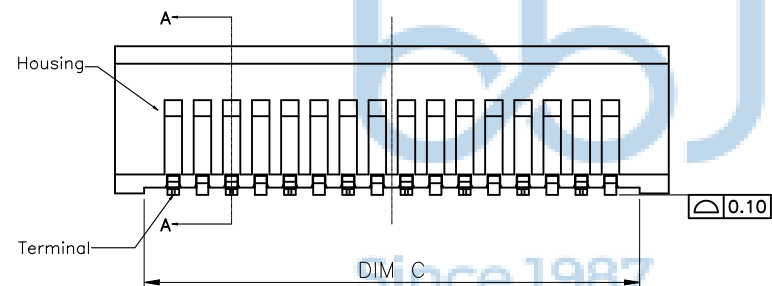

RECOMMENDED P.C.B PATTERN LAYOUT

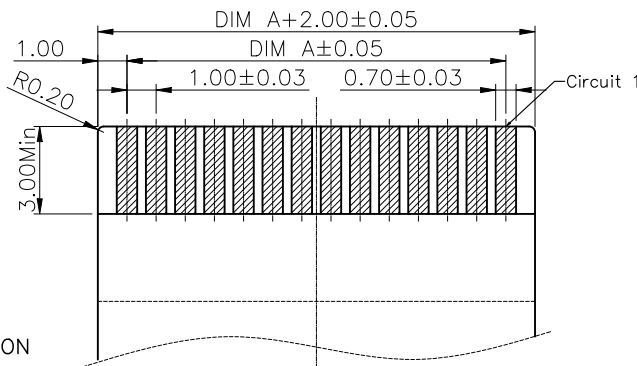

RECOMMENDED FPC/FFC DIMENSION

CKTS	DIM A	DIM B	DIM C	DIM D
4	3.00	5.10	5.00	7.00
5	4.00	6.10	6.00	8.00
6	5.00	7.10	7.00	9.00
7	6.00	8.10	8.00	10.00
8	7.00	9.10	9.00	11.00
9	8.00	10.10	10.00	12.00
10	9.00	11.10	11.00	13.00
11	10.00	12.10	12.00	14.00
12	11.00	13.10	13.00	15.00
13	12.00	14.10	14.00	16.00
14	13.00	15.10	15.00	17.00
15	14.00	16.10	16.00	18.00
16	15.00	17.10	17.00	19.00
17	16.00	18.10	18.00	20.00
18	17.00	19.10	19.00	21.00
19	18.00	20.10	20.00	22.00
20	19.00	21.10	21.00	23.00
21	20.00	22.10	22.00	24.00
22	21.00	23.10	23.00	25.00
23	22.00	24.10	24.00	26.00
24	23.00	25.10	25.00	27.00
25	24.00	26.10	26.00	28.00
26	25.00	27.10	27.00	29.00
27	26.00	28.10	28.00	30.00
28	27.00	29.10	29.00	31.00
29	28.00	30.10	30.00	32.00
30	29.00	31.10	31.00	33.00



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0407-1



深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 X'': ±2'
.XXX: ±0.13 .XX': ±1'

APPD JM_Zheng

CHKD LYX

DR SGF

NAME: FPC 1.0-20P 正位立贴 H=5.1
加盖编带(AFA11)



PJ NO: 130-244-160003-W3G

SIZE:A4 DRW NO:





FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE: $\pm 0.20\text{mm}$
 2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
 3. ALL DIMENSIONS MEET EIA-481-D REQUIREMENTS.
 4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
 5. THICKNESS: $0.50 \pm 0.05 \text{ mm}$.
 6. PACKING LENGTH PER 13" REEL : 16.20METRES.
 7. COMPONENT LOAD PER 13" REEL : 1300PCS.
 8. PEELING OFF FORCE OF TOP TAPE $0.1\text{N} \sim 0.7\text{N} (10.2\text{gf} \sim 71.4\text{gf})$.

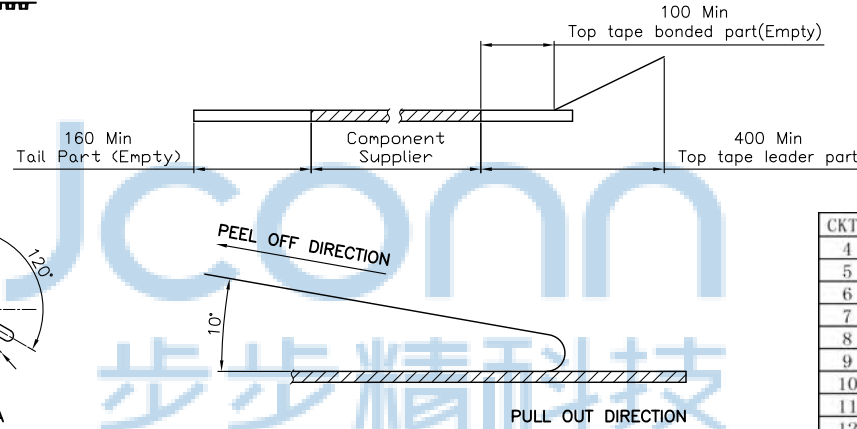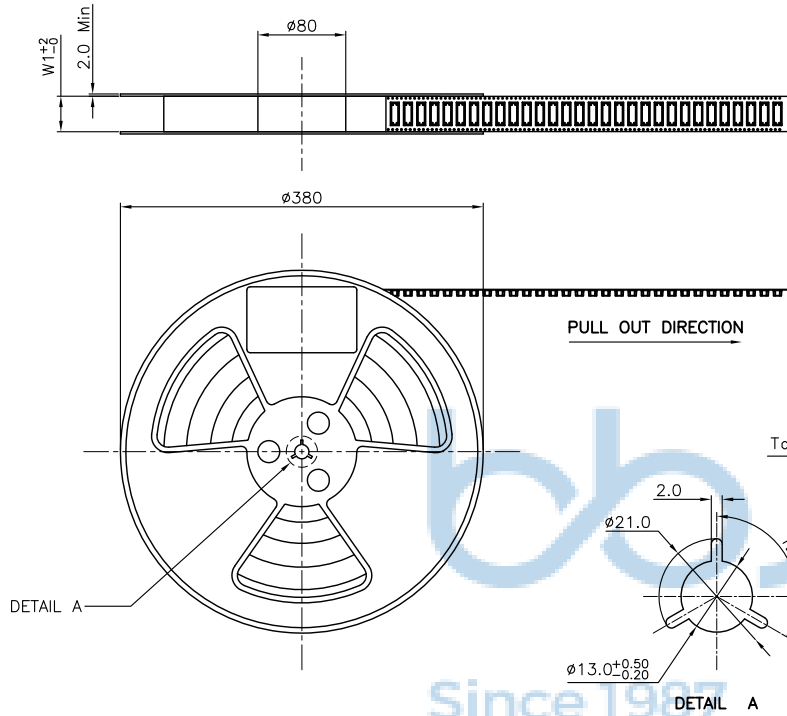

CKTS	B0 ± 0.10	W	W1	F	S0 ± 0.10
4	7.30	24 $\pm 0.3/-0$	24.4	11.5 ± 0.10	单边孔
5	8.30				
6	9.30				
7	10.30				
8	11.30				
9	12.30	32 ± 0.30	32.4	14.2 ± 0.10	28.4
10	13.30				
11	14.30				
12	15.30				
13	16.30				
14	17.30	44 ± 0.30	44.4	20.2 ± 0.15	40.4
15	18.30				
16	19.30				
17	20.30				
18	21.30				
19	22.30	44 ± 0.30	44.4	20.2 ± 0.15	40.4
20	23.30				
21	24.30				
22	25.30				
23	26.30				
24	27.30	44 ± 0.30	44.4	20.2 ± 0.15	40.4
25	28.30				
26	29.30				
27	30.30				
28	31.30				
29	32.30	44 ± 0.30	44.4	20.2 ± 0.15	40.4
30	33.30				

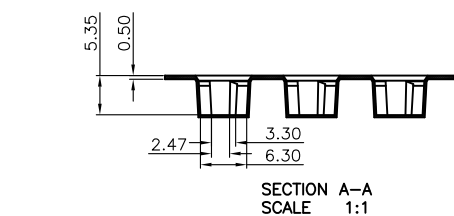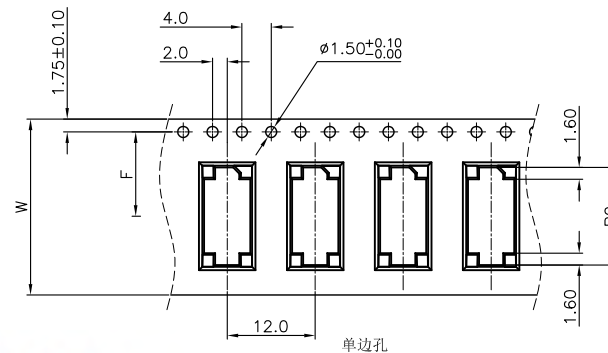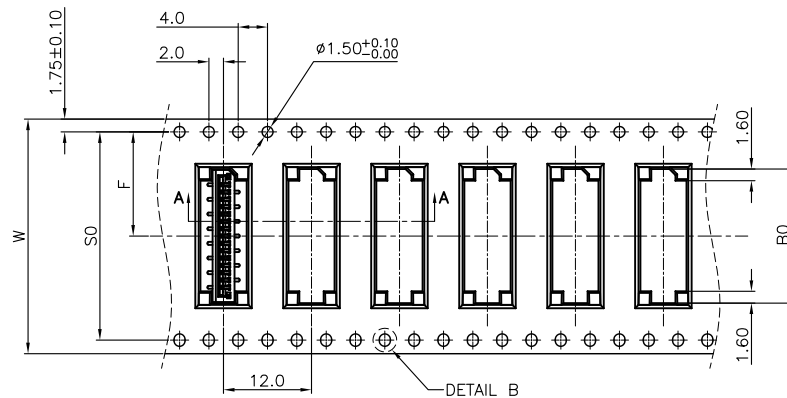

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
APPD	JM_Zheng	NAME: FPC 1.0-20P 正位立贴 H=5.1 加盖编带(AFA11)	
CHKD	LYX	PJ NO: 130-244-160003-W3G	
PDWG NO:0407-1	DR	SCALE:N/A	REV: A0
	SGF	MAT'L:SEE NOTES	UNIT:mm
		PAGE: 2/2	