
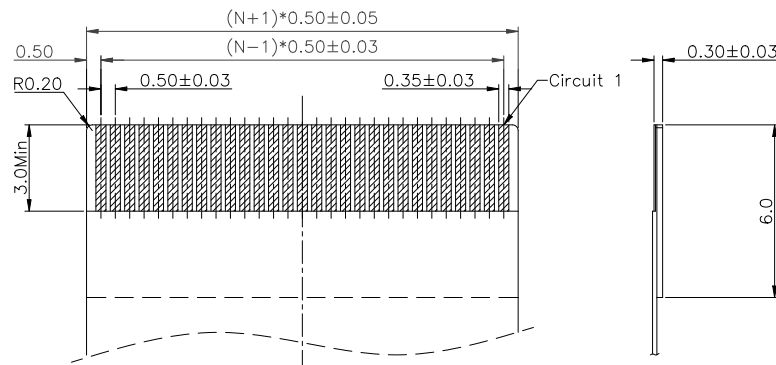


2. Finish:

3. Product must comply HF RoHS specification.

41	20.00	21.10	24.90
42	20.50	21.60	25.40



RECOMMENDED FPC/FFC DIMENSION








 深圳市步步精科技有限公司		NAME: FPC 0.5-40P 翻盖下接 H=2.0 编带	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X*: $\pm 3^*$.X*: $\pm 2^*$.XX*: $\pm 1^*$	PJ. NO.: PC.02.04-32-C013 SIZE: A4 DRW NO.:	
APPD. JM_Zheng		FINISH: SEE NOTES MAT'L: SEE NOTES	
CHKD. LYX		SCALE: N/A REV: A0 UNIT: mm PAGE: 1/2	
DR. SGF			

CHKD.	LYX	SIZE: A4	DRW NO.:
		FINISH: SEE NOTES	MAT'L.: SEE NOTES

DR.	SGF	SCALE: N/A	REV: A0	UNIT: mm	PAGE: 1 / 2
-----	-----	------------	---------	----------	-------------

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE. $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: XXXXX ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.35 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 24.60METERS.
7. COMPONENT LOAD PER 13" REEL : 2000PCS.
8. PEELING OFF FORCE OF TOP TAPE 0.1N~0.7N(10.2gf~71.4gf).

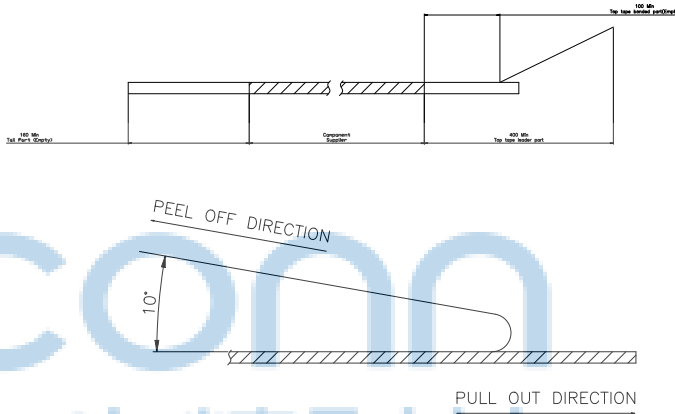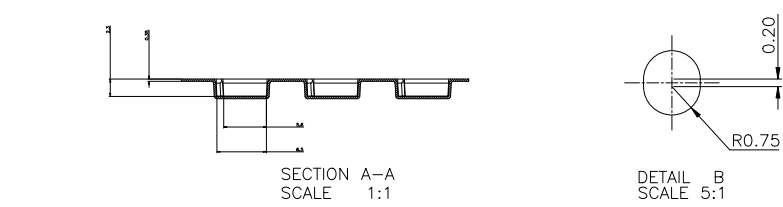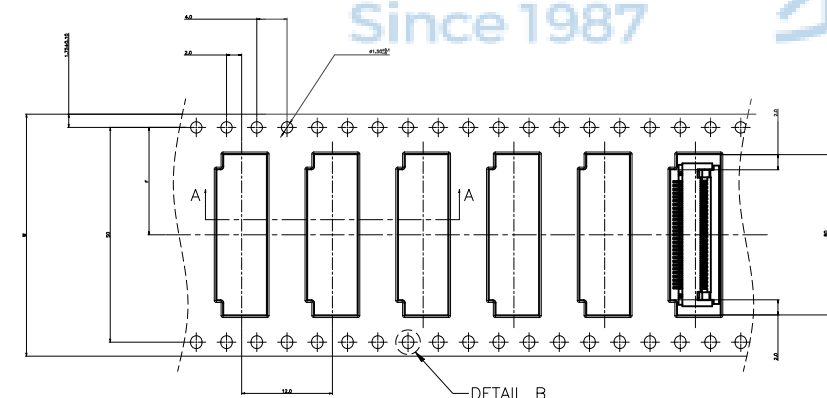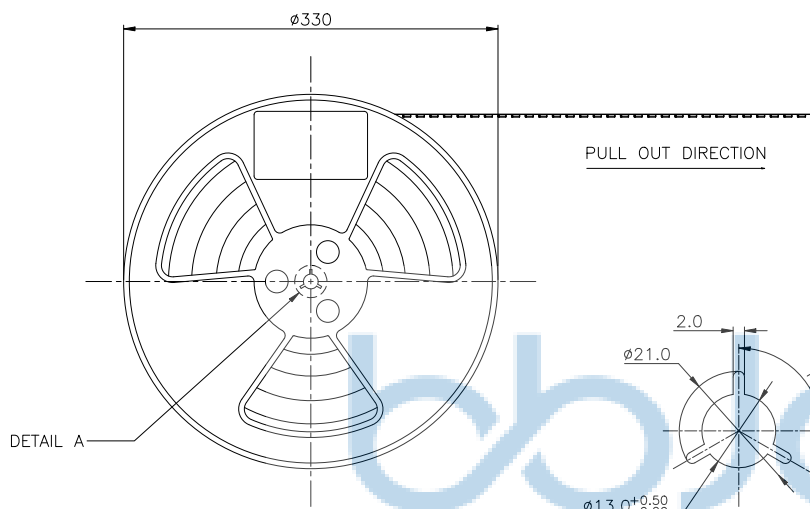

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: FPC 0.5-40P 翻盖下接 H=2.0 编带	
PDWG.NO: 0407-1		.X: ± 0.38 .X': $\pm 3'$.XX: ± 0.25 .X': $\pm 2'$.XXX: ± 0.13 .XX': $\pm 1'$		APPD. JM_Zheng CHKD. LYX DR. SGF	
				PJ. NO.: PC.02.04-32-C013 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	

CKTS For 0.5Pitch Conn.	CKTS For 1.0Pitch Conn.	Ø0±0.10	W	W1	F	S0±0.10
4		6.70				
5	2	7.20				
6		7.70				
7	3	8.20				
8		8.70				
9	4	9.20				
10		9.70				
11	5	10.20				
12		10.70				
13	6	11.20				
14		11.70				
15	7	12.20				
16		12.70				
17	8	13.20				
18		13.70				
19	9	14.20				
20		14.70				
21	10	15.20				
22		15.70				
23	11	16.20				
24		16.70				
25	12	17.20				
26		17.70				
27	13	18.20				
28		18.70				
29	14	19.20				
30		19.70				
31	15	20.20				
32		20.70				
33	16	21.20				
34		21.70				
35	17	22.20				
36		22.70				
37	18	23.20				
38		23.70				
39	19	24.20				
40		24.70				
41	20	25.20				
42		25.70				
43	21	26.20				
44		26.70				
45	22	27.20				
46		27.70				
47	23	28.20				
48		28.70				
49	24	29.20				
50		29.70				
51	25	30.20				
52		30.70				
53	26	31.20				
54		31.70				
55	27	32.20				
56		32.70				
57	28	33.20				
58		33.70				
59	29	34.20				
60		34.70				