
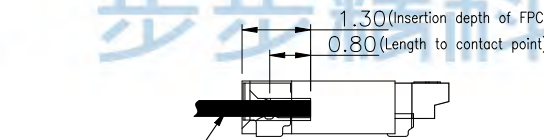

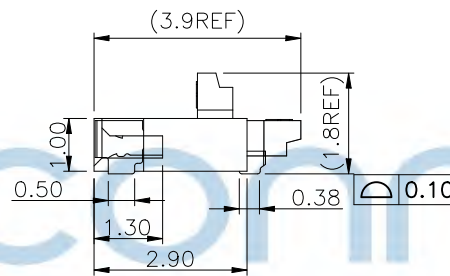






REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

Note:

- Material:
 - Housing: thermoplastic high temp.UL94V-0;
 - Latch: thermoplastic high temp.UL94V-0;
 - Terminal: copper alloy.
 - Fitting Nail: copper alloy.
- Finish:
 - Terminal:
 - 50~100u" Nickel under plating over all
 - Gold Flash on contact and Solder
 - 3u" Gold on contact and Gold Flash on Solder
 - 5u" Gold on contact and Gold Flash on Solder
 - Fitting Nail:
 - 50~100u" Nickel under plating over all
 - 80~150u" Matte tin over all
- Product must comply HF RoHS specification.

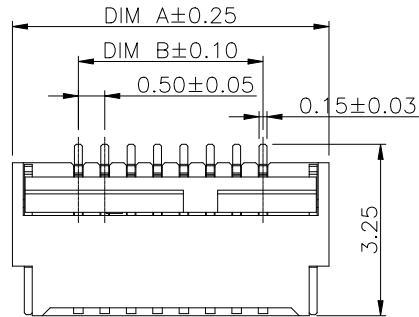





CKTS	DIM A	DIM B	DIM C	DIM D
4	4.00	1.50	2.57	3.40
5	4.50	2.00	3.07	3.90
6	5.00	2.50	3.57	4.40
7	5.50	3.00	4.07	4.90
8	6.00	3.50	4.57	5.40
9	6.50	4.00	5.07	5.90
10	7.00	4.50	5.57	6.40
12	8.00	5.50	6.57	7.40
14	9.00	6.50	7.57	8.40
16	10.00	7.50	8.57	9.40
18	11.00	8.50	9.57	10.40
20	12.00	9.50	10.57	11.40
22	13.00	10.50	11.57	12.40
24	14.00	11.50	12.57	13.40
26	15.00	12.50	13.57	14.40
28	16.00	13.50	14.57	15.40
30	17.00	14.50	15.57	16.40
32	18.00	15.50	16.57	17.40
34	19.00	16.50	17.57	18.40
36	20.00	17.50	18.57	19.40
38	21.00	18.50	19.57	20.40
40	22.00	19.50	20.57	21.40
42	23.00	20.50	21.57	22.40
45	24.50	22.00	23.07	23.90
50	27.00	24.50	25.57	26.40

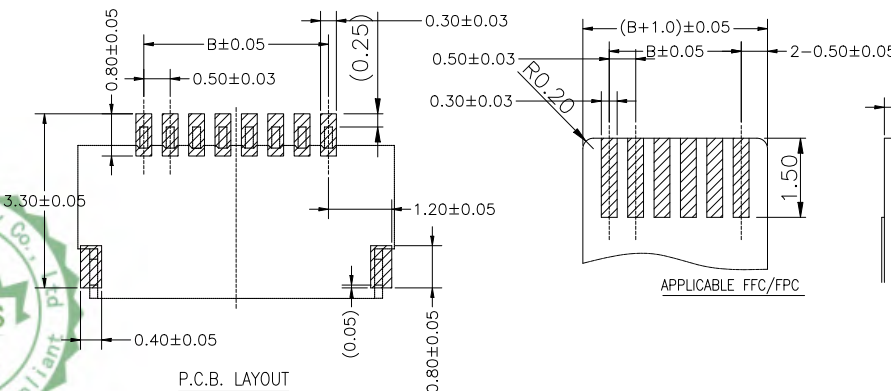


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程 部	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" XX': ±1"	
APPD	JM_Zheng	NAME: FPC 0.5-8P 后翻式 H=1.0	
CHKD	Tang	PJ NO: PC.02.05-12-0002	
PDWG NO: 0407-1		SIZE: A4	
DR		DRW NO:	
		FINISH: SEE NOTES	
		MAT'L: SEE NOTES	
		SCALE: N/A	
		REV: A0	
		UNIT: mm	
		PAGE: 1/2	

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE: $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.30 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 32.40METERS.
7. COMPONENT LOAD PER 13" REEL : 4000PCS.
8. PEELING OFF FORCE OF TOP TAPE $0.1\text{N} \sim 0.7\text{N}$ ($10.2\text{gf} \sim 71.4\text{gf}$).

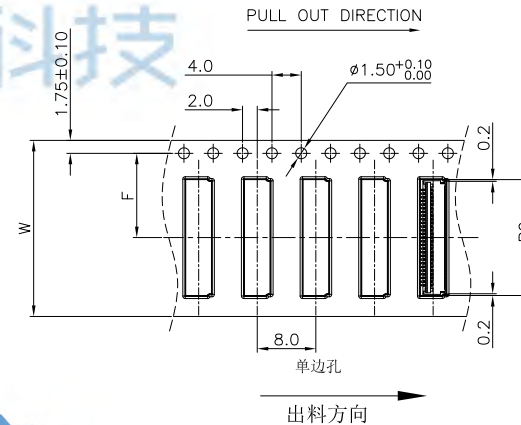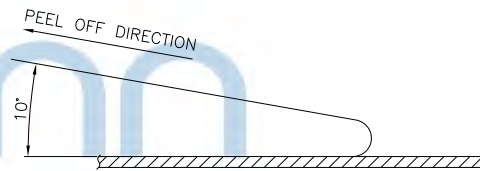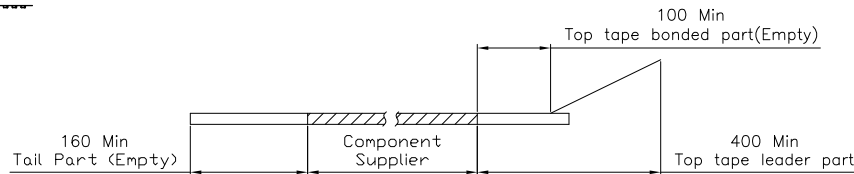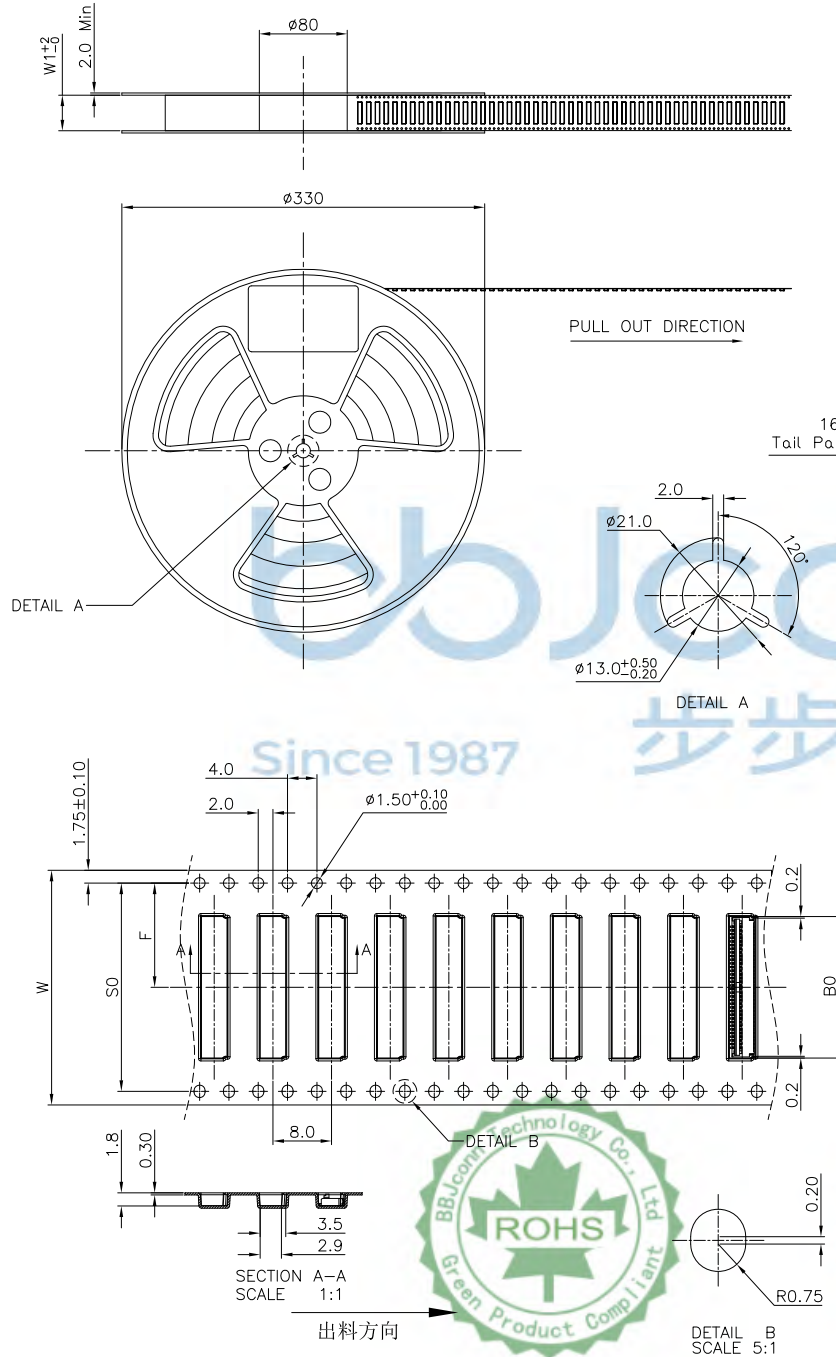

CKTS FOR 1.0 PITCH	CKTS FOR 0.5 PITCH	B0 ± 0.10	W	W1	F ± 0.10	S0 ± 0.10
	4	4.30				
	5	4.80				
	6	5.30				
	7	5.80				
	8	6.30				
4	9	6.80				
	10	7.30				
5	11	7.80				
	12	8.30				
6	13	8.80				
	14	9.30				
7	15	9.80				
	16	10.30				
8	17	10.80				
	18	11.30				
9	19	11.80				
	20	12.30				
10	21	12.80				
	22	13.30				
11	23	13.80				
	24	14.30				
12	25	14.80				
	26	15.30				
13	27	15.80				
	28	16.30				
14	29	16.80				
	30	17.30				
15	31	17.80				
	32	18.30				
16	33	18.80				
	34	19.30				
17	35	19.80				
	36	20.30				
18	37	20.80				
	38	21.30				
19	39	21.80				
	40	22.30				
20	41	22.80				
	42	23.30				
21	43	23.80				
	44	24.30				
22	45	24.80				
	46	25.30				
23	47	25.80				
	48	26.30				
24	49	26.80				
	50	27.30				



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司	
NAME:	FPC 0.5-8P 后翻式 H=1.0
APPD	JM_Zheng
CHKD	Tang
PDWG NO: 0407-1	DR LYX
FINISH: SEE NOTES	MAT'L: SEE NOTES
SCALE: N/A	REV: A0
UNIT: mm	PAGE: 1/2