


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY




Note:

- Material:
 - Housing: thermoplastic high temp.UL94V-0;
 - Latch: thermoplastic high temp.UL94V-0;
 - Terminal: copper alloy.
 - Fitting Nail: copper alloy.
- Finish:
 - Terminal:
 - 50~100u" Nickel under plating over all
 - Gold flash on contact and solder area.
 - K:3u" Gold on contact and Gold Flash on Solder
 - M:5u" Gold on contact and Gold Flash on Solder
 - Fitting Nail:
 - 50~100u" Nickel under plating over all
 - 80~150u" Matte tin over all
- Product must comply HF RoHS specification.

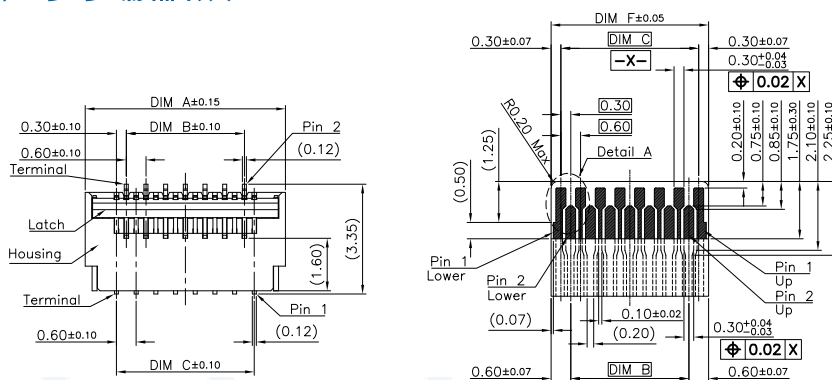


RECOMMENDED FPC

Detail A Scale 4:1

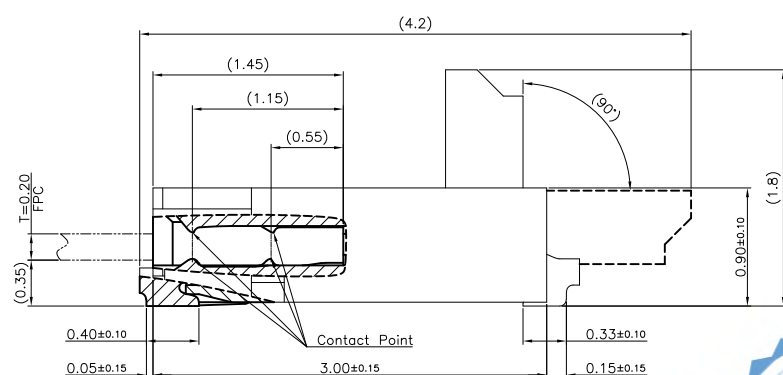

Detail B Scale 4:1

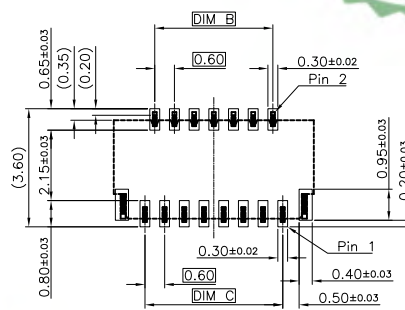

RECOMMENDED PCB MOUNTING PATTERN

CKTS	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
9	4.30	1.80	2.40	3.03	3.73	3.00
11	4.90	2.40	3.00	3.63	4.33	3.60
13	5.50	3.00	3.60	4.23	4.93	4.20
15	6.10	3.60	4.20	4.83	5.53	4.80
17	6.70	4.20	4.80	5.43	6.13	5.40
19	7.30	4.80	5.40	6.03	6.73	6.00
21	7.90	5.40	6.00	6.63	7.33	6.60
23	8.50	6.00	6.60	7.23	7.93	7.20
25	9.10	6.60	7.20	7.83	8.53	7.80
27	9.70	7.20	7.80	8.43	9.13	8.40
29	10.30	7.80	8.40	9.03	9.73	9.00
31	10.90	8.40	9.00	9.63	10.33	9.60
33	11.50	9.00	9.60	10.23	10.93	10.20
35	12.10	9.60	10.20	10.83	11.53	10.80
37	12.70	10.20	10.80	11.43	12.13	11.40
39	13.30	10.80	11.40	12.03	12.73	12.00
41	13.90	11.40	12.00	12.63	13.33	12.60
43	14.50	12.00	12.60	13.23	13.93	13.20
45	15.10	12.60	13.20	13.83	14.53	13.80
47	15.70	13.20	13.80	14.43	15.13	14.40
49	16.30	13.80	14.40	15.03	15.73	15.00
51	16.90	14.40	15.00	15.63	16.33	15.60
53	17.50	15.00	15.60	16.23	16.93	16.20
55	18.10	15.60	16.20	16.83	17.53	16.80
57	18.70	16.20	16.80	17.43	18.13	17.40
59	19.30	16.80	17.40	18.03	18.73	18.00
61	19.90	17.40	18.00	18.63	19.33	18.60
63	20.50	18.00	18.60	19.23	19.93	19.20
65	21.10	18.60	19.20	19.83	20.53	19.80
67	21.70	19.20	19.80	20.43	21.13	20.40
69	22.30	19.80	20.40	21.03	21.73	21.00
71	22.90	20.40	21.00	21.63	22.33	21.60



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0407-1



深圳市步步精科技有限公司

.X: ± 0.38
.XX: ± 0.25
.XXX: ± 0.13

X': $\pm 3'$
X'': $\pm 2'$
X''': $\pm 1'$

NAME:
FPC 0.3-11P 后翻式 H=0.9 编带

APPD. JM_Zheng

CHKD. LYX

DR. GZY

PJ. NO.: 130-211-110001-W3G

SIZE: A4 DRW NO.:



FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE. $\pm 0.20\text{mm}$
 2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
 3. ALL DIMENSIONS MEET EIA-481-D REQUIREMENTS.
 4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
 5. THICKNESS: $0.30 \pm 0.05 \text{ mm}$.
 6. PACKING LENGTH PER 13" REEL: 28.60METERS.
 7. COMPONENT LOAD PER 13" REEL: 3500PCS
 8. PEELING OFF FORCE OF TOP TAPE 0.1N~0.7N(10.2gf~71.4gf).

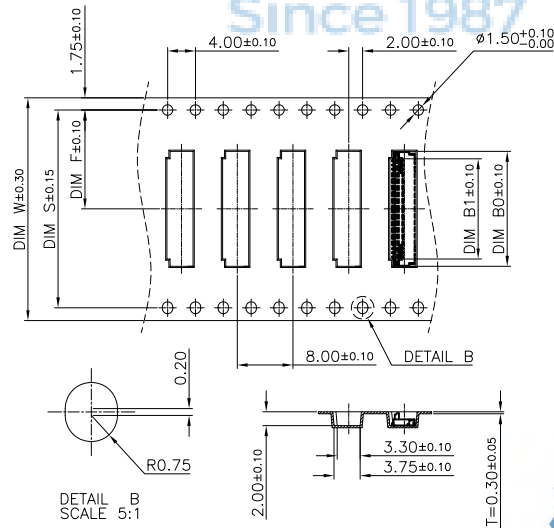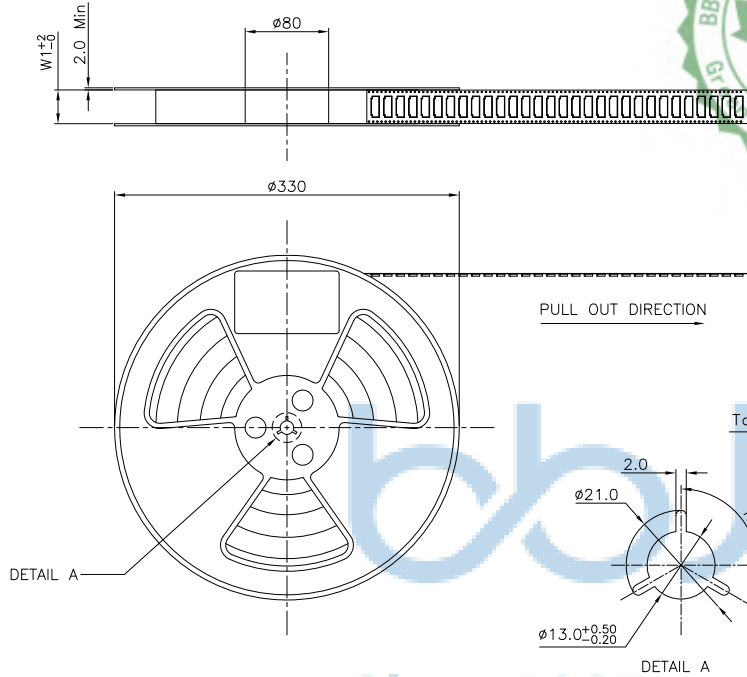

49~61PIN REEL

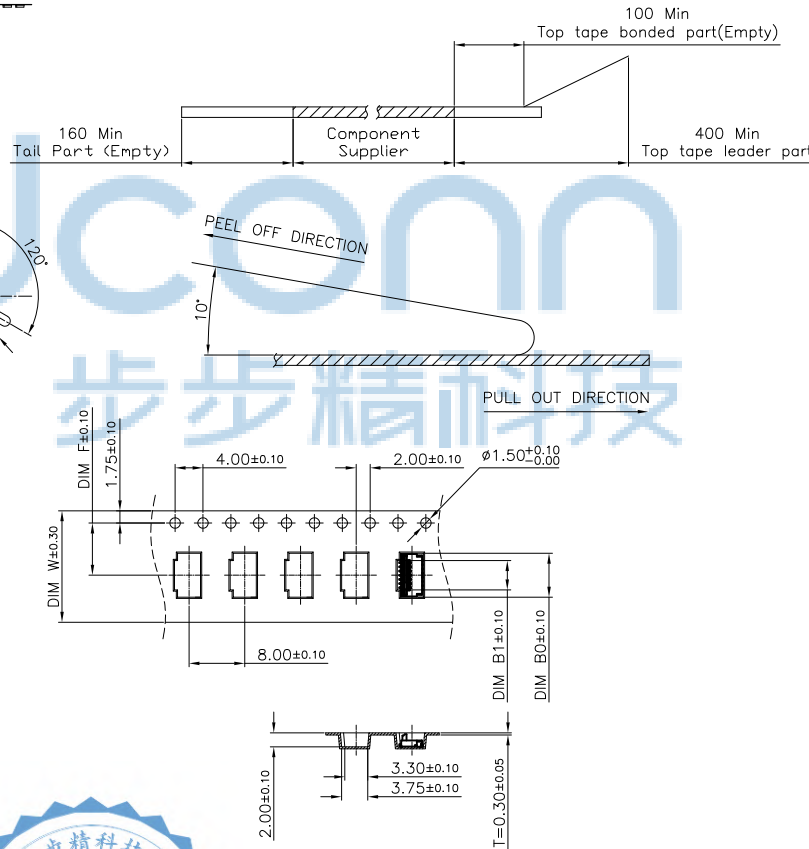

9~47PIN REEL

CKTS	B0	B1	W	W1	F	S
9	4.50	2.40				
11	5.10	3.00				
13	5.70	3.60				
15	6.30	4.20	16.00	16.40	7.50	
17	6.90	4.80				
19	7.50	5.40				
21	8.10	6.00				
23	8.70	6.60				
25	9.30	7.20				
27	9.90	7.80				
29	10.50	8.40				
31	11.10	9.00				
33	11.70	9.60	24.00	24.40	11.50	
35	12.30	10.20				
37	12.90	10.80				
39	13.50	11.40				
41	14.10	12.00				
43	14.70	12.60				
45	15.30	13.20				
47	15.90	13.80				
49	16.50	14.40				
51	17.10	15.00				
53	17.70	15.60				
55	18.30	16.20				
57	18.90	16.80	32.00	32.40	14.20	28.40
59	19.50	17.40				
61	20.10	18.00				
63	20.70	18.60				
65	21.30	19.20				
67	21.90	19.80				
69	22.50	20.40				
71	23.10	21.00	44.00	44.40	20.20	40.40

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd.		深圳市步步精科技有限公司	
Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		NAME: FPC 0.3-11P 后翻式 H=0.9 编带	
PDWG.NO: 0407-1		PJ. NO.: 130-211-110001-W3G	
DR. GZY		SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2 / 2	