
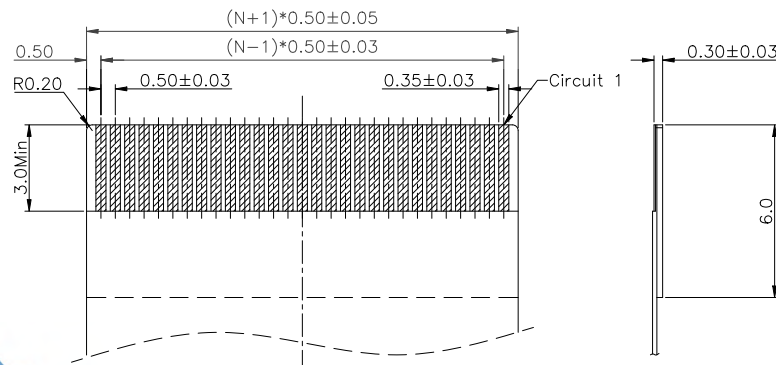
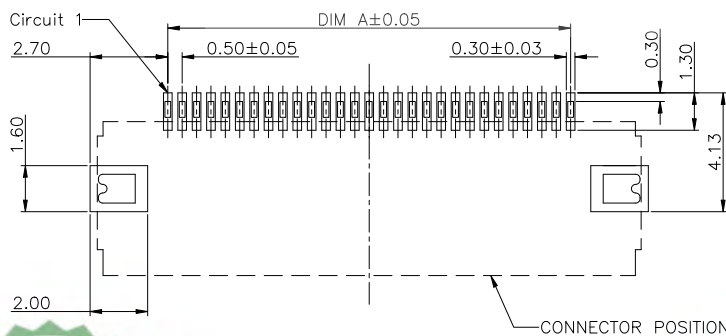

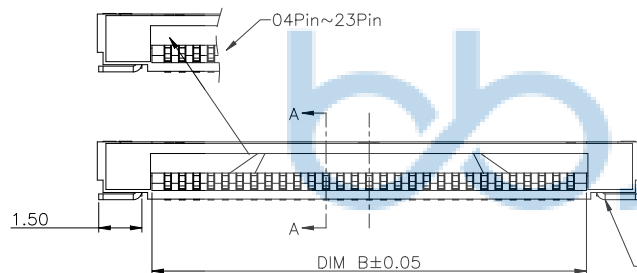



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

Note:

- Material:
 - Housing: thermoplastic high temp.UL94V-0; Color: black.
 - Latch: thermoplastic high temp.UL94V-0; Color: natural.
 - Terminal: copper alloy.
 - Fitting Nail: copper alloy.
- Finish:
 - Terminal:
 - C:Matte-tin 80u"min on contact and solder area
 - 50u"min Nickel under plating over all.
 - I:Gold 1u" on contact and solder area
 - 50u"min Nickel under plating over all.
 - J:Gold 2u" on contact and solder area
 - 50u"min Nickel under plating over all.
 - Fitting Nail:
 - C:Matte-tin 80u"min over all
 - 50u"min Nickel under plating over all.
- Product must comply HF RoHS specification.

CKTS	DIM A	DIM B	DIM C
4	1.50	2.60	6.40
5	2.00	3.10	6.90
6	2.50	3.60	7.40
7	3.00	4.10	7.90
8	3.50	4.60	8.40
9	4.00	5.10	8.90
10	4.50	5.60	9.40
11	5.00	6.10	9.90
12	5.50	6.60	10.40
13	6.00	7.10	10.90
14	6.50	7.60	11.40
15	7.00	8.10	11.90
16	7.50	8.60	12.40
17	8.00	9.10	12.90
18	8.50	9.60	13.40
19	9.00	10.10	13.90
20	9.50	10.60	14.40
21	10.00	11.10	14.90
22	10.50	11.60	15.40
23	11.00	12.10	15.90
24	11.50	12.60	16.40
25	12.00	13.10	16.90
26	12.50	13.60	17.40
27	13.00	14.10	17.90
28	13.50	14.60	18.40
29	14.00	15.10	18.90
30	14.50	15.60	19.40
31	15.00	16.10	19.90
32	15.50	16.60	20.40
33	16.00	17.10	20.90
34	16.50	17.60	21.40
35	17.00	18.10	21.90
36	17.50	18.60	22.40
37	18.00	19.10	22.90
38	18.50	19.60	23.40
39	19.00	20.10	23.90
40	19.50	20.60	24.40
41	20.00	21.10	24.90
42	20.50	21.60	25.40
43	21.00	22.10	25.90
44	21.50	22.60	26.40
45	22.00	23.10	26.90
46	22.50	23.60	27.40
47	23.00	24.10	27.90
48	23.50	24.60	28.40
49	24.00	25.10	28.90
50	24.50	25.60	29.40
51	25.00	26.10	29.90
52	25.50	26.60	30.40
53	26.00	27.10	30.90
54	26.50	27.60	31.40
55	27.00	28.10	31.90
56	27.50	28.60	32.40
57	28.00	29.10	32.90
58	28.50	29.60	33.40
59	29.00	30.10	33.90
60	29.50	30.60	34.40

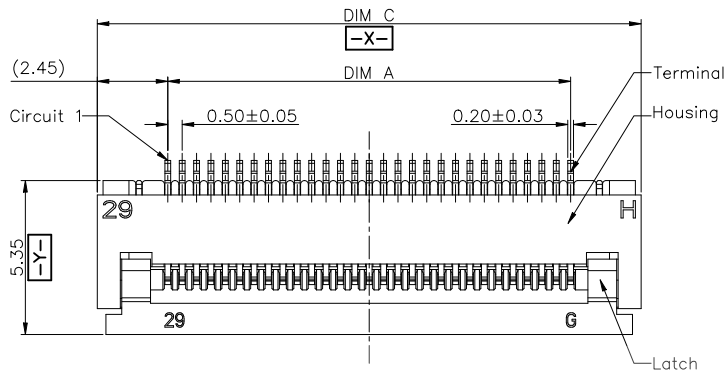

RECOMMENDED P.C.B PATTERN LAYOUT



RECOMMENDED FPC/FFC DIMENSION






THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0407-1

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'
NAME: FPC 0.5-12P 翻盖下接 H=2.0 编带(定制款: 主体黑色 盖子本色)	
APPD. JM_Zheng	PJ. NO.: 130-224-120002-W3G
CHKD. LYX	SIZE: A4 DRW NO.:
DR. SGF	FINISH: SEE NOTES MAT'L: SEE NOTES
	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE.±0.20mm
 2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
 3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
 4. MATERIAL: XXXXX ANTI-STATIC POLYSTYRENE.
 5. THICKNESS: 0.35 ± 0.05 mm.
 6. PACKING LENGTH PER 13" REEL : 24.60METERS.
 7. COMPONENT LOAD PER 13" REEL : 2000PCS.
 8. PEELING OFF FORCE OF TOP TAPE 0.1N~0.7N(10.2gf~71.4gf).

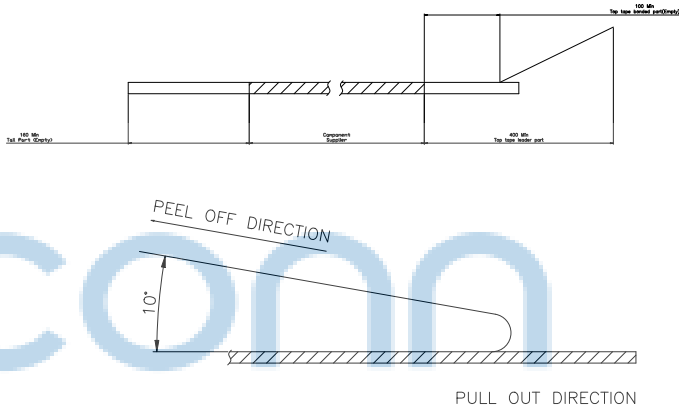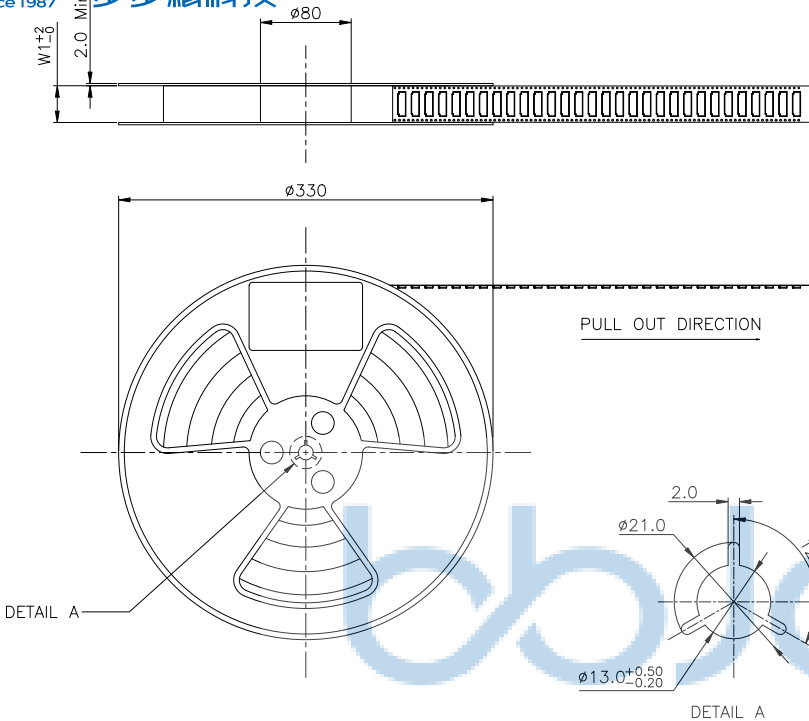

CKTS For 0.5Pitch Conn.	CKTS For 1.0Pitch Conn.	80±0.10	W	W1	F	S0±0.10
4		6.70				
5	2	7.20				
6		7.70				
7	3	8.20				
8		8.70				
9	4	9.20				
10		9.70				
11	5	10.20				
12		10.70				
13	6	11.20				
14		11.70				
15	7	12.20				
16		12.70				
17	8	13.20				
18		13.70				
19	9	14.20				
20		14.70				
21	10	15.20				
22		15.70				
23	11	16.20				
24		16.70				
25	12	17.20				
26		17.70				
27	13	18.20				
28		18.70				
29	14	19.20				
30		19.70				
31	15	20.20				
32		20.70				
33	16	21.20				
34		21.70				
35	17	22.20				
36		22.70				
37	18	23.20				
38		23.70				
39	19	24.20				
40		24.70				
41	20	25.20				
42		25.70				
43	21	26.20				
44		26.70				
45	22	27.20				
46		27.70				
47	23	28.20				
48		28.70				
49	24	29.20				
50		29.70				
51	25	30.20				
52		30.70				
53	26	31.20				
54		31.70				
55	27	32.20				
56		32.70				
57	28	33.20				
58		33.70				
59	29	34.20				
60		34.70				

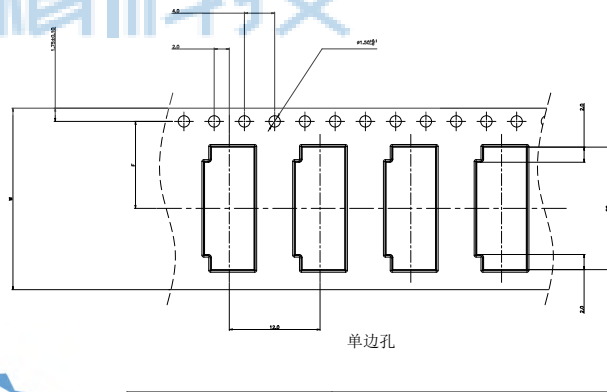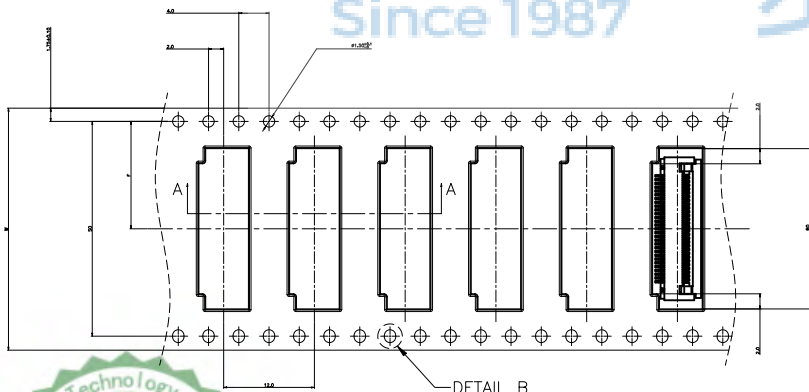

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0407-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

APPD. JM_Zheng
CHKD. LYX
DR. SGF

NAME: FPC 0.5-12P 翻盖下接 H=2.0
编带(定制款: 主体黑色 盖子本色)

PJ. NO.: 130-224-120002-W3G
SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2