

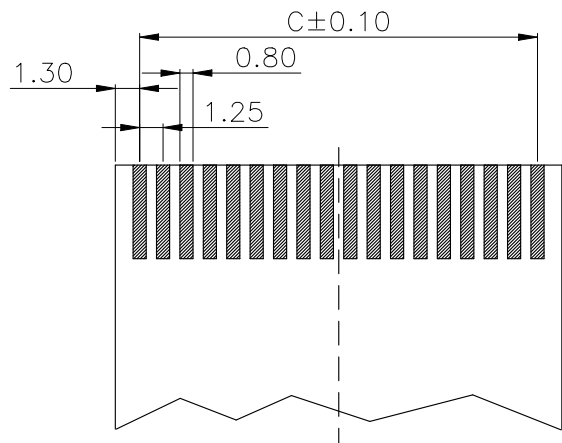
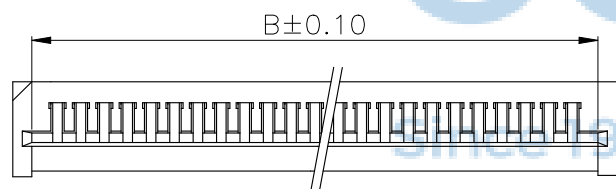
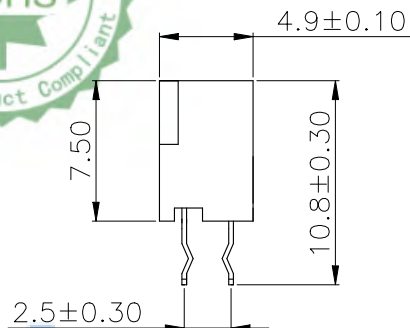


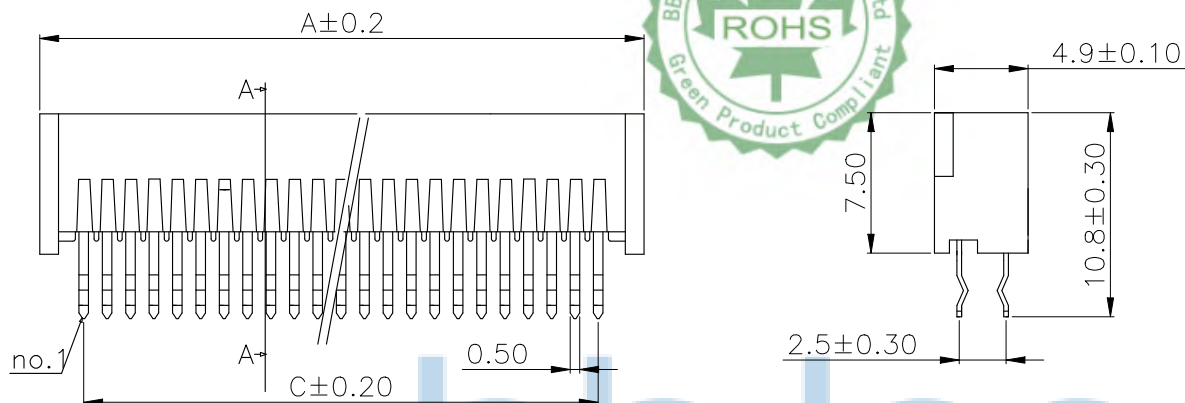

适用电缆(proper cable)
($\delta=0.3\pm0.02\text{mm}$)

0.30±0.02




技术参数

- 间距: 1.25
- 极数: 3~40
- 额定电压: 50V DC/AC
- 额定电流: 0.5A DC/AC
- 耐压值: 500VAC/m
- 工作温度: -25°C~+85°C
- 绝缘电阻: $\geq 500\text{M}\Omega$
- 接触电阻: $\leq 30\text{m}\Omega$


材料

- 接触件: 磷青铜 镀亮锡 (镍Ni30~80u", 锡Sn80~200u") $t=0.25\text{mm}$
- 塑胶主体: PA66 (UL94V-0)

基座Housing

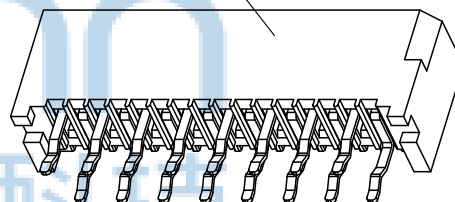

NO.1 端子Contact

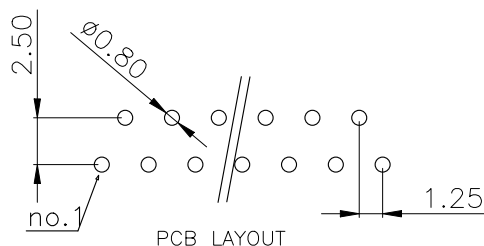

规格尺寸

孔位	A	B	C
3P	7.30	5.10	2.50
4P	8.55	6.35	3.75
5P	9.80	7.60	5.00
6P	11.05	8.85	6.25
7P	12.30	10.10	7.50
8P	13.55	11.35	8.75
9P	14.80	12.60	10.00
10P	16.05	13.85	11.25
11P	17.30	15.10	12.50
12P	18.55	16.35	13.75
13P	19.80	17.60	15.00
14P	21.05	18.85	16.25
15P	22.30	20.10	17.50
16P	23.55	21.35	18.75
17P	24.80	22.60	20.00
18P	26.05	23.85	21.25
19P	27.30	25.10	22.50
20P	28.55	26.35	23.75
21P	29.80	27.60	25.00
22P	31.05	28.85	26.25
23P	32.30	30.10	27.50
24P	33.55	31.35	28.75
25P	34.80	32.60	30.00
26P	36.05	33.85	31.25
27P	37.30	35.10	32.50
28P	38.55	36.35	33.75
29P	39.80	37.60	35.00
30P	41.05	38.85	36.25
31P	42.30	40.10	37.50
32P	43.55	41.35	38.75
33P	44.80	42.60	40.00
34P	46.05	43.85	41.25
35P	47.30	45.10	42.50
36P	48.55	46.35	43.75
37P	49.80	47.60	45.00
38P	51.05	48.85	46.25
39P	52.30	50.10	47.50
40P	53.55	51.35	48.75

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0275-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR

SGF

NAME: FPC 1.25-21P 单面接 直插 H=7.5
DIP 盒装

PJ NO: 130-255-210001-J8G

SIZE: A4 DRW NO:

FINISH: SEE NOTES

SCALE: N/A

MAT'L: SEE NOTES

UNIT: mm PAGE: 1/2

REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

1. 产品使用PVC盒装, 一盒
216PCS成品。




2. 4盒使用PE袋密封后
为“一打”产品数量
864PCS。



- 一. 包装材料:
1. PVC透明盒;
 2. PE密封袋;
 3. 合格标签
 5. 纸箱
 6. 胶带
 7. 打包带



3. 每26打为1箱 (22464PCS)

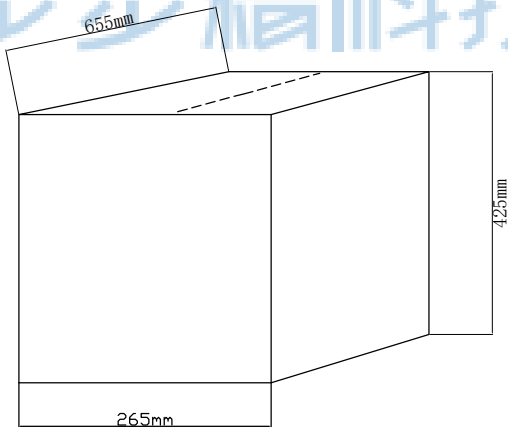

纸箱规格

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0275-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR

NAME: FPC 1.25-21P 单面接 直插 H=7.5
DIP 盒装



PJ NO:130-255-210001-J8G

SIZE:A4 DRW NO:

FINISH:SEE NOTES

MAT'L:SEE NOTES

SCALE:N/A

REV: A0

UNIT:mm

PAGE: 2/2