

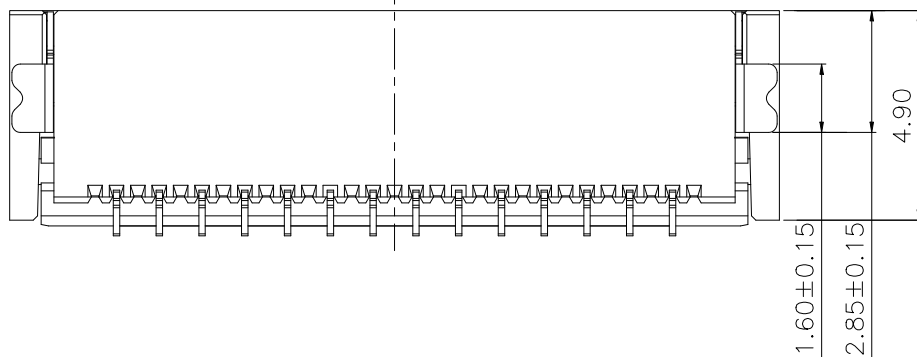
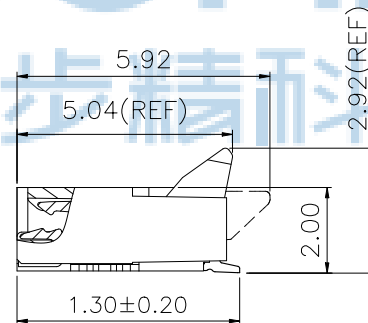
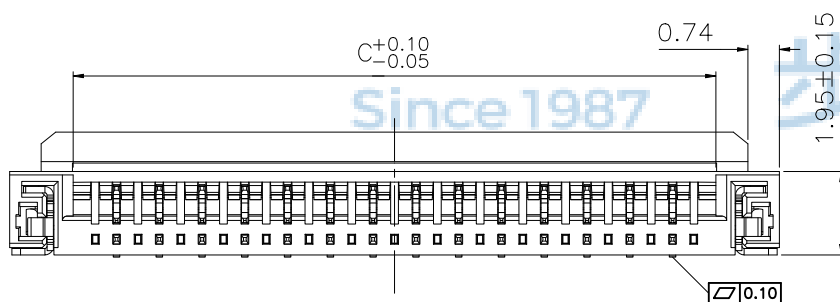
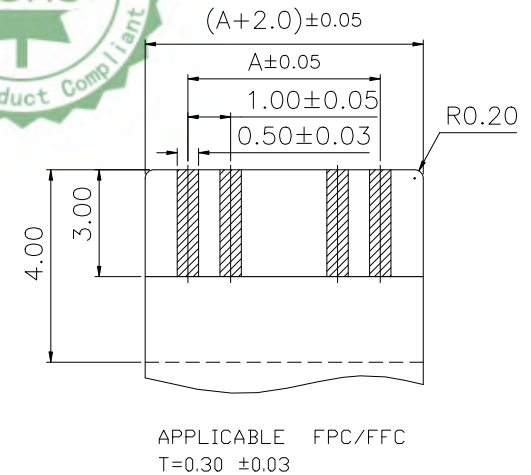


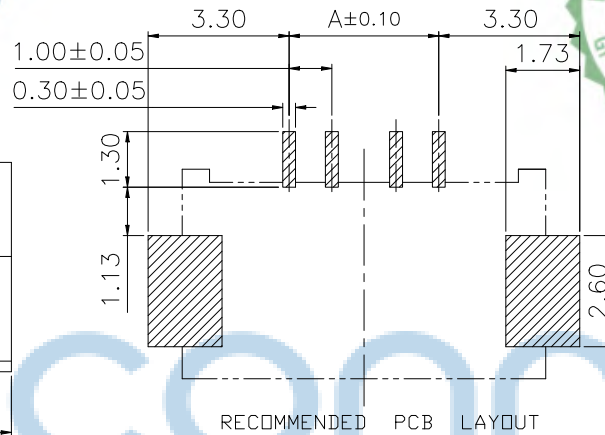

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	GZY

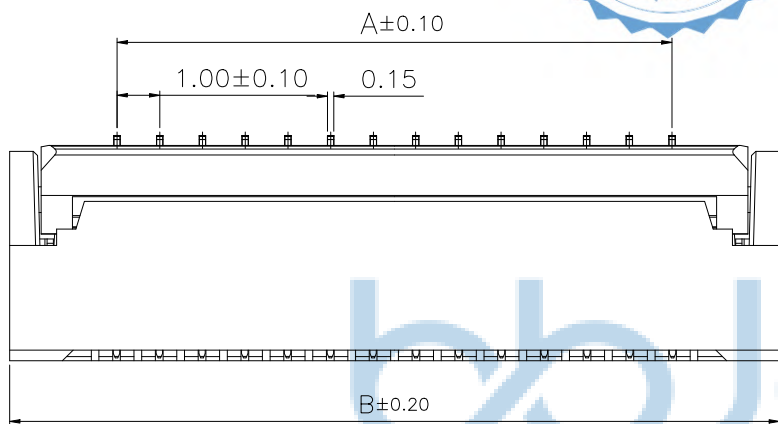


Material:

- Housing: LCP; Color: Natural
Flammability Rating (UL94V-0)
- Cover: PA; Color: Black
Flammability Rating (UL94V-0)
- Contact: Phosphor Bronze
- Leg: Brass

尺寸	A	B	C
4	3.00	8.00	5.05
6	5.00	10.00	7.05
8	7.00	12.00	9.05
9	8.00	13.00	10.05
10	9.00	14.00	11.05
12	11.00	16.00	13.05
15	14.00	19.00	16.50
19	18.00	23.00	20.05
22	21.00	26.00	23.05
24	23.00	28.00	25.05
25	24.00	29.00	26.05

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"	
APPD	JM_Zheng	NAME: FPC 1.0-9P 后翻式 H=2.0 编带	
CHKD	LYX	PJ NO: 130-241-090001-M9G	
PDWG NO:0428-1		SIZE:A4 DRW NO:	
DR		FINISH:SEE NOTES MAT'L:SEE NOTES	
GZY		SCALE:N/A REV:A0 UNIT:mm PAGE:1/2	

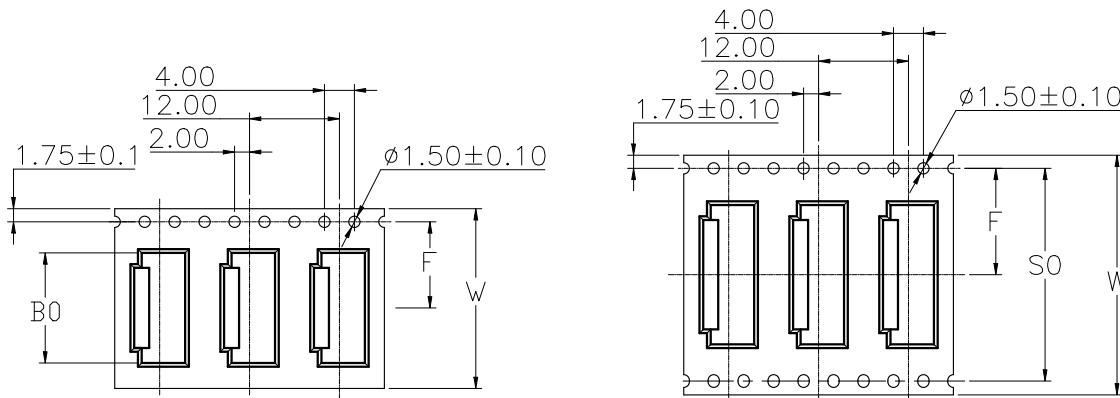


NO. POSITIONS \ DIM	B0±0.10	W	W1	F	S0±0.10
4	8.30	24	24.4	11.5±0.1	---
6	10.30				
8	13.30				
9	14.30				
12	17.30	32	32.4	14.2±0.1	28.4
20	26.30	44	44.4	20.2±0.15	40.4
22	28.30				
24	30.30				

Pull Out Direction

Pull Out Direction

PULL OUT DIRECTION

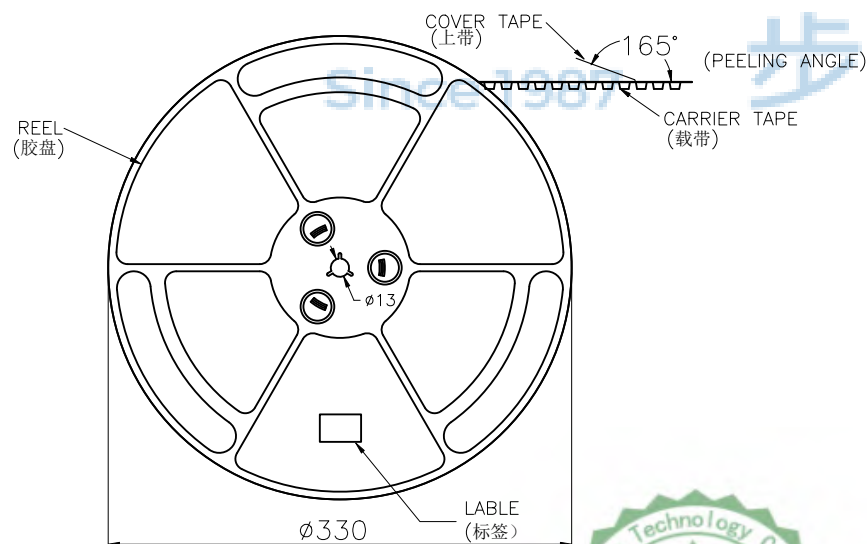

Ref 100 mm Lenght cover tape

22 pcs PRODUCTS

22 pcs PRODUCTS EMPTY (END)


EMPTY (START)

CASED 1,500 pcs PRODUCTS

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 mm.
- 2.Carrier camber is within 1mm in 250 mm.
- 3.Material:transparent conductive polystyrene alloy.
- 4.Material Thickness: 0.3 ± 0.05 mm.
- 5.All dimensions meet EIA-481-C requirements.
- 6.1,500 pcs Pef Reel.

Scale 1:4



THIS DOCUMENT IS THE
SOLE PROPERTY OF

BBJconn Technology Co.,Ltd.
Corporation AND SHOULD

NOT BE USED IN WHOLE

PRIOR WRITTEN PERMISSION

PDWG NO:0428-1



深圳市步步精科技有限公司

NAME: FPC 1.0-9P 后翻式 H=2.0 编带

	PJ NO: 130-241-090001-M9G
---	---------------------------

	SIZE:A4	DRW NO:

FINISH:SEE NOTES	MAT'L:SEE NOTES
------------------	-----------------

SCALE:N/A	REV:A0	UNIT:mm	PAGE:2/2
-----------	--------	---------	----------