


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

技术指标 (Technical Index):


1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围 (Temperature range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
3. 额定电压 (Rated voltage): 50V, AC/DC (=等效).
4. 接触电阻 (Contact resistance): $\leq 0.03\Omega$.
5. 绝缘电阻 (Insulation resistance): $\geq 500\Omega$.




CKT	DIM A	DIM B	DIM C
4	3.00	5.03	11.10
5	4.00	6.03	12.10
6	5.00	7.03	13.10
7	6.00	8.03	14.10
8	7.00	9.03	15.10
9	8.00	10.03	16.10
10	9.00	11.03	17.10
11	10.00	12.03	18.10
12	11.00	13.03	19.10
13	12.00	14.03	20.10
14	13.00	15.03	21.10
15	14.00	16.03	22.10
16	15.00	17.03	23.10
17	16.00	18.03	24.10
18	17.00	19.03	25.10
19	18.00	20.03	26.10
20	19.00	21.03	27.10
21	20.00	22.03	28.10
22	21.00	23.03	29.10
23	22.00	24.03	30.10
24	23.00	25.03	31.10
25	24.00	26.03	32.10
26	25.00	27.03	33.10
27	26.00	28.03	34.10
28	27.00	29.03	35.10
29	28.00	30.03	36.10
30	29.00	31.03	37.10
31	30.00	32.03	38.10
32	31.00	33.03	39.10
33	32.00	34.03	40.10
34	33.00	35.03	41.10
35	34.00	36.03	42.10
36	35.00	37.03	43.10
37	36.00	38.03	44.10
38	37.00	39.03	45.10
39	38.00	40.03	46.10
40	39.00	41.03	47.10



SECTION A-A




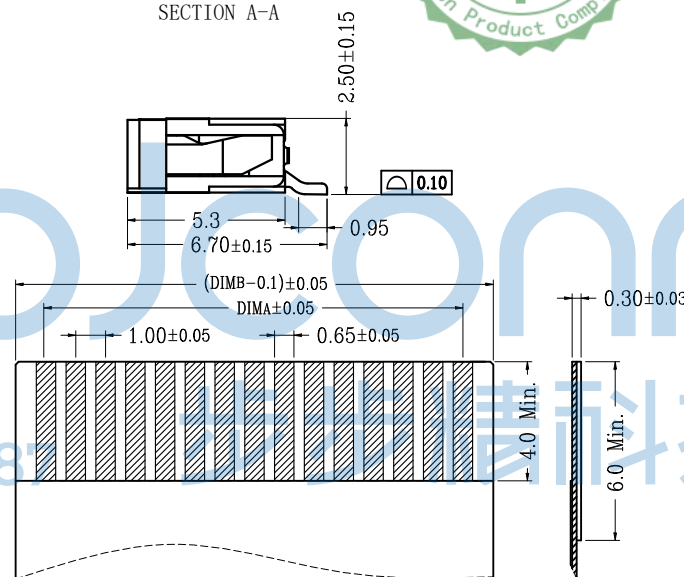


适用扁平线 (Applicable Flat Cable)




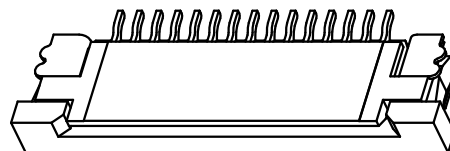


序号	品名	材质
①	1. OK 塑胶壳 (H2.5) 1. OK Type Housing (H2.5)	LCP UL94V-0 本色 Natural
②	1. OK 型下接端子 (H2.5) 1. OK Type Under Terminal (H2.5)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	1. OK 型卧式后盖 (H2.5) 1. OK Type Actuator (H2.5)	LCP UL94V-0 黑色 Black
④	1. OK 型卧式垫片 (H2.5) 1. OK Type Fitting Nail (H2.5)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0456-1		DR. TSP		深圳市步步精科技有限公司 NAME: FPC 1.0-8P 抽拉下接 H=2.5 PJ. NO.: 130-244-080001-X3G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	
---	--	-----------------	--	---------	--	--	--

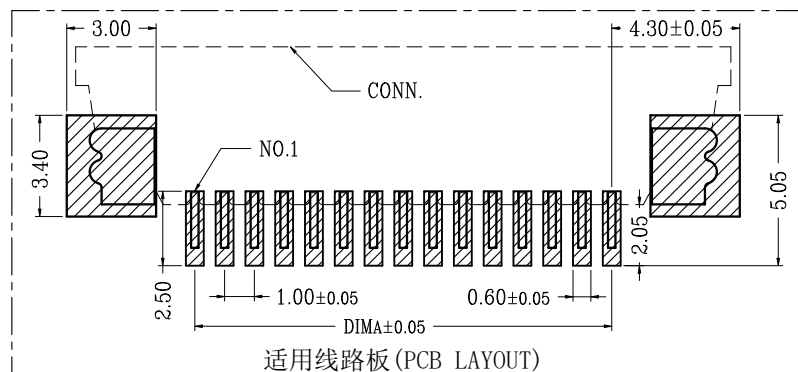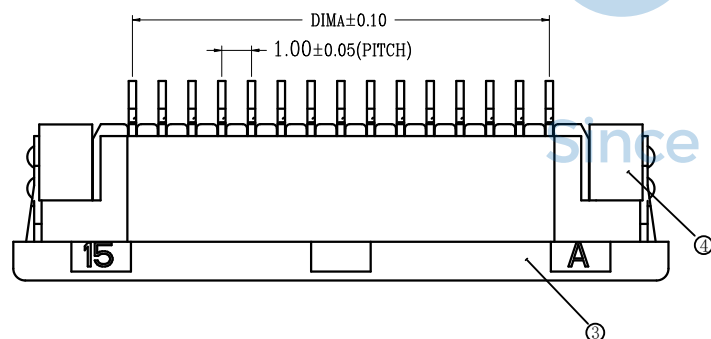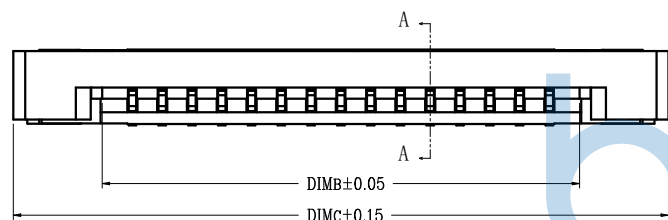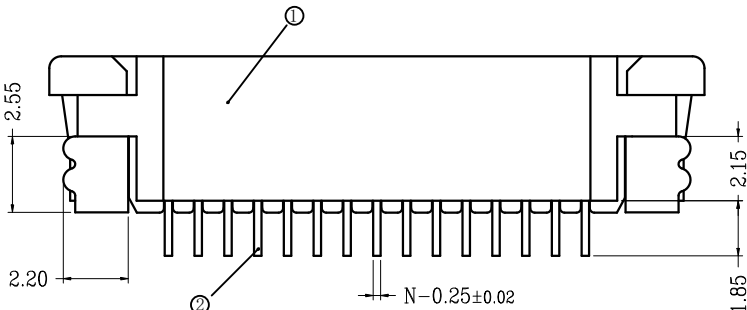

适用线路板 (PCB LAYOUT)

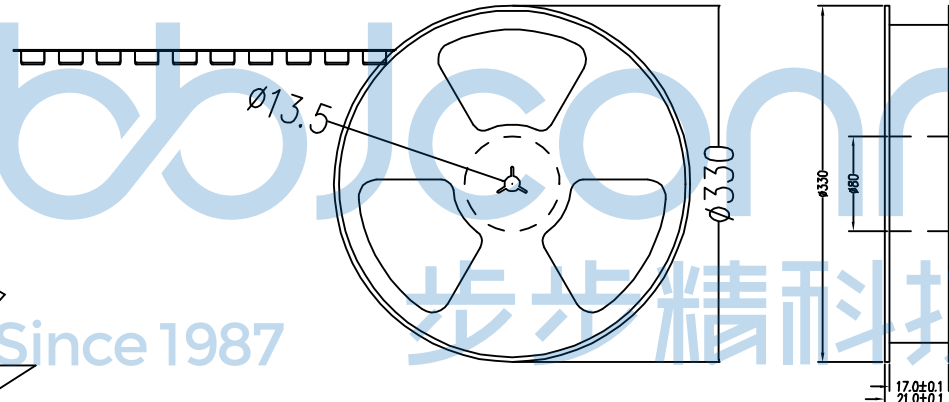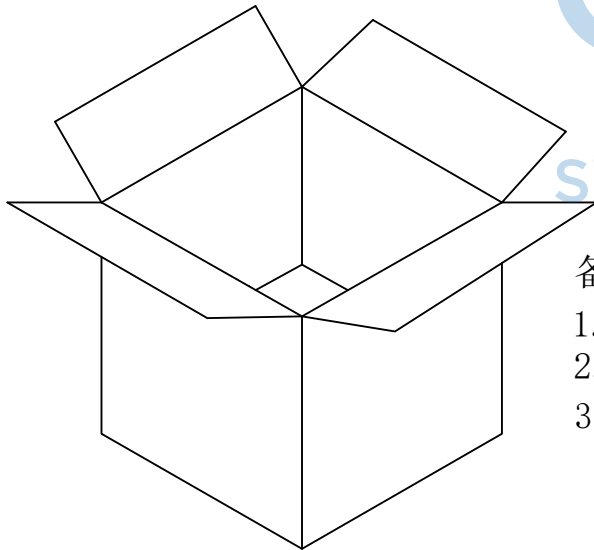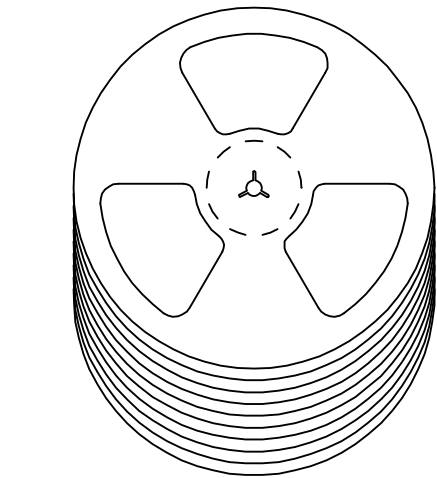

备注:

- 包装数量: 1500/PCS/卷, 10卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0456-1			深圳市步步精科技有限公司			
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		.X°: ±3° .X°: ±2° .XX°: ±1°		NAME: FPC 1.0-8P 抽拉下接 H=2.5	
	APPD.	JM_Zheng		PJ. NO.: 130-244-080001-X3G		
	CHKD.	LYX		SIZE: A4 DRW NO.:		
				FINISH: SEE NOTES MAT'L.: SEE NOTES		
DR. TSP		SCALE: N/A REV.: A0		UNIT: mm	PAGE: 2/2	