

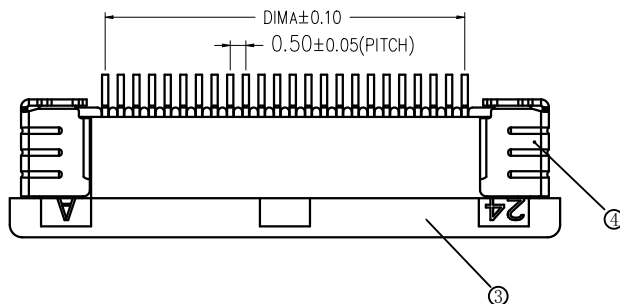
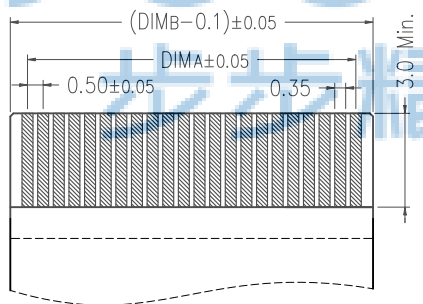
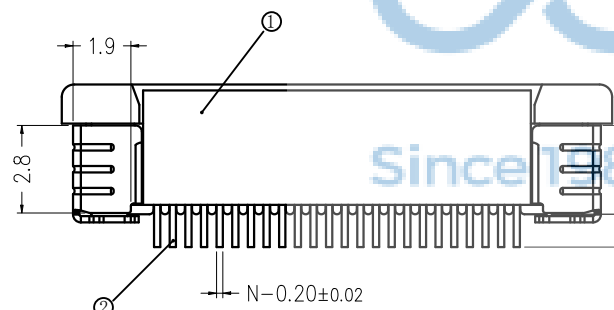

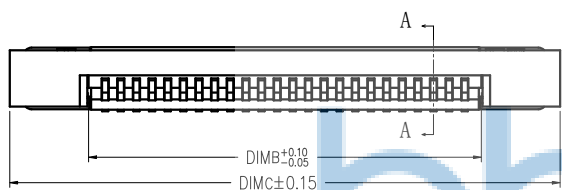


SECTION A-A



适用扁平线(Applicable Flat Cable)

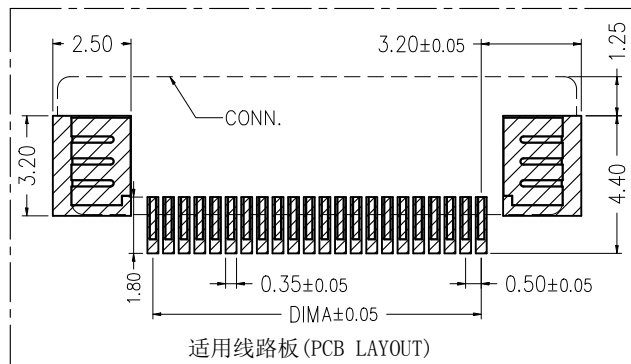

序号 No.	品名Name	材质Material
①	0.5拉拔3代胶芯(H2.0) 0.5 Pitch ZIF Type 3 Housing (H=2.0)	LCP UL94V-0 本色 Natural
②	0.5拉拔下端子(H2.0) 0.5 Pitch H2.0 ZIF R/A Type Under terminal	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	0.5拉拔3代后盖(H2.0) 0.5 Pitch ZIF Type 3 Actuator (H=2.0)	LCP UL94V-0 黑色 Black
④	0.5拉拔3代焊片(H2.0) 0.5 Pitch ZIF Type 3 Fitting Nail (H=2.0)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

技术指标(Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围(Temperature range): -25° C~+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC(=等效).
4. 接触电阻(Contact resistance): ≤0.03Ω.
5. 绝缘电阻(Insulation resistance): ≥500MΩ.



CKT	DIM A	DIM B	DIM C	DIM D	CKT	DIM A	DIM B	DIM C	DIM D
4	1.50	2.56	7.60	5.20	33	16.00	17.06	22.10	5.20
5	2.00	3.06	8.10		34	16.50	17.56	22.60	
6	2.50	3.56	8.60		35	17.00	18.06	23.10	
7	3.00	4.06	9.10		36	17.50	18.56	23.60	
8	3.50	4.56	9.60		37	18.00	19.06	24.10	
9	4.00	5.06	10.10		38	18.50	19.56	24.60	
10	4.50	5.56	10.60		39	19.00	20.06	25.10	
11	5.00	6.06	11.10		40	19.50	20.56	25.60	
12	5.50	6.56	11.60		41	20.00	21.06	26.10	
13	6.00	7.06	12.10		42	20.50	21.56	26.60	
14	6.50	7.56	12.60		43	21.00	22.06	27.10	
15	7.00	8.06	13.10		44	21.50	22.56	27.60	
16	7.50	8.56	13.60		45	22.00	23.06	28.10	
17	8.00	9.06	14.10		46	22.50	23.56	28.60	
18	8.50	9.56	14.60		47	23.00	24.06	29.10	
19	9.00	10.06	15.10		48	23.50	24.56	29.60	
20	9.50	10.56	15.60	5.75	49	24.00	25.06	30.10	5.75
21	10.00	11.06	16.10		50	24.50	25.56	30.60	
22	10.50	11.56	16.60		51	25.00	26.06	31.10	
23	11.00	12.06	17.10		52	25.50	26.56	31.60	
24	11.50	12.56	17.60		53	26.00	27.06	32.10	
25	12.00	13.06	18.10		54	26.50	27.56	32.60	
26	12.50	13.56	18.60		55	27.00	28.06	33.10	
27	13.00	14.06	19.10		56	27.50	28.56	33.60	
28	13.50	14.56	19.60		57	28.00	29.06	34.10	
29	14.00	15.06	20.10		58	28.50	29.56	34.60	
30	14.50	15.56	20.60		59	29.00	30.06	35.10	
31	15.00	16.06	21.10		60	29.50	30.56	35.60	
32	15.50	16.56	21.60						



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG. NO: 0456-1



深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME:
FPC 0.5-21P 抽拉下接 H=2.0 编带

APPD. JM_Zheng

PJ. NO.: 130-221-210001-X3G




CHKD. LYX

SIZE: A4 DRW NO.:


DR. TSP

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

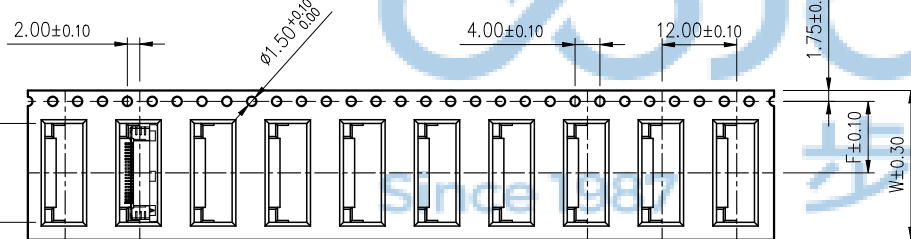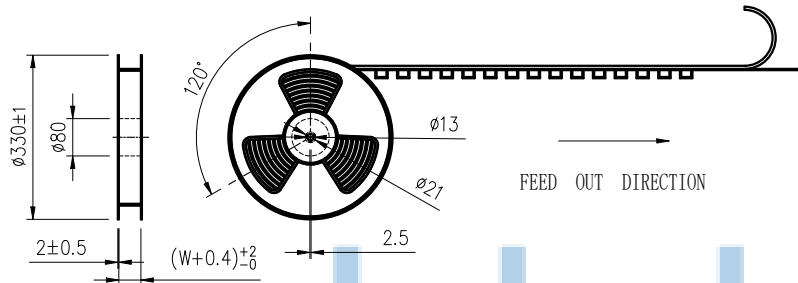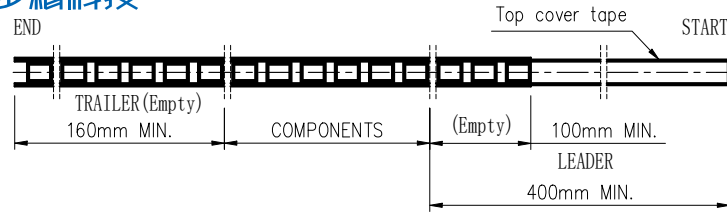


CKT (0.5mm pitch)	W	PCS/REEL	REEL/CARTON	SUM (PCS)
4	16	2000	14	28000
5		2000	14	28000
6		2000	14	28000
7		2000	14	28000
8		2000	14	28000
9		2000	10	20000
10		2000	10	20000
11		2000	10	20000
12	24	2000	10	20000
13		2000	10	20000
14		2000	10	20000
15		2000	10	20000
16		2000	10	20000
17		2000	10	20000
18		2000	10	20000
19		2000	10	20000
20		2000	10	20000
21		2000	10	20000
22		2000	10	20000



NOTE(注):

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2 mm.
(10片孔距累积公差 ± 0.2 mm.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
(载带拱/弧形MAX:1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: BLACK ANTISTATIC PS.
(载带材料: 黑色抗静电PS.)
5. THICKNESS: 0.30 ± 0.05 mm. (载带厚度: 0.30 ± 0.05 mm.)
6. PACKING LENGTH PER REEL: 25 METERS. (每卷包装长度: 25米.)
7. COMPONENT LOAD PER REEL: 2000 PCS. (每卷包装数量: 2000只, 前后各空包24只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及聚乙烯填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

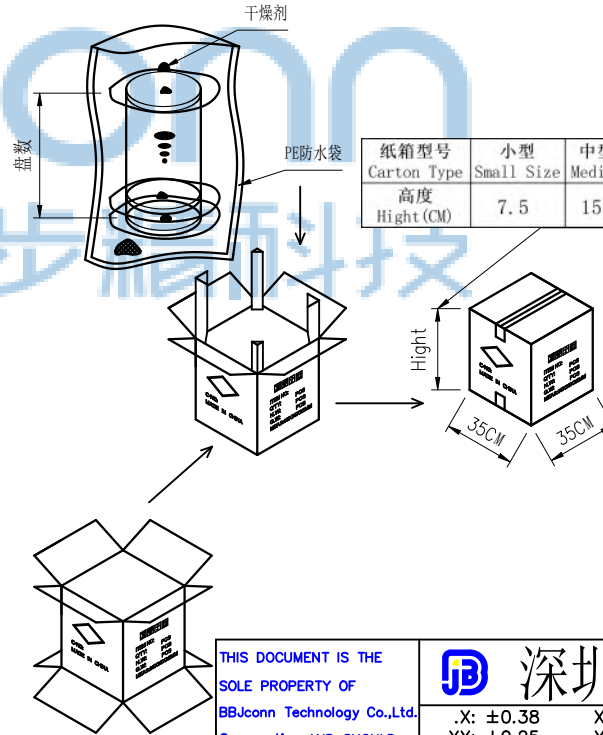

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32

CKT (0.5mm pitch)	B0	W	F
4	7.90	16	7.5
5	8.40		
6	8.90		
7	9.40		
8	9.90		
9	10.40		
10	10.90		
11	11.40		
12	11.90	24	11.5
13	12.40		
14	12.90		
15	13.40		
16	13.90		
17	14.40		
18	14.90		
19	15.40		
20	15.90		
21	16.40		
22	16.90		

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG, NO: 0456-1

深圳市步步精科技有限公司
X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$
APPD. JM_Zheng
CHKD. LYX
DR. TSP

NAME:
FPC 0.5-21P 抽拉下接 H=2.0 编带
P.J. NO.: 130-221-210001-X3G
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2