



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

技术指标:


1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
3. 额定电压: 50V, AC/DC (等效).
4. 接触电阻: $\leq 0.03\Omega$.
5. 绝缘电阻: $\geq 500M\Omega$.







CKT	DIMA	DIMB	DIMC
4	3.00	5.03	11.10
5	4.00	6.03	12.10
6	5.00	7.03	13.10
7	6.00	8.03	14.10
8	7.00	9.03	15.10
9	8.00	10.03	16.10
10	9.00	11.03	17.10
11	10.00	12.03	18.10
12	11.00	13.03	19.10
13	12.00	14.03	20.10
14	13.00	15.03	21.10
15	14.00	16.03	22.10
16	15.00	17.03	23.10
17	16.00	18.03	24.10
18	17.00	19.03	25.10
19	18.00	20.03	26.10
20	19.00	21.03	27.10
21	20.00	22.03	28.10
22	21.00	23.03	29.10
23	22.00	24.03	30.10
24	23.00	25.03	31.10
25	24.00	26.03	32.10
26	25.00	27.03	33.10
27	26.00	28.03	34.10
28	27.00	29.03	35.10
29	28.00	30.03	36.10
30	29.00	31.03	37.10
31	30.00	32.03	38.10
32	31.00	33.03	39.10
33	32.00	34.03	40.10
34	33.00	35.03	41.10
35	34.00	36.03	42.10
36	35.00	37.03	43.10
37	36.00	38.03	44.10
38	37.00	39.03	45.10
39	38.00	40.03	46.10
40	39.00	41.03	47.10

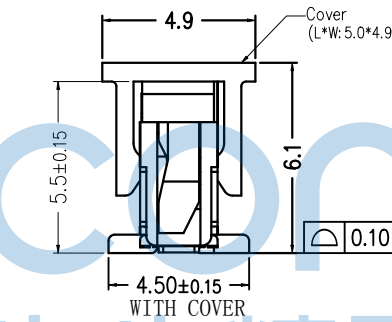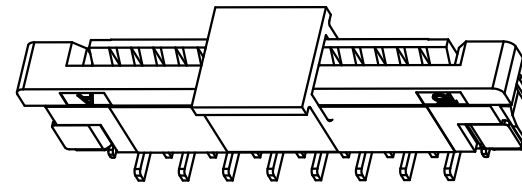

SECTION A-A




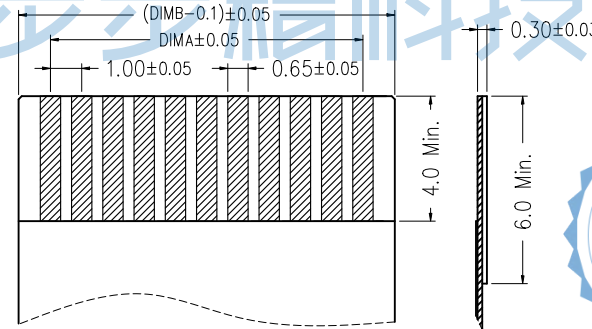


适用扁平线 (Applicable Flat Cable)

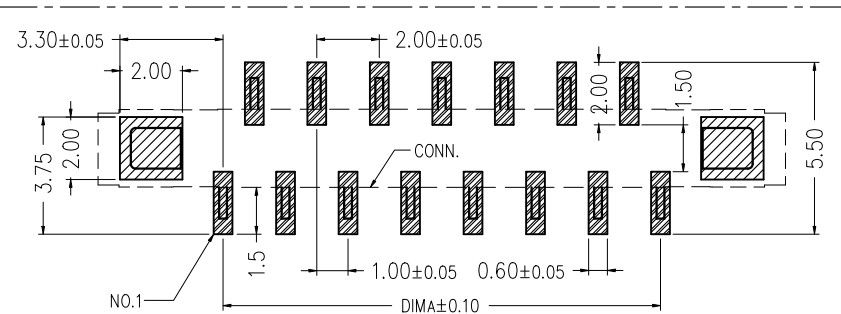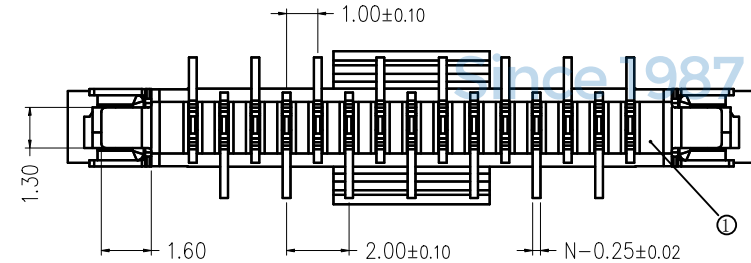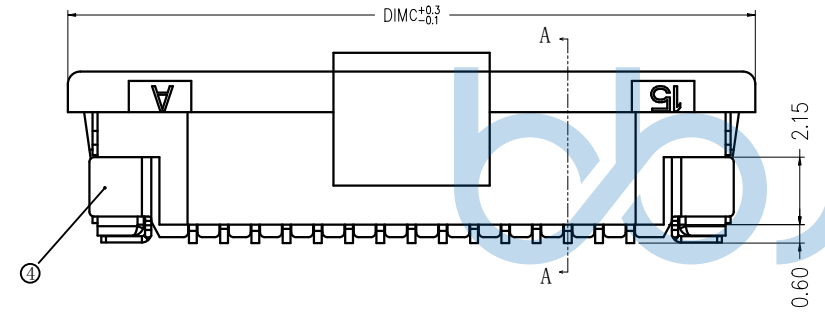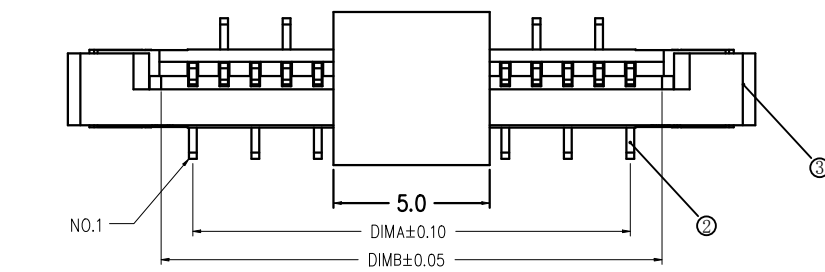

适用线路板 (PCB LAYOUT)

序号	品名	材质	THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
①	1.0 K型胶芯 (H2.5)	LCP UL94V-0 本色	.X: ± 0.38	.XX: ± 0.25	.XXX: ± 0.13	X': $\pm 3^{\circ}$	X'': $\pm 2^{\circ}$	X''': $\pm 1^{\circ}$	NAME:	FPC 1.0-4P 正位立贴 H=5.50 加盖编带
②	1.0 K型立式端子 (H5.5)	磷青铜/基层镀镍 30"80U, 表面镀雾锡80"160U	APPD.	JM_Zheng	CHKD.	LYX	DR.	TSP	PJ. NO.: 130-244-040002-X3G	SIZE: A4 DRW NO.:
③	1.0 K型卧式盖 (H2.5)	LCP UL94V-0 黑色	FINISH: SEE NOTES				MAT'L.: SEE NOTES			
④	1.0 K型立式焊片 (H5.5)	黄铜/基层镀镍 30"80U, 表面镀亮锡80"160U	SCALE: N/A				REV.: A0			
PDWG. NO: 0456-1			UNIT: mm				PAGE: 1/2			

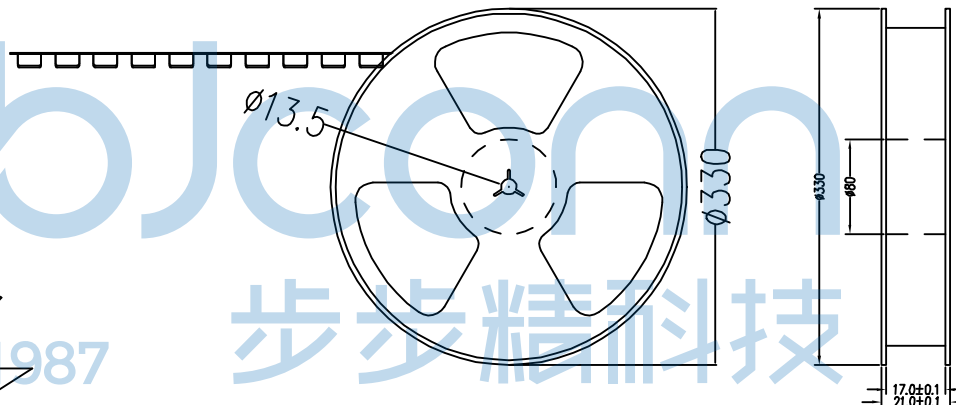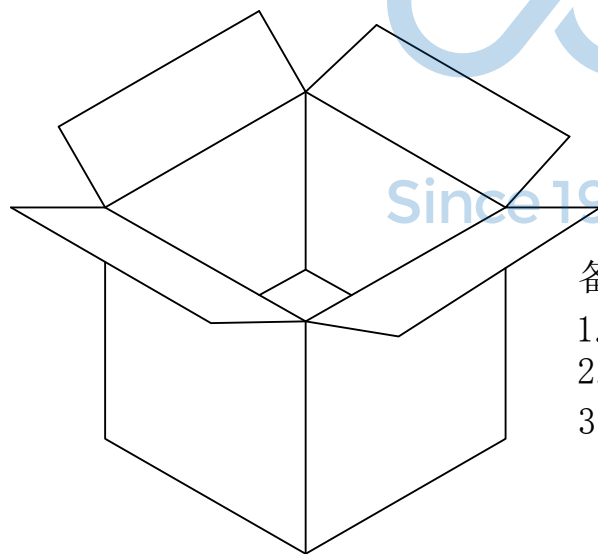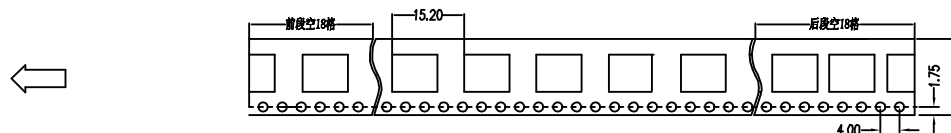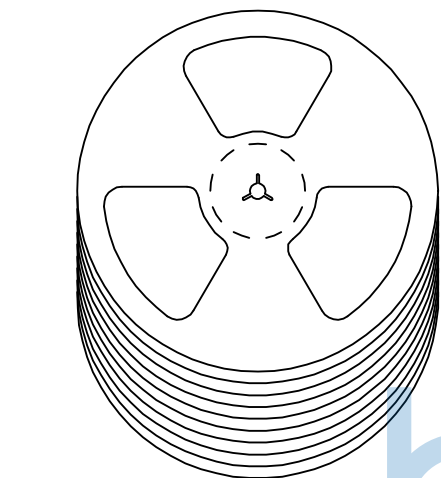

备注:

1. 包装数量: 900/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS),
上带: 聚乙烯 (PET),
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	NAME: FPC 1.0-4P 正位立贴 H=5.50 加盖编带	
APPD.	JM_Zheng	P.J. NO.: 130-244-040002-X3G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO: 0456-1	DR.	TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2